

JIRAE

Chief Editor:

Henry Novianus Palit
Petra Christian University
Indonesia

Editorial Board:

Willyanto Anggono
Petra Christian University
Indonesia

Leopoldo Eduardo Cárdenas-Barrón
Instituto Tecnológico y de Estudios
Superiores de Monterrey
Mexico

Chi-Hung Chi
CSIRO
Australia

Julien Dubois
Universite de Bourgogne
France

Masashi Emoto
Akikusa Gakuen Junior College
Japan

Akihiro Hayakawa
Tohoku University
Japan

Shiyong Liao
Chongqing University of Technology
China

Felix Pasila
Petra Christian University
Indonesia

Roberto Rojas-Cessa
New Jersey Institute of Technology
USA

Dong-Youn Shin
Pukyong National University
South Korea

Yung Ting
Chung Yuan Christian University
Republic of China (Taiwan)

Hanny Hosiana Tumbelaka
Petra Christian University
Indonesia

I.N.G. Wardana
Brawijaya University
Indonesia

Moeljono Widjaja
Agency for the Assessment and
Application of Technology
Indonesia

I Gede Agus Widyadana
Petra Christian University
Indonesia


Jonas C.P. Yu
Takming University of Science and
Technology
Republic of China (Taiwan)

[HOME](#) [CALL FOR PAPERS](#) [AUTHOR GUIDELINES](#) [ABOUT](#) [LOG IN](#) [ARCHIVES](#)

[ANNOUNCEMENTS](#)

Home > **Vol 3, No 2 (2018)**

International Journal of Industrial Research and Applied Engineering



JIRAE is an **Open Access** peer-reviewed international journal providing a medium for the academic and industrial community to share cutting-edge research and development in various aspects of industrial technology and applied engineering. The three-pronged objectives are:

- To encourage research work in the field of industrial technology and applied engineering among scientists, researchers, engineering practitioners, and industrial experts to improve efficiency, reduce costs, and generate high-quality products / services;
- To promote the adoption and development of comprehensive and state-of-the-art technologies for enterprises and industries;
- To bridge the theoretical and practical gap between academia and industry, and advocate collaboration to address enterprise and industry challenges.

JIRAE is published semiannually - in April and October - by the Institute of Research and Community Outreach, Petra Christian University.

Vol 3, No 2 (2018)

Table of Contents

Articles

Experimental Study of Combustion Fluctuation Reduction Using In-Cylinder Pressure Estimation in Gasoline Engine	PDF
Mitsuhsia Ichianagi, Willyanto Anggono, Edyta Dzieminska, Takashi Suzuki	51-60
Development of On-board Polytropic Index Prediction Model for Injection Timing Optimization of Diesel Engines	PDF
Mitsuhsia Ichianagi, Hayao Joji, Hiroki Matsui, Emir Yilmaz, Takashi Suzuki	61-68
Development of On-Board In-Cylinder Gas Flow Model for Heat Loss Estimation of Diesel Engines	PDF
Mitsuhsia Ichianagi, Kazuki Kojima, Hayao Joji, Hiroki Matsui, Takashi Suzuki	69-78
Game Popularity Tracking System	PDF
Joseph Alexander Budiarto	79-85

Online ISSN: 2407-7259

2033 Visitors: [View Stats](#)

Indexed by:



JOURNAL CONTENT

Search

Browse

- [By Issue](#)

- [By Author](#)
- [By Title](#)

FONT SIZE

DOAJ

DIRECTORY OF
OPEN ACCESS
JOURNALS

Supported by:



JIRAE

Chief Editor:

Henry Novianus Palit
Petra Christian University
Indonesia

Editorial Board:

Willyanto Anggono
Petra Christian University
Indonesia

Leopoldo Eduardo Cárdenas-Barrón
Instituto Tecnológico y de Estudios
Superiores de Monterrey
Mexico

Chi-Hung Chi
CSIRO
Australia

Julien Dubois
Universite de Bourgogne
France

Masashi Emoto
Akikusa Gakuen Junior College
Japan

Akihiro Hayakawa
Tohoku University
Japan

Shiyong Liao
Chongqing University of Technology
China

Felix Pasila
Petra Christian University
Indonesia

Roberto Rojas-Cessa
New Jersey Institute of Technology
USA

Dong-Youn Shin
Pukyong National University
South Korea

Yung Ting
Chung Yuan Christian University
Republic of China (Taiwan)

Hanny Hosiana Tumbelaka
Petra Christian University
Indonesia

I.N.G. Wardana
Brawijaya University
Indonesia

Moeljono Widjaja
Agency for the Assessment and
Application of Technology
Indonesia

I Gede Agus Widyadana
Petra Christian University
Indonesia

Jonas C.P. Yu
Takming University of Science and
Technology
Republic of China (Taiwan)

JOURNAL CONTENT

Search

All

Search

Browse

- [By Issue](#)

[HOME](#) [CALL FOR PAPERS](#) [AUTHOR GUIDELINES](#) [ABOUT](#) [LOG IN](#) [ARCHIVES](#)


[ANNOUNCEMENTS](#)

Home > [Archives](#)


Archives

2018

[Vol 3, No 2 \(2018\)](#)



[Vol 3, No 1 \(2018\)](#)



2017

[Vol 2, No 1 \(2017\)](#)

2016

[Vol 1, No 1 \(2016\)](#)

1 - 4 of 4 Items

Online ISSN: 2407-7259

2153 Visitors: [View Stats](#)

Indexed by:



Supported by:

JIRAE

Chief Editor:

Henry Novianus Palit
Petra Christian University
Indonesia

Editorial Board:

Willyanto Anggono
Petra Christian University
Indonesia

Leopoldo Eduardo Cárdenas-Barrón
Instituto Tecnológico y de Estudios
Superiores de Monterrey
Mexico

Chi-Hung Chi
CSIRO
Australia

Julien Dubois
Universite de Bourgogne
France

Masashi Emoto
Akikusa Gakuen Junior College
Japan

Akihiro Hayakawa
Tohoku University
Japan

Shiyong Liao
Chongqing University of Technology
China

Felix Pasila
Petra Christian University
Indonesia

Roberto Rojas-Cessa
New Jersey Institute of Technology
USA

Dong-Youn Shin
Pukyong National University
South Korea

Yung Ting
Chung Yuan Christian University
Republic of China (Taiwan)

Hanny Hosiana Tumbelaka
Petra Christian University
Indonesia

I.N.G. Wardana
Brawijaya University
Indonesia

Moeliono Widjaja
Agency for the Assessment and
Application of Technology
Indonesia

I Gede Agus Widyadana
Petra Christian University
Indonesia

Jonas C.P. Yu
Takming University of Science and
Technology
Republic of China (Taiwan)

[HOME](#) [CALL FOR PAPERS](#) [AUTHOR GUIDELINES](#) [ABOUT](#) [LOG IN](#) [ARCHIVES](#)

[ANNOUNCEMENTS](#)

Home > About the Journal > **Journal Contact**

Journal Contact

Mailing Address

JIRAE office
Institute of Research and Community Outreach
Petra Christian University
Siwalankerto 121-131, Surabaya - Indonesia

Principal Contact

Henry Novianus Palit
Petra Christian University
Institute of Research and Community Outreach
Petra Christian University
Siwalankerto 121-131, Surabaya - Indonesia
Email: chief-editor@jirae.org

Support Contact

Henry Palit
Email: chief-editor@jirae.org

Online ISSN: 2407-7259

2153 Visitors: [View Stats](#)

Indexed by:



Supported by:



JOURNAL CONTENT

Search

All

Browse

- [By Issue](#)

JIRAE

Chief Editor:

Henry Novianus Palit
Petra Christian University
Indonesia

Editorial Board:

Willyanto Anggono
Petra Christian University
Indonesia

Leopoldo Eduardo Cárdenas-Barrón
Instituto Tecnológico y de Estudios
Superiores de Monterrey
Mexico

Chi-Hung Chi
CSIRO
Australia

Julien Dubois
Universite de Bourgogne
France

Masashi Emoto
Akikusa Gakuen Junior College
Japan

Akihiro Hayakawa
Tohoku University
Japan

Shiyong Liao
Chongqing University of Technology
China

Felix Pasila
Petra Christian University
Indonesia

Roberto Rojas-Cessa
New Jersey Institute of Technology
USA

Dong-Youn Shin
Pukyong National University
South Korea

Yung Ting
Chung Yuan Christian University
Republic of China (Taiwan)

Hanny Hosiana Tumbelaka
Petra Christian University
Indonesia

I.N.G. Wardana
Brawijaya University
Indonesia

Moeljono Widjaja
Agency for the Assessment and
Application of Technology
Indonesia

I Gede Agus Widyadana
Petra Christian University
Indonesia

Jonas C.P. Yu
Takming University of Science and
Technology
Republic of China (Taiwan)

[HOME](#) [CALL FOR PAPERS](#) [AUTHOR GUIDELINES](#) [ABOUT](#) [LOG IN](#) [ARCHIVES](#)

[ANNOUNCEMENTS](#)

[Home](#) > [About the Journal](#) > [Editorial Team](#)

Editorial Team

Chief Editor

[Henry Novianus Palit](#), Petra Christian University, Indonesia

Editorial Board

[Willyanto Anggono](#), Petra Christian University, Indonesia
[Leopoldo Eduardo Cárdenas-Barrón](#), Instituto Tecnológico y de Estudios Superiores de Monterrey, Mexico
[Chi-Hung Chi](#), CSIRO, Australia
[Julien Dubois](#), Universite de Bourgogne, France
[Masashi Emoto](#), Akikusa Gakuen Junior College, Japan
[Akihiro Hayakawa](#), Tohoku University, Japan
[Shiyong Liao](#), Chongqing University of Technology, China
[Felix Pasila](#), Petra Christian University, Indonesia
[Roberto Rojas-Cessa](#), New Jersey Institute of Technology, United States
[Dong-Youn Shin](#), Pukyong National University, South Korea
[Yung Ting](#), Chung Yuan Christian University, Republic of China (Taiwan)
[Hanny Hosiana Tumbelaka](#), Petra Christian University, Indonesia
[I.N.G. Wardana](#), Brawijaya University, Indonesia
[Moeljono Widjaja](#), Agency for the Assessment and Application of Technology, Indonesia
[I Gede Agus Widyadana](#), Petra Christian University, Indonesia
[Jonas C.P. Yu](#), Takming University of Science and Technology, Republic of China (Taiwan)

Online ISSN: 2407-7259

2033 Visitors: [View Stats](#)

Indexed by:



Supported by:



JOURNAL CONTENT

Search

All

Browse

- [By Issue](#)

JIRAE

Chief Editor:

Henry Novianus Palit
Petra Christian University
Indonesia

Editorial Board:

Willyanto Anggono
Petra Christian University
Indonesia

Leopoldo Eduardo Cárdenas-Barrón
Instituto Tecnológico y de Estudios
Superiores de Monterrey
Mexico

Chi-Hung Chi
CSIRO
Australia

Julien Dubois
Universite de Bourgogne
France

Masashi Emoto
Akikusa Gakuen Junior College
Japan

Akihiro Hayakawa
Tohoku University
Japan

Shiyong Liao
Chongqing University of Technology
China

Felix Pasila
Petra Christian University
Indonesia

Roberto Rojas-Cessa
New Jersey Institute of Technology
USA

Dong-Youn Shin
Pukyong National University
South Korea

Yung Ting
Chung Yuan Christian University
Republic of China (Taiwan)

Hanny Hosiana Tumbelaka
Petra Christian University
Indonesia

I.N.G. Wardana
Brawijaya University
Indonesia

Moeljono Widjaja
Agency for the Assessment and
Application of Technology
Indonesia

I Gede Agus Widyadana
Petra Christian University
Indonesia

Jonas C.P. Yu
Takming University of Science and
Technology
Republic of China (Taiwan)

JOURNAL CONTENT

Search

All

Search

Browse

- [By Issue](#)

[HOME](#) [CALL FOR PAPERS](#) [AUTHOR GUIDELINES](#) [ABOUT](#) [LOG IN](#) [ARCHIVES](#)

[ANNOUNCEMENTS](#)

[Home](#) > [About the Journal](#) > **[Submissions](#)**

Submissions

- » [Online Submissions](#)
- » [Guides for Authors](#)
- » [Copyright Notice](#)
- » [Privacy Statement](#)

Online Submissions

Already have a Username/Password for International Journal of Industrial Research and Applied Engineering?

[GO TO LOGIN](#)

Need a Username/Password?

[GO TO REGISTRATION](#)

Registration and login are required to submit items online and to check the status of current submissions.

Guides for Authors

Authors need to accomodate their paper using [JIRAE paper template](#).

JIRAE is a peer-reviewed international journal providing a medium for the academic and industrial community to share cutting-edge research and development in various aspects of industrial technology and applied engineering. The three-pronged objectives are:

- To encourage research work in the field of industrial technology and applied engineering among scientists, researchers, engineering practitioners, and industrial experts to improve efficiency, reduce costs, and generate high-quality products / services;
- To promote the adoption and development of comprehensive and state-of-the-art technologies for enterprises and industries;
- To bridge the theoretical and practical gap between academia and industry, and advocate collaboration to address enterprise and industry challenges.

The aims of *JIRAE* is to publish a wide range of research and application papers which describe, but not restricted to, laboratory, numerical investigations, report on full scale projects, detailed case studies, review articles as well as short communications and discussions. *JIRAE* welcomes papers with the above aim and scopes.

JIRAE is published semiannually – in April and October – by the Institute of Research and Community Outreach, Petra Christian University.

Plagiarism Screening

Plagiarism is a threat to scholarly publishing in general and to *JIRAE* in particular. Originality of the submitted work can be assured through plagiarism screening and rejection of suspected material. For maximum effectiveness, all articles submitted to *JIRAE* shall be sent to a plagiarism detection process prior to submission.

Review

All papers will be assigned to independent experts for peer-review. A single-blind review is applied, where authors' identities are known to reviewers. Based on the comments and advice of the peer-reviewers, the *Editor* will make a decision to accept, to reject, or to ask authors to revise the manuscript. For *Minor Revisions* the authors will have one week to resubmit their revised manuscript. For *Major Revisions* the authors will have two weeks to resubmit their revised manuscript. However, authors should contact the editorial office if extended revision time is

- [By Author](#)
- [By Title](#)

FONT SIZE

anticipated. All reviewer comments should be responded to in a point-by-point fashion. Where the author is unable to respond, they must provide a clear response.

Production and Publication

Once accepted, the manuscript will undergo professional copy-editing, English editing, proofreading by the authors, final corrections, pagination, and, publication on the <http://www.jirae.org> website.

Copyright/Open Access

Articles published in *JIRAE* will be Open-Access articles distributed under the terms and conditions of the Creative Commons Attribution License (CC BY). *JIRAE* allows the author(s) to hold the copyright and to retain the publishing rights.

Authors are responsible for obtaining permission to reproduce any figures from other copyright holder, for which copyright exists.

Submission Preparation Checklist

As part of the submission process, authors are required to check off their submission's compliance with all of the following items, and submissions may be returned to authors that do not adhere to these guidelines.

1. The submission has not been previously published, nor is it before another journal for consideration (or an explanation has been provided in Comments to the Editor).
2. The submission file is in OpenOffice, Microsoft Word, RTF, or WordPerfect document file format.
3. Where available, URLs for the references have been provided.
4. The text is single-spaced; uses a 12-point font; employs italics, rather than underlining (except with URL addresses); and all illustrations, figures, and tables are placed within the text at the appropriate points, rather than at the end.
5. The text adheres to the stylistic and bibliographic requirements outlined in the [Author Guidelines](#), which is found in About the Journal.
6. If submitting to a peer-reviewed section of the journal, the instructions in [Ensuring a Blind Review](#) have been followed.

Copyright Notice

Authors who publish with this journal agree to the following terms:

1. Authors retain the copyright and publishing right, and grant the journal right of first publication with the work simultaneously licensed under a [Creative Commons Attribution License](#) that allows others to share the work with an acknowledgement of the work's authorship and initial publication in this journal.
2. Authors are able to enter into separate, additional contractual arrangements for the non-exclusive distribution of the journal's published version of the work (e.g., post it to an institutional repository or publish it in a book), with an acknowledgement of its initial publication in this journal.
3. Authors are permitted and encouraged to post their work online (e.g., in institutional repositories or on their website) following the publication of the article, as it can lead to productive exchanges, as well as earlier and greater citation of published work (See [The Effect of Open Access](#)).



Privacy Statement

The names and email addresses entered in this journal site will be used exclusively for the stated purposes of this journal and will not be made available for any other purpose or to any other party.

Online ISSN: 2407-7259

2033 Visitors: [View Stats](#)

Indexed by:



DOAJ

DIRECTORY OF
OPEN ACCESS
JOURNALS

Supported by:



Experimental Study of Combustion Fluctuation Reduction Using In-Cylinder Pressure Estimation in Gasoline Engine

Mitsuhisa Ichiyanagi^{1,a}, Willyanto Anggono^{1,2,3,b}, Edyta Dzieminska^{1,c}, Takashi Suzuki^{1,d}

¹Department of Engineering and Applied Sciences, Sophia University, Tokyo, Japan

²Mechanical Engineering Department, Petra Christian University, Surabaya, Indonesia

³Centre for Sustainable Energy Studies, Petra Christian University, Surabaya, Indonesia

^aichiyanagi@sophia.ac.jp, ^bwilly@petra.ac.id, ^cedyta.d@sophia.ac.jp,

^dsuzu-tak@sophia.ac.jp

Abstract. Gasoline engines need to reduce its negative emission waste and raise its thermal efficiency. Previous studies have shown an improvement of engines by regulating the ignition timing and retaining the engine at certain air-to-fuel ratio. Additional development of the thermal efficiency is anticipated by reducing the oscillation of pressure due to combustion (referred to as combustion fluctuation) during each cycle. Reducing the combustion fluctuations promotes the generation of a stable combustion field and improves fuel consumption. Since the combustion fluctuations are significantly affected by the in-cylinder pressure at compression top dead center (referred to as TDC pressure), the present study proposes a method to estimate the TDC pressure in the next cycle. The estimation was conducted by measuring the in-cylinder pressure at exhaust valve opening in the given cycle. This study also developed the method to reduce the combustion fluctuations by using the TDC pressure estimation and controlling the ignition timing. In our experiments, it was found that the developed methods reduced the fluctuations of the indicated mean effective pressure (IMEP), the maximum in-cylinder pressure, and the TDC pressure by 62.1%, 51.2%, and 38.5%, respectively.

Keywords: Combustion Fluctuation, In-Cylinder Pressure, IMEP, Spark Ignition Engine, Ignition Timing Control.

1. Introduction

In response to the requirements for increasing the fuel efficiency and reducing the harmful exhaust gas generation in gasoline engines, the previous studies have observed some of the regulatory requirements by adjusting the air-to-fuel ratio (A/F), the timing for ignition, and other performance factors of engine [1–9]. However, one factor is not considered as part of improving the variation of pressure in the combustion stroke per cycle. This factor is known as “combustion fluctuation” and degrades the engine performance. Although the techniques such as the lean-burn and the exhaust gas recirculation (EGR) have been proposed for improving the fuel consumption and the exhaust gas emission, they also give an increase in the combustion fluctuation. Some studies have reported that the reduced combustion fluctuation can decrease the harmful exhaust emissions and increase the fuel efficiency [10–16]. Consequently, it is expected to develop a new method that consider the reduction of combustion fluctuation.

The previous studies have revealed several key characteristics of the combustion fluctuation [17–20]. Since the pressure fluctuations in the intake, compression, and expansion strokes are extremely small in comparison with those in the combustion stroke, these small fluctuations can be regarded as identical in successive cycles. Accordingly, the combustion

fluctuation is dependent on the residual gas and the indicated mean effective pressure (IMEP) that is defined as the indicated work divided by the stroke volume. The present study focuses on the correlation between the combustion fluctuation and the IMEP. The previous studies [21–26] investigated the effects of the IMEP on the various parameters, and it was found that the maximum in-cylinder pressure has a huge effect on the IMEP. As described later, the in-cylinder pressure at compression top dead center (referred to as TDC pressure) is strongly correlated with the maximum in-cylinder pressure. This means that the pressure during TDC has the potential to be an indicator for combustion fluctuation. For the quantitative evaluation of these relations, the in-cylinder pressure data were acquired by using pressure sensors. The highly robust sensors have been designed before for controlling the engine [27–36]. However, these sensors have not been installed in gasoline engines due to its relatively high expense compared to the small engine control effect. In the present study, it is expected to develop the high-performance control method using the pressure sensors.

The objectives of the present study are to propose the method using the in-cylinder pressure sensor for the estimation of the TDC pressure in the next cycle and to develop two types of methods for maintaining a constant TDC pressure. Maintaining constant TDC pressure is done by using the proposed estimation methods and controlling the ignition timing, which

causes keeping the maximum in-cylinder pressure and the IMEP as well as reducing the combustion fluctuation. Furthermore, the present reduction method was validated by applying these methods to a single cylinder at a given engine speed under the lean-burn conditions which are equal to the high A/F conditions.

2. Experimental Setup and Condition

2.1. Experimental Setup

Figure 1 shows the experimental system configuration including the electronic control unit (ECU) for the ignition timing and A/F control, and Table 1 lists the specifications of the engine used in the experiments. The engine speed was maintained under constant value by using the low inertia dynamometer (Horiba, Ltd., Dynas3 LI250), whose absorbing rated power is 250 kW and absorbing rated speed is 4980 r.min⁻¹. The temperatures of cooling water and lubricating oil were held constant at 80°C by using temperature regulator. The cylinder head was equipped with the piezoelectric pressure transducer (Kistler Japan Co., Ltd., 6117A) to measure the in-cylinder pressure with 0.001 MPa resolution at 1 °CA intervals in conjunction with the rotary encoder, along with the data logger. On the other hand, the required resolution for the pressure measurement in the present study was on the order of 1/100 for the TDC pressure (0.01 MPa), which means that the pressure sensor used in the present study satisfied the required resolution. The influence of the drift in the obtained data was negligible, because the pressure data were adjusted for the bottom dead center (BDC) pressure at the intake stroke in each cycle. The A/F sensor (Horiba, Ltd, MEXA-720NOx) was set at 370 mm downstream from the cylinder block. The newly developed method was used to control the ignition timing for the actual engine, which was programmed by using the numerical analysis software (MathWorks, Inc., MATLAB®) and transmitted to the ECU via the multi-channel A/D board (dSPACE GmbH, DS2002).

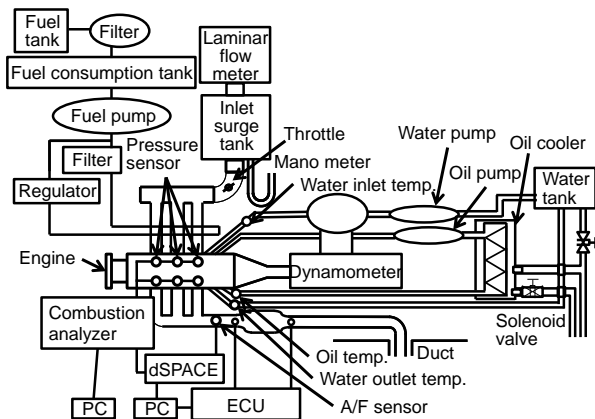


Figure 1. Schematic diagram of the experimental gasoline engine with engine control unit and pressure sensor for pressure measurement in the cylinder

Table 1. Specification of gasoline engine

Type	Gasoline 4 stroke
Layout of engine	V type 6 cylinder
Shape of chamber room	Pent roof type
Displacement	3.456 L
Fuel injection type	EFI, Direct injection

2.2. Experimental Conditions

Table 2 shows the experimental conditions whose condition 1 was used in Section 3 and conditions 2 and 3 were used in Section 4. The experiments under the condition 1 were performed by varying only the A/Fs while the engine speed and the ignition timing were set to be constant. The results were used to propose the estimation method for the TDC pressure in the next cycle by using the in-cylinder pressure in the given cycle and to develop the reduction method of the combustion fluctuation. The experiments described in Section 4 were performed to validate the reduction method developed in Section 3. Both the engine speed and the A/F were kept at the constant value, while the ignition timing was changed either manually (the condition 2, absence of control) or automatically (the condition 3, with control). Without the control conditions, 7 ignition times were manually set and the IMEP from the time evolution of the in-cylinder pressure for each ignition timing condition was evaluated. With the control conditions, the standard ignition timing was set at 35 °CA before TDC, which is the reference ignition timing of original ECU. The IMEP was evaluated when the TDC pressure was in constant value by controlling the ignition timing. For all experimental conditions, the fuel injection rate correction through the feedback control using the oxygen sensor was not conducted.

Table 2. Experimental condition

Condition 1 (for Section 3)	
Engine speed	[r.min ⁻¹] 1,800
Boost pressure	[kPa] -66.7
Coolant temperature	[K] 353
Air temperature	[K] 296
Ignition timing (BTDC)	[°CA] 35
Air-to-fuel ratio	[-] 14.7, 16.0, 16.5, 17.0
Condition 2 (for Section 4)	
Engine speed	[r.min ⁻¹] 1,800
Boost pressure	[kPa] -66.7
Coolant temperature	[K] 353
Air temperature	[K] 296
Ignition timing (BTDC)	[°CA] 29, 31, 33, 35, 37, 39, 41
Air-to-fuel ratio	[-] 17.0
Ignition timing control	Without control
Condition 3 (for Section 4)	
Engine speed	[r.min ⁻¹] 1,800
Boost pressure	[kPa] -66.7
Coolant temperature	[K] 353
Air temperature	[K] 296
Ignition timing (BTDC)	[°CA] 35 (changed by control)
Air-to-fuel ratio	[-] 17.0
Ignition timing control	With control

3. Development of Reduction Method of Combustion Fluctuation

3.1. Relationship between IMEP and TDC Pressure

Figure 2 shows in-cylinder pressure curves in respect to the angle of the crank, which were obtained for a randomly selected set of five cycles. The ignition timing of this condition was set at 35 °CA before TDC (thus $\theta = 325$ °CA). We could observe the combustion fluctuations in the approximate range of 10 °CA before TDC (thus $\theta = 350$ °CA) to 20 °CA after TDC ($\theta = 380$ °CA), which should be reduced by maintaining almost the same in-cylinder pressure curves during each cycle. The IMEP is generally used as an indicator to the state of combustion in gasoline engines and its calculation requires the integration of the in-cylinder pressure during each cycle. Thus, the IMEP is inappropriate to a control indicator for the reduction of combustion fluctuation.

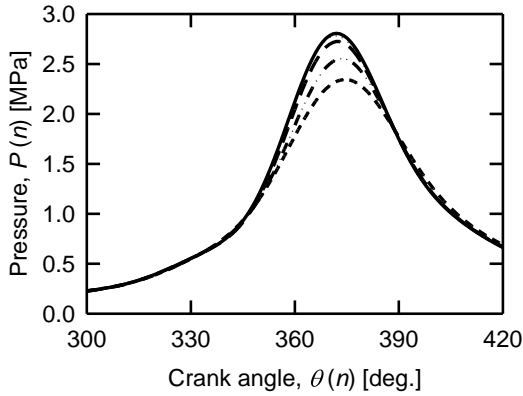


Figure 2. Pressure as function of crank angle under condition 1 at A/F of 17.0

The previous studies show the qualitative correlation between the IMEP, P_{IMEP} , and the maximum in-cylinder pressure, P_{max} . Figure 3 plots the time evolutions of the IMEP and the ultimate in-cylinder pressure with condition 1 at A/F of 17.0. Figure 4 shows the distributions of the probability density functions, in which ΔP_{IMEP} and ΔP_{max} represent the absolute difference values from the 500 cycle average P_{IMEP} and those from the 500 cycle average P_{max} , respectively. The quantitative evaluation, the standard deviation, the averaged value, and the oscillation ratio of P_{IMEP} and P_{max} under the condition 1 at each of the four A/Fs are shown in Table 3, where the fluctuation ratio was defined as the standard deviation divided by the average value. It is obvious from Table 3 that the fluctuation ratios for both P_{IMEP} and P_{max} increase with increasing the A/F (i.e., the lean-burn condition), which suggests that there is a correlation between the above two parameters.

Figure 5 shows the correlation between the IMEP and the ultimate in-cylinder pressure with condition 1 at the A/F of 17.0, and the solid line indicates the correlation line. The figure provides the quantitative confirmation of the positive correlation between the two

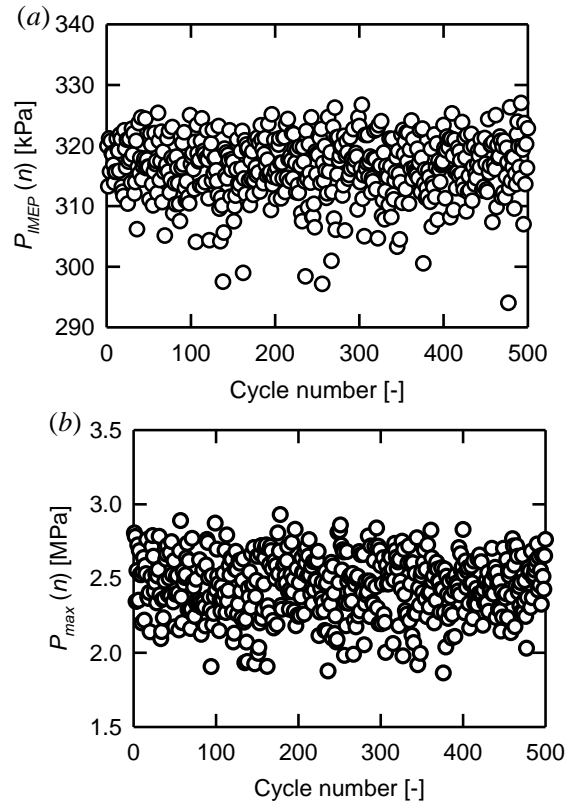


Figure 3. Evolution of time for (a) IMEP and (b) ultimate in-cylinder pressure with condition 1 at A/F of 17.0

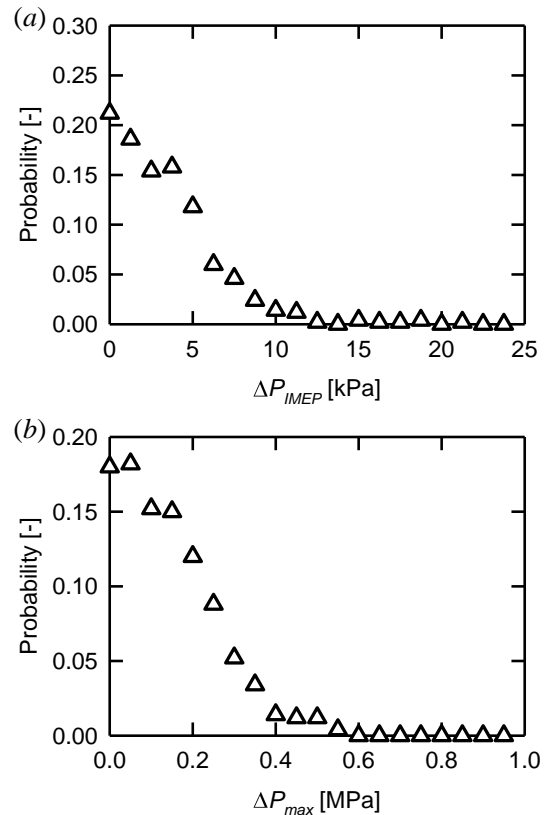


Figure 4. Distribution of probability density with function of absolute value of difference for (a) IMEP and (b) maximum in-cylinder pressure with condition 1 at A/F of 17.0

parameters with a correlation coefficient of 0.59, and the similar correlation coefficients were obtained for all four A/Fs in the condition 1. Since the correlation coefficient larger than 0.5 was regarded as indicating the moderately strong correlation, the combustion fluctuation was evaluated by using P_{max} , instead of P_{IMEP} . As shown in Table 3, since the largest fluctuation ratio was observed at the A/F of 17.0, we developed the reduction method of the combustion fluctuation (described in Section 3.2) and validated the effectiveness of the method (described in Section 4) under the condition of the A/F of 17.0.

Table 3. Standard deviation average value and fluctuation ratio of (a) IMEP and (b) ultimate in-cylinder pressure with condition 1 at each A/F

(a) IMEP, P_{IMEP}			
Air-to-fuel ratio [-]	Average [kPa]	Standard deviation [kPa]	Fluctuation ratio [%]
14.7	355	3.45	0.97
16.0	339	3.66	1.08
16.5	329	3.82	1.16
17.0	316	5.03	1.59

(b) Maximum in-cylinder pressure, P_{max}			
Air-to-fuel ratio [-]	Average [MPa]	Standard deviation [MPa]	Fluctuation ratio [%]
14.7	2.91	0.17	5.95
16.0	2.75	0.16	5.97
16.5	2.62	0.17	6.42
17.0	2.45	0.20	8.23

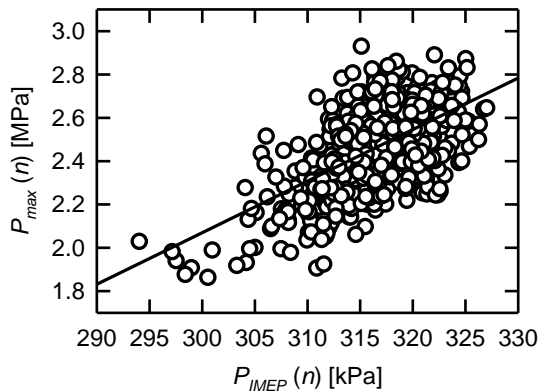


Figure 5. Relationship between maximum in-cylinder pressure and IMEP under condition 1 at A/F of 17.0; solid line indicates the correlation line

Furthermore, in accordance with the computational processing speed and the data transmission speed, the in-cylinder pressure used in the control was obtained at 0.25 ms intervals for the implementation of the procedure developed in Section 3.2. With the engine speed of 1,800 r.min⁻¹ used throughout this study, this interval corresponded to the sampling rate for every 2.7 °CA. Since the maximum in-cylinder pressure, P_{max} , occurs at a different crank angle in each cycle, it is necessary to obtain the pressure data at the sampling rate for every 1 °CA at least. Hence, the use of the maximum in-cylinder pressure for controlling the ignition timing process with the present system would

result in the decreased accuracy (in the future, an increase in computational processing speed and data transmission speed may overcome this shortcoming). The present study investigated the tentative use of the TDC pressure, P_{TDC} , as the control indicator, in place of P_{max} . Figure 6 shows the correlation between the TDC pressure and the maximum in-cylinder pressure, and the correlation coefficient between the two pressures was estimated to be 0.95. This result indicated that P_{TDC} was substituted for P_{max} as the control indicator for the reduction of combustion fluctuation under the present conditions shown in Table 2.

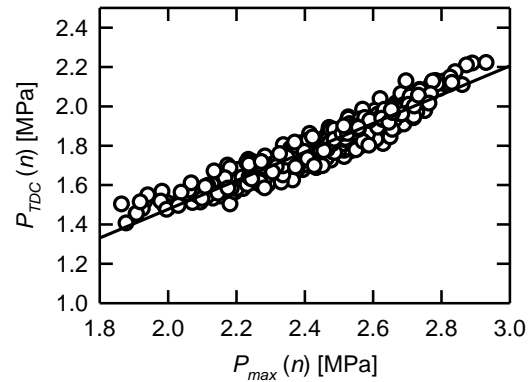


Figure 6. Relationship between TDC pressure and maximum in-cylinder pressure under condition 1 at A/F of 17.0

3.2. Combustion Fluctuation Reduction Method by Using TDC Pressure

As described in Section 3.1, the TDC pressure is the indicator of combustion fluctuation. To accommodate such condition, we considered a method for the estimation of the TDC pressure in the next cycle and proposed a method for the reduction of combustion fluctuation based on the estimated TDC pressure through the ignition timing control. The previous studies [37–40] showed that the above pressures are dependent on the in-cylinder pressure at the exhaust-valve opening (referred to as EVO pressure) and the in-cylinder pressure at the intake-valve opening (referred to as IVO pressure), and the inter-cycle changes in the IVO pressure were much smaller than those in the EVO pressure. Thus, the TDC pressure, P_{TDC} , might be expected to correlate closely to the EVO pressure, P_4 . If the cycle-averaged TDC pressure in the next cycle, $P_{TDC-ave}(n+1)$, could be predicted by measuring the cycle-averaged EVO pressure in the given cycle, $P_{4-ave}(n)$, a similar TDC pressure in successive cycles by adjusting the ignition timing would be obtained, and thereby reduce the combustion fluctuation. Hence, Figure 7 shows the correlation between $P_{TDC-ave}(n+1)$ and $P_{4-ave}(n)$, where correlation coefficient was evaluated to be -0.88 . Since this relation had the strong negative correlation, the empirical formula was expressed with the following equation:

$$P_{TDC-ave}(n+1) = -33.8P_{4-ave}(n) + 10.8. \quad (1)$$

As shown in Figure 7, the above parameters were evaluated using the cycle-averaged values. This was attributed to decrease the stochastic variations of the combustion fluctuation, which causes increase in the estimation accuracy of Eq. (1). Figure 8 shows the correlation coefficient between the experimental data and the estimated values for the TDC pressure, which clearly indicates that the estimation accuracy was substantially increased by averaging over more than 5 cycles. In this section, the following reduction method of the combustion fluctuation was developed by controlling the ignition timing in the next cycle with the averaged data from the preceding 5-cycles (including the given cycle).

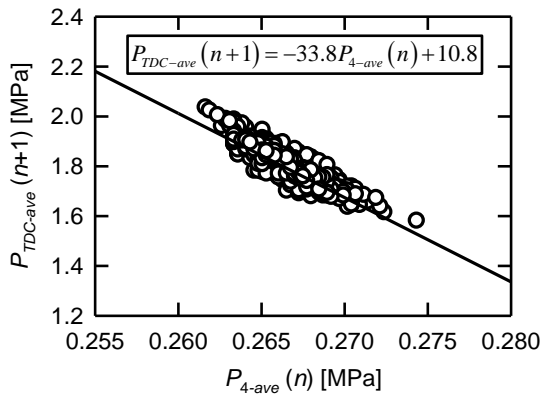


Figure 7. Relationship between cycle-averaged TDC pressure and cycle-averaged EVO pressure under condition 1 at A/F of 17.0

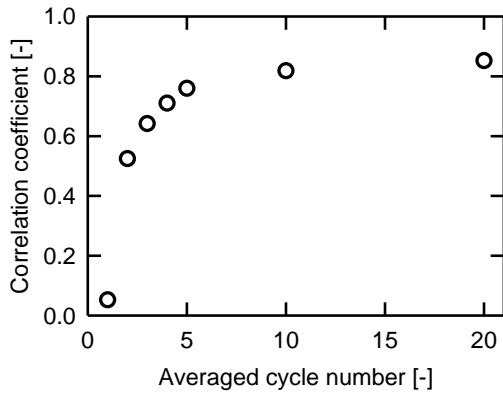


Figure 8. Relationship among correlation coefficient and averaged cycle number

The approach for the prediction of the ignition timing in next cycle to achieve a constant TDC pressure was essentially as follows: The previous studies noted that the variations in the TDC pressure or the maximum in-cylinder pressure were induced by the change in the combustion initiation position during each cycle. Thus, the present study examined the correlation between the TDC pressure, $P_{TDC-ave}(n+1)$, and the combustion initiation position, $\theta_{10}(n+1)$, (defined as the crank angle at 10th part of the maximum rate of heat generation in the present study), as shown in Figure 9. The empirical

formula for this correlation was derived with the following equation:

$$\theta_{10}(n+1) = -30.0P_{TDC}(n+1) + 376. \quad (2)$$

This equation could then be applied to estimate the combustion initiation position of the TDC pressure calculated from Eq. (1). Figure 10 shows the correlation between $\theta_{10}(n+1)$ and the ignition timing, $\theta_{ig}(n+1)$ (defined as the spark advance from TDC), and the empirical equation was represented as:

$$\theta_{ig}(n+1) = -1.58\theta_{10}(n+1) + 585. \quad (3)$$

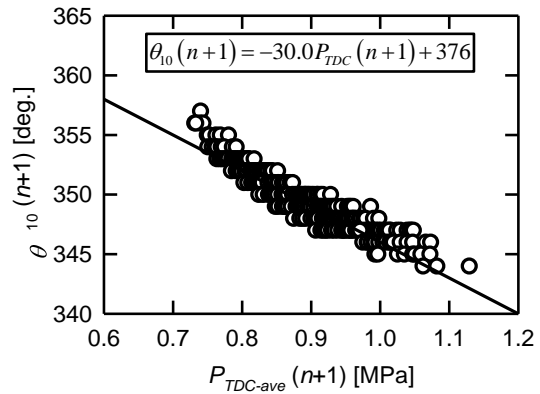


Figure 9. Relationship among the 10th part of crank angle with ultimate rate of heat generation and cycle-averaged TDC pressure with condition 1 at A/F of 17.0

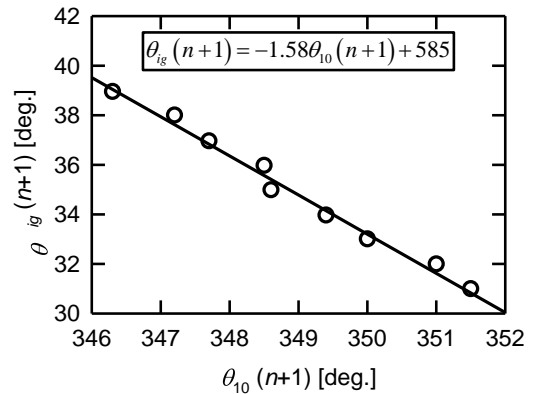


Figure 10. Relationship among ignition timing before TDC and the 10th part of crank angle with ultimate rate of heat generation with condition 1 at A/F of 17.0

This equation indicated that the ignition timing of 1.58 °CA could be advanced or retarded by changing the combustion initiation position of 1 °CA. In order to provide the constant estimated combustion initiation position for the next cycle, the ignition timing correction angle, $\Delta\theta_{SA}(n+1)$, was introduced by the following equation:

$$\Delta\theta_{SA}(n+1) = -1.58(\theta_{10}(n+1) - \theta_{set}), \quad (4)$$

where θ_{set} [°CA] was the target crank angle of the combustion initiation position. Figure 11 shows the

schematic diagram of the ignition timing correction technique for the reduction of the combustion fluctuation, which procedure was essentially as follows:

- (1) The 5-cycle-averaged EVO pressure, $P_{4-ave}(n)$, was measured by using the pressure sensor, and the 5-cycle-averaged TDC pressure in the next cycle, $P_{TDC-ave}(n+1)$ was estimated by applying $P_{4-ave}(n)$ to Eq. (1).
- (2) Since the variation in the TDC pressure was caused by a change in the combustion initiation position during each cycle, the combustion initiation position in the next cycle, $\theta_{i0}(n+1)$, was estimated by applying $P_{TDC-ave}(n+1)$ to Eq. (2).
- (3) The ignition timing was corrected by applying Eq. (4) to $\theta_{i0}(n+1)$, which causes to keep the TDC pressure constant and reduce the combustion fluctuation.

Additionally, the robust performance of the developed ignition timing correction technique was discussed in Section 4. The target values in Sections 4.1 and 4.2 were set at the combustion initiation position represented as the averaged TDC pressure in the preceding 5 cycles (hereinafter referred to as average correction technique) and that as the maximum TDC pressure in the preceding 5 cycles (hereinafter referred to as maximum correction technique).

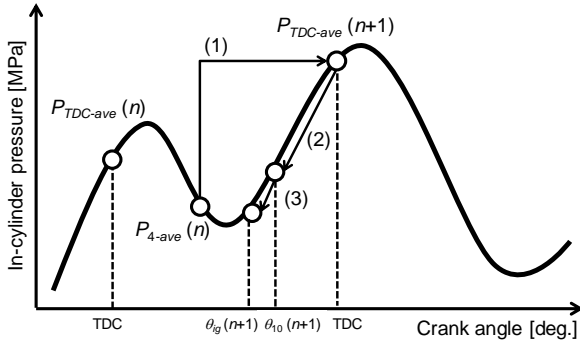


Figure 11. Review of developed method to decrease combustion oscillation by estimating TDC pressure and controlling ignition timing

4. Results and Discussion

4.1. Combustion Fluctuation Reduction by Average Correction Technique

The experiments were performed under the condition 3 by controlling the ignition timing in the next cycle with the average correction technique. Table 4 summarizes the average values, the standard deviations, the fluctuation ratios (well-defined as the standard deviation divided by the average value) and the rate of reduction (defined as the percentage change from the fluctuation ratio of condition 2 to the fluctuation ratio of condition 3) of the IMEP, P_{IMEP} , the maximum in-cylinder pressure, P_{max} , and the TDC pressure, P_{TDC} , under the conditions 2 and 3. Based on the fluctuation ratios in the IMEP and the maximum in-cylinder pressure, their ratios under the condition 3

were smaller than those under the condition 2, and thus, the average correction technique resulted in decreasing the fluctuation of the IMEP and the maximum in-cylinder pressure slightly, compared with the condition without the correction technique, which was identified as reducing the combustion fluctuation. However, Table 4 exhibits that only the fluctuation ratio in the TDC pressure was increased by using the average correction technique, and this was attributed to the ignition timing correction in the retard direction.

Table 4. Average value, standard deviation, fluctuation ratio and rate of reduction of (a) IMEP, (b) maximum in-cylinder pressure, and (c) TDC pressure under conditions 2 and 3 with control by using average correction technique

(a) IMEP, P_{IMEP}

	Average [kPa]	Standard deviation [kPa]	Fluctuation ratio [%]	Rate of reduction [%]
Condition 2	316	5.03	1.59	–
Condition 3	320	3.93	1.23	22.7

(b) Ultimate in-cylinder pressure, P_{max}

	Average [MPa]	Standard deviation [MPa]	Fluctuation ratio [%]	Rate of reduction [%]
Condition 2	2.45	0.20	8.24	–
Condition 3	2.70	0.19	6.93	15.9

(c) TDC pressure, P_{TDC}

	Average [MPa]	Standard deviation [MPa]	Fluctuation ratio [%]	Rate of reduction [%]
Condition 2	1.80	0.15	8.55	–
Condition 3	2.05	0.19	9.15	–7.07

In a typical example, the maximum and minimum ignition timing correction angles, $\Delta\theta_{SA}$, were $+3.8^\circ\text{CA}$ and -5.7°CA , and it continued to alternate between the advance and retard directions in approximately every 10 cycles. This ignition timing correction in the retard direction was caused by condition as follows: When examining the measured pressure data, approximately 10% of the TDC pressures showed extremely low values due to the stochastic variations of the combustion fluctuation. Since the target value was set at the average of the TDC pressure in the preceding 5 cycles, the use of the extremely low pressure data generated the lower target value. Afterward, the ignition timing was corrected in the retard direction. This fact indicates that the TDC pressure was hardly changed although the maximum in-cylinder pressure was fluctuated, because the combustion initiation position was also retarded and the pressure at approximately 350°CA in Figure 2 was measured as the TDC pressure. For the above case, since there was the weak correlation between the maximum in-cylinder pressure and the TDC pressure, the reduction method with the average correction technique could not be applied to this case. Therefore, the lack of a limit on the ignition timing correction angle ($\Delta\theta_{SA}(n+1)$) led to the significant

correction of the ignition timing in the retard direction and to an increase in the fluctuation ratio in the TDC pressure. Based on the above facts, we considered that the effect of the extremely low TDC pressure could be decreased by using the maximum TDC pressure in the preceding 5 cycles as the target value, and the results using the maximum correction technique are discussed in Section 4.2.

4.2. Combustion Fluctuation Reduction by Maximum Correction Technique

The experiments were performed under the condition 3 by controlling the ignition timing in the next cycle with the maximum correction technique. Table 5 summarizes the average values, the standard deviations, the fluctuation ratios and the rate of reduction of the IMEP, P_{IMEP} , the maximum in-cylinder pressure, P_{max} , and the TDC pressure, P_{TDC} , under the conditions 2 and 3. Since the target value was set at the maximum TDC pressure in the preceding 5 cycles, it was suggested that the control of the ignition timing gives rise to all the pressures listed in Table 5 and decrease their standard deviations. Under the present experimental conditions, the maximum and the minimum ignition timing correction angles, $\Delta\theta_{SA}(n+1)$, were $+3.8$ °CA and ± 0.0 °CA, respectively, which means that there was no correction of ignition timing in the retard direction. With the maximum correction technique, the fluctuation ratios of all three parameters were evaluated to be 0.60%, 4.02% and 5.26%, respectively, which was greater reduction in the combustion fluctuation than the results without the correction technique (1.59%, 8.24% and 8.55%) and those with the average correction technique (1.23%, 6.93% and 9.15%).

Table 5. Standard deviation, rate of reduction, average value, and fluctuation ratio of (a) IMEP, (b) ultimate in-cylinder pressure, and (c) TDC pressure under conditions 2 and 3 using control by utilizing ultimate correction technique

(a) IMEP, P_{IMEP}				
	Average [kPa]	Standard deviation [kPa]	Fluctuation ratio [%]	Rate of reduction [%]
Condition 2	316	5.03	1.59	–
Condition 3	321	1.93	0.60	62.1

(b) Ultimate in-cylinder pressure, P_{max}				
	Average [MPa]	Standard deviation [MPa]	Fluctuation ratio [%]	Rate of reduction [%]
Condition 2	2.45	0.20	8.24	–
Condition 3	2.70	0.11	4.02	51.2

(c) TDC pressure, P_{TDC}				
	Average [MPa]	Standard deviation [MPa]	Fluctuation ratio [%]	Rate of reduction [%]
Condition 2	1.80	0.15	8.55	–
Condition 3	2.05	0.11	5.26	38.5

Figure 12 plots the distributions of probability density functions of the absolute difference values from the average IMEP, ΔP_{IMEP} , the averaged maximum in-cylinder pressure, ΔP_{max} , and the average TDC pressure, ΔP_{TDC} . For examining the ability of the average correction technique and the maximum correction technique, Figure 12 also shows the results obtained without the ignition timing control (under the condition 2 when using the standard ignition timing of 35 °CA before TDC). The term of ΔP_{IMEP} in Figure 12 represents the absolute difference values between the measured P_{IMEP} and the average P_{IMEP} , and the other two parameters were also evaluated here.

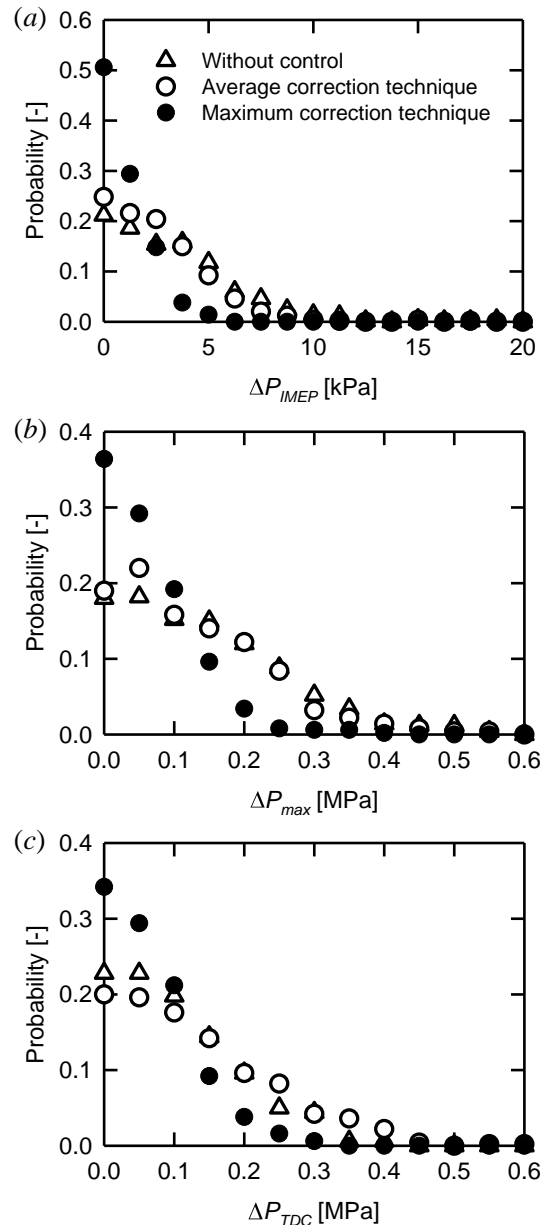


Figure 12. Distribution of probability density with function of absolute value of difference for (a) IMEP, (b) ultimate in-cylinder pressure, and (c) TDC pressure under condition 2 absence of control and condition 3 using control by utilizing both average correction technique and ultimate correction technique

The results shown in Figure 12 clearly indicated that the probabilities of ΔP_{IMEP} , ΔP_{max} and ΔP_{TDC} close to zero (thus, close to each average value) were increased by using the maximum correction technique, compared with the results using the average correction technique. This fact reveals that the fluctuation ratios of all three parameters were reduced, and thus, it was confirmed that the present developed method with the maximum correction technique had the advantage to reduce the combustion fluctuation.

5. Conclusions

For the reduction of the combustion fluctuation, this study suggested the approach to predict the TDC pressure in the next cycle and developed two types of methods to maintain a constant TDC pressure by controlling the ignition timing.

The ignition timing control by the average correction technique was found to reduce the fluctuation ratios of the IMEP and the maximum in-cylinder pressure by 22.7% and 15.9%, respectively. On the other hand, the fluctuation ratio of the TDC pressure was increased by 7.07%.

The ignition timing control by the maximum correction technique was found to reduce the fluctuation ratios of the IMEP, the maximum in-cylinder pressure, and the TDC pressure by 62.1%, 51.2%, and 38.5%, respectively. This result showed the effectiveness of this reduction method.

References

1. Suzuki, K., Miyazaki, T., Nemoto, M. and Machida, K., Optimum Control of Spark Ignition Timing in a Gasoline Engine Using Model Based Methodology, *Proc. of 2005 JSAE Autumn Convention*, 2005, Paper No. 20055773.
2. Xiao, B., Wang, S., and Prucka, R., A Semi-Physical Artificial Neural Network for Feed Forward Ignition Timing Control of Multi-Fuel SI Engines, *SAE 2013 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2013, SAE Technical Paper 2013-01-0324, doi: 10.4271/2013-01-0324.
3. Zhao, Y., Shen, T., and Jiao, X., Air-Fuel Ratio Transient Control Design for Gasoline Engines Based on Individual Cylinder Air Charge Estimation, *17th Asia Pacific Automotive Engineering Conference*, Bangkok (Thailand), Apr. 2013, SAE Technical Paper 2013-01-0102, doi: 10.4271/2013-01-0102.
4. Takiyama, T., Investigation on the Highly Precise Air Fuel Ratio Adaptive Control in Transient States under Changes in the Intake Valve Opening Timing, *SAE 2014 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2014, SAE Technical Paper 2014-01-1162, doi: 10.4271/2014-01-1162.
5. Ingesson, G., Yin, L., Johansson, R., and Tunestal, P., Simultaneous Control of Combustion Timing and Ignition Delay in Multi-Cylinder Partially Premixed Combustion, *SAE International Journal of Engines*, 8(5), Nov. 2015, pp. 2089–2098, doi: 10.4271/2015-24-2424.
6. Ranga, A., Surnilla, G., Thomas, J., Sanborn, E. and Linenberg, M., Adaptive Algorithm for Engine Air – Fuel Ratio Control with Dual Fuel Injection Systems, *SAE 2017 World Congress Experience (WCX)*, Detroit (MI, USA), Apr. 2017, SAE Technical Paper 2017-01-0588, doi: 10.4271/2017-01-0588.
7. Simmons, T.C. and Markoski, L.J., Innovative Carburetor Design with Dynamic Air to Fuel Ratio (AFR) Control for Improved Fuel Economy and Reduced Emissions, *JSAE/SAE 23rd Small Engine Technologies Conference (SETC)*, Jakarta (Indonesia), Nov. 2017, SAE Technical Paper 2017-32-0003.
8. Suzuki, T. and Ichiyanagi, M., Robust Control Design for Air-Fuel Ratio Fluctuation of Gasoline Engine (1st Report: Development of Feed-Forward Controller with Heat Transfer Model at Intake), *Journal of Japan Society for Design Engineering*, 53(5), 2018, pp. 377–390, doi: 10.14953/jjsde.2017.2757.
9. Suzuki, T. and Ichiyanagi, M., Robust Control Design for Air-Fuel Ratio Fluctuation of Gasoline Engine (2nd Report: Application of Feed-Forward Controller with Heat Transfer Model at Intake to Multiple Cylinder Engine), *Journal of Japan Society for Design Engineering*, 53(5), 2018, pp. 391–400, doi: 10.14953/jjsde.2017.2758.
10. Vance, J.B., Kaul, B.C., Jagannathan, S., and Drallmeier, J.A., Output Feedback Controller for Operation of Spark Ignition Engines at Lean Conditions Using Neural Networks, *IEEE Transactions on Control Systems Technology*, 16(2), Mar. 2008, pp. 214–228, doi: 10.1109/TCST.2007.903368.
11. Inoue, T., Matsushita, S., Nakanishi, K., and Okano, H., Toyota Lean Combustion System – The Third Generation System, *SAE 1993 International Congress & Exposition*, Detroit (MI, USA), Mar. 1993, SAE Technical Paper 930873, doi: 10.4271/930873.
12. Obermair, H., Scarcelli, R., and Wallner, T., Efficiency Improved Combustion System for Hydrogen Direct Injection Operation, *SAE 2010 Powertrains Fuels & Lubricants Meeting*, San Diego (CA, USA), Oct. 2010, SAE Technical Paper 2010-01-2170, doi: 10.4271/2010-01-2170.
13. Scarcelli, R., Matthias, N., and Wallner, T., Numerical Investigation of Combustion in a Lean Burn Gasoline Engine, *11th International Conference on Engines & Vehicles (ICE)*, Napoli (Italy), Sep. 2013, SAE Technical Paper 2013-24-0029, doi: 10.4271/2013-24-0029.
14. Takahashi, D., Nakata, K., Yoshihara, Y., Ohta, Y., and Nishiura, H., Combustion Development to Achieve Engine Thermal Efficiency of 40% for Hybrid Vehicles, *SAE 2015 World Congress &*

- Exhibition*, Detroit (MI, USA), Apr. 2015, SAE Technical Paper 2015-01-1254, doi: 10.4271/2015-01-1254.
15. Lehrheuer, B., Pischinger, S., Wick, M., Andert, J., Berneck, D., Ritter, D., Albin, T., and Thewes, M., A Study on In-Cycle Combustion Control for Gasoline Controlled Autoignition, *SAE 2016 World Congress & Exhibition*, Detroit (MI, USA), SAE Technical Paper 2016-01-0754, doi: 10.4271/2016-01-0754.
 16. Takahashi, D., Nakata, K., Yoshihara, Y., and Omura, T., Combustion Development to Realize High Thermal Efficiency Engines, *SAE International Journal of Engines*, 9(3), 2016, pp. 1486–1493, doi: 10.4271/2016-01-0693.
 17. Kurino, S., *Internal Combustion Engine Engineering*, Sankaido Publishing, 1989.
 18. Gomi, T., *Automotive Engineering: Vol. 4 Gasoline Engine*, Sankaido Publishing, 1980.
 19. Heywood, J., *Internal Combustion Engine Fundamentals*, McGraw-Hill Education, 1988.
 20. Ravaglioli, V., Ponti, F., De Cesare, M., Stola, F., Carra, F., and Corti, E., Combustion Indexes for Innovative Combustion Control, *SAE International Journal of Engines*, 10(5), 2017, pp. 2371–2381, doi: 10.4271/2017-24-0079.
 21. Nishida, K., Kaneko, T., Takahashi, Y., and Aoki, K., Estimation of Indicated Mean Effective Pressure Using Crankshaft Angular Velocity Variation, *JSAE/SAE 17th Small Engine Technologies Conference (SETC)*, Sapporo (Japan), Nov. 2011, SAE Technical Paper 2011-11-08, doi: 10.4271/2011-32-0510.
 22. Anderson, D., Callies, J., Xiao, B., and Prucka, R., In-Cylinder Thermodynamic Analysis for Performance Engine Development, *SAE 2012 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2012, SAE Technical Paper 2012-01-1170, doi: 10.4271/2012-01-1170.
 23. Yang, Z., Steffen, T., Stobart, R., and Winward, E., A Predictive Model of P_{max} and IMEP for Intra-Cycle Control, *SAE 2014 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2014, SAE Technical Paper 2014-01-1344, doi: 10.4271/2014-01-1344.
 24. Ding, S., Yang, L., Song, E., and Ma, X., Investigations on In-Cylinder Pressure Cycle-to-Cycle Variations in a Diesel Engine by Recurrence Analysis, *SAE 2015 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2015, SAE Technical Paper 2015-01-0875, doi: 10.4271/2015-01-0875.
 25. Jung, D. and Iida, N., An Investigation into Cycle-to-Cycle Variations of IMEP using External EGR and Rebreathed EGR in an HCCI Engine, Based on Experimental and Single-Zone Modeling, *JSAE/SAE 2015 International Powertrains, Fuels & Lubricants Meeting*, Kyoto (Japan), Sep. 2015, SAE Technical Paper 2015-01-1805, doi: 10.4271/2015-01-1805.
 26. Shayestehmanesh, S., Peyton Jones, J., and Frey, J., Stochastic Characteristics of Knock and IMEP, *SAE 2018 World Congress Experience (WCX)*, Detroit (MI, USA), Apr. 2018, SAE Technical Paper 2018-01-1155, doi: 10.4271/2018-01-1155.
 27. Takeuchi, M., Tsukada, K., Nonomura, Y., Omura, Y. and Chujou, Y., A Combustion Pressure Sensor Utilizing Silicon Piezoresistive Effect, *SAE 1993 International Congress & Exposition*, Detroit (MI, USA), Mar. 1993, SAE Technical Paper 930351, doi: 10.4271/930351.
 28. Sugitani, N., Ueda, M., Kosugi, M. and Tsukada, K., Combustion Pressure Sensor for Toyota Lean Burn Engine Control, *SAE 1993 International Congress & Exposition*, Detroit (MI, USA), Mar. 1993, SAE Technical Paper 930882, doi: 10.4271/930882.
 29. Herden, W. and Küssel, M., A New Combustion Pressure Sensor for Advanced Engine Management, *SAE 1994 International Congress & Exposition*, Detroit (MI, USA), Mar. 1994, SAE Technical Paper 940379, doi: 10.4271/940379.
 30. Maass, B., Deng, J., and Stobart, R., In-Cylinder Pressure Modelling with Artificial Neural Networks, *SAE 2011 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2011, SAE Technical Paper 2011-01-1417, doi: 10.4271/2011-01-1417.
 31. Yu, S., Song, H., Min, K., Choi, H., Cho, S., and Han, K., Development of Engine Control Using the In-Cylinder Pressure Signal in a High Speed Direct Injection Diesel Engine, *SAE 2011 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2011, SAE Technical Paper 2011-01-1418, doi: 10.4271/2011-01-1418.
 32. Huang, Y., Yang, F., Ouyang, M., Chen, L., and Yang, X., Optimal Feedback Control with In-Cylinder Pressure Sensor under Engine Start Conditions, *SAE 2011 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2011, SAE Technical Paper 2011-01-1422, doi: 10.4271/2011-01-1422.
 33. Yu, S., Han, K., Nam, K., Choi, D., and Yu, J., Development of Real-Time Engine Control Using the In-Cylinder Pressure Signal in a Diesel Engine for Passenger Vehicle, *SAE/KSAE 2013 International Powertrains, Fuels & Lubricants Meeting*, Seoul (South Korea), Oct. 2013, SAE Technical Paper 2013-01-2513, doi: 10.4271/2013-01-2513.
 34. Min, K., Chung, J., Kang, E., and Sunwoo, M., Individual Cylinder IMEP Estimation Using a Single Cylinder Pressure Sensor for Light-Duty Diesel Engines, *SAE 2014 World Congress & Exhibition*, Detroit (MI, USA), Apr. 2014, SAE Technical Paper 2014-01-1347, doi: 10.4271/2014-01-1347.
 35. Kulah, S., Donkers, T., and Willems, F., Virtual Cylinder Pressure Sensor for Transient Operation in Heavy-Duty Engines, *SAE International Journal of Engines*, 8(3), 2015, pp. 1029–1040, doi: 10.4271/2015-01-0872.

36. Ura, Y. and Oya, K., Pressure Sensor Module for High Temperature, High Pressure, and Quick Response, *SAE 2018 World Congress Experience (WCX)*, Detroit (MI, USA), Apr. 2018, SAE Technical Paper 2018-01-0759, doi: 10.4271/2018-01-0759.
37. Gomi, T., Thermal Effect upon Air Capacity of the Four-Stroke Engine (1st Report, Thermodynamical Analysis Method), *Transactions of the Japan Society of Mechanical Engineers Series B*, 12(53), 1969, pp. 1163–1179, doi: 10.1299/jsme1958.12.1163.
38. Gomi, T., Thermal Effect upon Air Capacity of the Four-Stroke Engine (2nd Report, Results of Experimental Analysis), *Transactions of the Japan Society of Mechanical Engineers Series B*, 12(53), 1969, pp. 1180–1203, doi: 10.1299/jsme1958.12.1180.
39. Yazdani, A., Naber, J., Shahbakhti, M., Dice, P., Glugla, C., Cooper, S., McEwan, D. and Huberts, G. Air Charge and Residual Gas Fraction Estimation for a Spark-Ignition Engine Using In-Cylinder Pressure, *SAE 2017 World Congress Experience (WCX)*, Detroit (MI, USA), Apr. 2017, SAE Technical Paper 2017-01-0527, doi: 10.4271/2017-01-0527.
40. Arsie, I., Di Leo, R., Pianese, C., and De Cesare, M., Air-Fuel Ratio and Trapped Mass Estimation in Diesel Engines Using In-Cylinder Pressure, *SAE 2017 World Congress Experience (WCX)*, Detroit (MI, USA), Apr. 2017, SAE Technical Paper 2017-01-0593, doi: 10.4271/2017-01-0593.