

Earth Science

Volume 4, 2013

# E3S Web of Conferences

## Proceedings



# E3S Web of Conferences

## Volume 130 (2019)

The 1<sup>st</sup> International Conference on Automotive, Manufacturing, and Mechanical Engineering  
(IC-AMME 2018)

Kuta, Bali, Indonesia, September 26-28, 2018

R.H. Setyobudi, F.D. Suprianto, M. Mel, O. Anne, P. Soni, T. Turkadze, Y. Jani and Z. Vincēviča-Gaile (Eds.)

Export the citation of the selected articles [Export](#)

[Select all](#)

Open Access

### About the conference

Published online: 15 November 2019

- [PDF \(1.92 MB\)](#)

Open Access

### Statement of Peer review

Published online: 15 November 2019

- [PDF \(232 KB\)](#)



Open Access

### [Simulation-based Prediction of Structural Design Failure in Fishing Deck Machinery a Hydraulic Type with Finite Element Method](#) 01001

Agri Suwandi, Dede Lia Zariatn, Bambang Sulaksono, Estu Prayogi and I Made Widana

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001001>

- [PDF \(599.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## Effect of Frequency on Droplet Characteristics in Ultrasonic Atomization Process 01002

Amelia Sugondo, Sutrisno, Willyanto Anggono and Olga Anne

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001002>

- [PDF \(413.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## Sound Absorption Performance of Sugar Palm Trunk Fibers 01003

Anditya Endar Prabowo, Kuncoro Diharjo, Ubaidillah and Iwan Prasetyo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001003>

- [PDF \(645.0 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## Characteristics Of Aluminium ADC 12/SiC Composite with the Addition of TiB and Sr Modifier 01004

Astari Indarsari, Anne Zulfia Syahrial and Budi Wahyu Utomo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001004>

- [PDF \(677.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Optimizing The Addition of TiB to Improve Mechanical Properties of the ADC 12/SiC Composite Through Stir Casting Process](#) 01005

Cindy Retno Putri, Anne Zulfia Syahrial, Salahuddin Yunus and Budi Wahyu Utomo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001005>

- [PDF \(585.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Drivers and Barriers of Mobile Phone Remanufacturing Business in Indonesia: Perspectives of Retailers](#) 01006

Didik Wahjudi, Shu-san Gan, Yopi Yusuf Tanoto, Jerry Winata and Benny Tjahjono

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001006>

- [PDF \(379.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Experimental Analysis on Solid Desiccant Used in An Air Conditioning](#) 01007

Ekadewi Anggraini Handoyo, Andriono Slamet and Muhammad Danang Birowosuto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001007>

- [PDF \(605.5 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## Influences of Groove Angles and Filler Metals on 304L Stainless Steel to AISI 1040 Carbon Steel Dissimilar Joint by Gas Tungsten Arc Welding 01008

Eriek Wahyu Restu Widodo, Vuri Ayu Setyowati, Suheni and Ahmad Rilo Hardianto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001008>

- [PDF \(839.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## The Effect of Biodiesel Blends Made from Carica papaya L. Seeds on the Performance of Diesel Engine 01009

Fandi Dwiputra Suprianto, Willyanto Anggono, Teng Sutrisno, Daniel William Gunawan and Gabriel Jeremy Gotama

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001009>

- [PDF \(990.1 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## Container Ship Accident Analysis due to Container Stacked on Deck as an Attempt to Improve Maritime Logistic System 01010

Gafero Priapalla Rahim and Sunaryo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001010>

- [PDF \(474.4 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Automatic Petrol and Diesel Engine Sound Identification Based on Machine Learning Approaches](#) 01011

Halim Frederick, Astuti Winda and Mahmud Iwan Solihin

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001011>

- [PDF \(588.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Optimization of Soft Body Armor with Laminates of Carbon–aramid Fiber and Polyester Fiber Using the Taguchi Method](#) 01012

Hari Purnomo, Wahyu Ismail Kurnia, Farham Haji Muhammad Saleh and Alex Kisanjani

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001012>

- [PDF \(565.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Hybrid Turbulence Models: Recent Progresses and Further Researches](#) 01013

Hariyo Priambudi Setyo Pratomo, Fandi Dwiputra Suprianto and Teng Sutrisno

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001013>

- [PDF \(537.1 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Preliminary Study on Mesh Stiffness Models for Fluid-structure Interaction Problems](#) 01014

Hariyo Priambudi Setyo Pratomo, Fandi Dwiputra Suprianto and Teng Sutrisno

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001014>

- [PDF \(828.8 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Development of Real Time Machine Tools Component Utilization Data Acquisition for developing Dynamic Model of Maintenance Scheduling](#) 01015

Herman Budi Harja, Tri Prakosa, Yatna Yuwana Martawirya, Indra Nurhadi and Andrian Sagisky Januartha

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001015>

- [PDF \(456.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Probabilistic Evaluation of Fatigue Crack Growth Rate for Longitudinal Tungsten Inert Gas Welded Al 6013-T4 Under Various PostWeld Heat Treatment Conditions](#) 01016

I Made Wicaksana Ekaputra, Gunawan Dwi Haryadi, Stefan Mardikus and Rando Tungga Dewa

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001016>

- [PDF \(515.6 KB\)](#)

- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Experimental Performance Analysis of Shallow Spiral-tube Ground Heat Exchangers in Series and Parallel Configurations](#) 01017

Jalaluddin, Akio Miyara, Rustan Tarakka and Muhammad Anis Ilahi Ramadhani

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001017>

- [PDF \(848.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Structural Evaluation on Sugarcane Bagasse Treated Using Sodium and Calcium Hydroxide](#) 01018

Juliana Anggono, Hariyati

Purwaningsih, Suwandi Sugondo, Steven Henrico, Sanjaya Sewucipto and Jay Patel

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001018>

- [PDF \(1.559 MB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [The Influence of Room and Ambient Temperatures of Exergy Loss in Air Conditioning Using Ejector as an Expansion Device with R290 as Working Fluid](#) 01019

Kasni Sumeru, Pratikto Pratikto, Andriyanto Setyawan and Adenkule Moshood Abioye

Published online: 15 November 2019



DOI: <https://doi.org/10.1051/e3sconf/201913001019>

- [PDF \(440.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Automotive Start-Stop Engine Based on Face Recognition System](#) 01020

Lim William, Astuti Winda, Dewanto Satrio, Tan Sofyan and Mahmud Iwan Solihin

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001020>

- [PDF \(1003 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [The Effect of Coconut Shell Powder as Functional Filler in Polypropylene during Compounding and Subsequent Molding](#) 01021

Matt Kirby, Benjamin Lewis, Benjamin Peterson, Juliana Anggono and Walter Bradley

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001021>

- [PDF \(623.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Automotive Start–Stop Engine Based on Fingerprint Recognition System](#) 01022

Pranoko Rivandi, Astuti Winda, Dewanto Satrio and Mahmud Iwan Solihin

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001022>

- [PDF \(459.6 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Effect of T6 on Mechanical Properties of TiB and Sr Modified ADC12/SiC Composite Produced by Stir Casting](#) 01023

Pritamara Wahyuningtyas, Anne Zulfia Syahrial, Wahyuaji Narottama Putra and Budi Wahyu Utomo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001023>

- [PDF \(869.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Regression Equations to Determine the Stages of Electric Current in Electrical Discharge Machining \(EDM\) According to the Level of Desired Surface Roughness with Shortest Processing Time](#) 01024

Roche Alimin, Didik Wahjudi, Hariyanto Gunawan and Prayogo Putra Poernomo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001024>

- [PDF \(597.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## Increasing Port Performance through Port Navigation Safety Assessment using the Formal Safety Assessment Method (Case Study Port of Tanjung Priok - Indonesia) 01025

Sahlan Ridwan and Sunaryo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001025>

- [PDF \(354.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## A Feasibility Study of Mobile Phone Casings Remanufacturing 01026

Shu-San Gan, Juliana Anggono, Didik Wahjudi, Yopi Tanoto, Randy and Novana Hutasoit

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001026>

- [PDF \(540.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## 3D Simulative Investigation of Heat Transfer Enhancement Using Three Vortex Generator Types Surrounding Tube in Plate Fin Heat Exchanger 01027

Stefan Mardikus, Petrus Setyo Prabowo, Vinsensius Tiara Putra, Made Wicaksana Ekaputra and Juris Burlakovs

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001027>

- [PDF \(770.6 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Investigation on the Sandwich System Hull Materials for Solar Powered Electrical Sport Boat](#) 01028

Sunaryo and Aldy Syahrihaddin Hanifa

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001028>

- [PDF \(589.6 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Electrical System Design of Solar-Powered Electrical Water Recreational and Sport Vessel](#) 01029

Sunaryo and Pradhana Shadu Imfianto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001029>

- [PDF \(674.8 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Experimental Investigation of Avocado Seed Oil Utilization in Diesel Engine Performance](#) 01030

Sutrisno, Willyanto Anggono, Fandi Dwiputra Suprianto, Cokro Daniel Santosa, Michael Suryajaya and Gabriel Jeremy Gotama

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001030>

- [PDF \(517.8 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Optimization of Boring Process Parameters in Manufacturing of Polyacetal Bushing using High Speed Steel](#) 01031

The Jaya Suteja, Yon Haryono, Andri Harianto and Esti Rinawiyanti

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001031>

- [PDF \(379.0 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Development of Total Hip Joint Replacement Prostheses Made by Local Material: An Introduction](#) 01032

Tresna Priyana Soemardi, Agri Suwandi, Cholid Badri, Anwar Soefi Ibrahim, Sastra Kusuma Wijaya and Januar Parlaungan Siregar

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001032>

- [PDF \(549.9 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Strategy to Improve Recycling Yield of Aluminium Cans](#) 01033

Victor Yuardi Risonarta, Juliana Anggono, Yosias Michael Suhendra, Setyo Nugrowibowo and Yahya Jani

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001033>

- [PDF \(317.9 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Using Agricultural Waste to Create More Environmentally Friendly and Affordable Products and Help Poor Coconut Farmers](#) 01034

Walter L. Bradley and Sean Conroy

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001034>

- [PDF \(783.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Intelligent Automatic V6 and V8 Engine Sound Detection Based on Artificial Neural Network](#) 01035

Wenny Vincent, Astuti Winda and Mahmud Iwan Solihin

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001035>

- [PDF \(585.9 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Effect of Various Supercharger Boost Pressure to in-Cylinder Pressure and Heat Release Rate Characteristics of Direct Injection Diesel Engine at Various Engine Rotation](#) 01036

Willyanto Anggono, Wataru Ikoma, Haoyu Chen, Zhiyuan Liu, Mitsuhsa Ichiyanagi and Takashi Suzuki

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001036>

- [PDF \(791.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Experimental and Numerical Investigation of Laminar Burning Velocities of Artificial Biogas Under Various Pressure and CO<sub>2</sub> Concentration](#) 01037

Willyanto Anggono, Akihiro Hayakawa, Ekenechukwu C. Okafor and Gabriel Jeremy Gotama

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001037>

- [PDF \(560.1 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Kinematic Analysis of Triple Ball Tie-rod in Ackermann Steering and Tilting Mechanism for Tricycle Application](#) 01038

Wimba Pramudita Wid, Aufar Syehan and Danardono Agus Sumarsono

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001038>

- [PDF \(704.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Process Planning Review for Mobile Phone Remanufacturing in Indonesia](#) 01039

Yopi Yusuf Tanoto, Shu-San Gan, Didik Wahjudi, Niko Adrisenna Pontjonoto and Michael Suryajaya

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001039>

- [PDF \(326.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Studies on Water Sorption Behaviour of Laminated Bamboo Polymer Composite](#) 01040

Yuniar Ratna Pratiwi, Indah Widiastuti and Budi Harjanto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001040>

- [PDF \(408.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [The Impact of Enterprise Resources Planning Implementation in Cross-Functional for Sharing Knowledge and Quality Information in Preparing the Financial Statements](#) 01041

Zeplin Jiwa Husada Tarigan, Sautma Ronni Basana and Widjojo Suprpto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001041>

- [PDF \(333.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

## [Effect of Key User Empowerment, Purchasing Strategy, Process Integration, Production System to Operational Performance](#) 01042

Zeplin Jiwa Husada Tarigan, Hotlan Siagian, Sautma Ronni Basana and Ferry Jie

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001042>

- [PDF \(426.6 KB\)](#)
- [References](#)



- [NASA ADS Abstract Service](#)

Scopus preview - Scopus - E3S W

scopus.com/sourceid/21100795900

Author SearchSourcesFeedbackCompare sources

Create accountSign in

Source details

E3S Web of Conferences

Open Access

Scopus coverage years: from 2013 to 2021

Publisher: EDP Sciences

E-ISSN: 2267-1242

Subject area: Earth and Planetary Sciences: General Earth and Planetary SciencesEnergy General EnergyEnvironmental Science: General Environmental Science

Source type: Conference Proceeding

View all documents>Set document alertSave to source listSource Homepage

CiteScore 20210.8

SJR 20210.237

SNIP 20210.364

CiteScoreCiteScore rank & trendScopus content coverage

Improved CiteScore methodology

CiteScore 2021 counts the citations received in 2018-2021 to articles, reviews, conference papers, book chapters and data papers published in 2018-2021, and divides this by the number of publications published in 2018-2021. Learn more>

CiteScore 202119,869 Citations 2018 - 202125,181 Documents 2018 - 20210.8

CiteScoreTracker 202217,582 Citations to date21,482 Documents to date0.8

CiteScore rank 2021

Category	Rank	Percentile
Earth and Planetary Sciences		
General Earth and Planetary Sciences	#142/191	25th
Energy		
General Energy	#54/68	21st
Environmental Science		
General Environmental Science	#183/228	19th

View CiteScore methodology>CiteScore FAQ>Add CiteScore to your site>

Would you help us improve Scopus?

It will take just a few minutes.

Maybe laterShare your thoughts



**IC-AMME**  
INTERNATIONAL CONFERENCE  
ON AUTOMOTIVE, MANUFACTURING,  
AND MECHANICAL ENGINEERING



CONTINUING  
EDUCATION  
CENTRE

# *Certificate*

awarded to

**Juliana Anggono**

for participation as

**Presenter & Participant**

**at 1<sup>st</sup> annual IC-AMME 2018**

International Conference on Automotive,  
Manufacturing, and Mechanical Engineering

**September 26 - 28, 2018**

Holiday Inn Resort Baruna Bali  
Bali - Indonesia



**IC-AMME**

**Dr. Didik Wahjudi, M.Sc., M.Eng.**

# Structural Evaluation on Sugarcane Bagasse Treated Using Sodium and Calcium Hydroxide

Juliana Anggono<sup>1,\*</sup>, Hariyati Purwaningsih<sup>2</sup>, Suwandi Sugondo<sup>1</sup>,  
Steven Henrico<sup>1</sup>, Sanjaya Sewucipto<sup>1</sup>, and Jay Patel<sup>3</sup>

<sup>1</sup>Mechanical Engineering Department, Petra Christian University, Surabaya 60236, Indonesia

<sup>2</sup>Materials and Metallurgical Engineering Department, Sepuluh Nopember Institute of Technology, Surabaya 60111, Indonesia

<sup>3</sup>School for Engineering of Matter, Transport, and Energy – Arizona State University, Tempe, AZ 85287-6106, USA

**Abstract.** Greater interest in recent years to the increase demand in using natural fiber reinforcement of polymers is to comply with the increasing stringent international protocols related to climate change and environmental awareness. Many studies have reported the development of renewable and biodegradable agricultural by-products as reinforcement fibers for biocomposites. One of the essential factors in producing strong biocomposites is the properties prepared from the natural fibers which results from the alkali treatment given. This research aims to evaluate the effect of different treatment duration on structural changes on sugarcane after alkali treatment using sodium hydroxide (NaOH) and calcium hydroxide (Ca(OH)<sub>2</sub>) solutions. Calcium hydroxide was used as comparative solution in search for milder and more environmental friendly alkali solution as an alternative solution of NaOH. Fourier Transform Infrared (FTIR) confirmed the major removal of lignin and minor of hemicellulose. It shows that the structure did not change considerably with the additional treatment time. The weight loss measurement after each treatment shows a higher weight loss with the treatment with NaOH (40.5 % to 57.75 %) than the weight loss after Ca(OH)<sub>2</sub> treatment (25 % to 46 %). Scanning electron microscope (SEM) observed the morphology changes on the fiber from both treatments.

**Keywords:** Alkali solution, alkali treatment, cellulose, mercerization, natural fibers.

## 1 Introduction

Indonesia is a major producer of agricultural products which the sugarcane is one of the main products with a total production of 28.7 t yr<sup>-1</sup> (rank 9<sup>th</sup> in the world) [1]. Agricultural production inevitably generates residues (by-products) that have limited use. Sugarcane stems consist of three major parts: the pith (5 %), fibers (73 %), and the rind (22 %) [2]. Sugarcane bagasse is the remaining substance (waste) after crushing the canes for sugar. Bagasse is a fibrous residue, one among the three other main byproducts of the sugar industry, i.e. cane tops, filter muds, and molasses. Currently sugarcane bagasse is used as primary energy source as fuel for the boilers in the sugar mills and the remaining is stored. However, the important part of the bagasse as an industrial waste is still underutilized. Added-value compounds that can be produced using bagasse are bioethanol [3–6], protein-enriched animal feed ('single cell protein') [7], and enzymes. Therefore various research

---

\* Corresponding author: [julianaa@petra.ac.id](mailto:julianaa@petra.ac.id)

works have been done to develop methods for further processing of bagasse to produce fuel and chemicals that offer economic, environmental, and strategic advantages. However, there were relatively fewer studies reporting on obtaining fibers from sugarcane bagasse compared to other agricultural by-products.

Bagasse, as well as other lignocellulosic materials consist of cellulose, hemicelluloses, lignin, and small amounts of extractives and mineral salts. Several research has studied bagasse as a potential resource as a reinforcement element in biocomposites [8–15]. There are a wide ray of applications in building, construction, and automobiles that exist for the fabrication of bagasse based composites. The use of lignocellulosic materials require treatment step. One of the key concerns working with natural fibers used as reinforcement component is their hydrophilic nature. These fibers, therefore, are inherently incompatible with hydrophobic thermoplastics which thereby influences the mechanical bonding with the matrix. Therefore chemical treatments are considered in modifying the fiber properties. Chemical treatments using acid have been successfully applied to sugarcane bagasse fiber [10, 13, 16]. Acids hydrolyze hemicellulose and produce a liquid phase rich in xylose, with minor amounts of lignin derivatives and it has been successfully applied to sugarcane bagasse [17, 18]. The principle of alkali treatment method is the removal of lignin (major loss) whereas cellulose and a part of the hemicelluloses remain in the solid material (minor loss of hemicellulose). Treatment using alkali solution (mercerization) has been proven to be effective for removal of lignin in the fibers therefore enhanced fiber surface adhesion which allowed an effective stress transfer from matrix to fiber. Relatively fewer studies have investigated the surface modification on lignocellulosic fibers obtained from sugarcane bagasse. The goal of this current work was to investigate the effect of different treatment time on the structural and morphological modification on bagasse fibers treated with sodium hydroxide (NaOH) and lime or calcium hydroxide ( $\text{Ca(OH)}_2$ ). Calcium hydroxide was chosen for other alternative solution due to its less hazardous characteristics and low cost. Modification on morphology and structure of modified bagasse fibers after those treatments were studied to evaluate the delignification degree for bagasse fiber performed by both solutions in different time length of treatment ranging from 2 h to 6 h at temperature of 60 °C to 70 °C. Characterization on the untreated and treated fibers was carried out using Fourier Transform Infrared (FTIR) and X-ray diffractometer (XRD) tests to determine the modified structure and chemical composition of the bagasse fibers. Scanning electron microscope (SEM) was used to study the effectiveness of both treatments on morphology changes of bagasse fibers at different treatment time.

## **2 Materials and methods**

### **2.1 Treatment of bagasse fibers**

The first step in the bagasse preparation was neutralization of the bagasse by soaking in a 70 % ethanol as an effective disinfectant or antiseptic agent for 1 h to eliminate the stench generated due to bacterial fermentation reaction [19]. A ratio of volume of ethanol (L) to the weight of bagasse (kg) used was 2.5:1. The neutralized fibers were drained and dried for 6 h in air at room temperature. The fibers were then dried in the oven (Memmert type UN450) heated from room temperature to 200 °C with a holding time of 30 s. Treatment was applied to the dried fibers by soaking the fibers in two different solutions of 10 % vol. NaOH and 14 % vol.  $\text{Ca(OH)}_2$  at 60 °C to 70 °C for various treatment time of 2 h, 4 h, and 6 h. At the end of treatment, bagasse fibers were rinsed couple of times in distilled water and a pH check was done to ensure they were clean from the alkali solution. Before the rinsed fibers went to the oven for drying, they were dried in air for 6 h at room temperature.

Lastly, those fibers were oven dried by increasing the temperature from room temperature to 200 °C with a holding time of 30 s.

Weight loss measurement on bagasse samples after treatment was carried out aiming to determine the delignification degree of both treatments in different time. The weight loss values obtained could inform the effectiveness of lignin removal during treatment. Bagasse samples were weighed when they were received as wet fibrous residue. Two other weight measurements were performed for oven dried bagasse samples both after neutralization and alkali treatment processes.


## **2.2 Characterisation of bagasse fibers**

Dried fibers were examined with XRD (X'pert PRO tipe PANalytical) and FTIR (Thermo Scientific Nicolet model) to analyse the structural changes on the fiber surface after treatment. SEM (FEI type Inspect S50) was used to evaluate the surface morphology of the fibers before and after the alkali treatment in different treatment time. Untreated bagasse fibers were also evaluated to study the structural changes after both treatments.

## **3. Results and discussion**

### **3.1 Weight loss of sugarcane bagasse after treatments**

The goal of alkali treatment includes the removal of lignin and disruption of the crystalline structure of cellulose. Chemicals used in alkali treatment in this study were sodium and calcium hydroxide. The weight loss obtained after neutralization and oven drying was 42.5 %. Apart from the three basic chemical compounds (lignin, hemicellulose, and cellulose) that lignocellulose consists of, water is also present in the complex. Typically, sugarcane bagasse has a moisture content of between 45 % and 55 % on a wet basis [20]. Furthermore, minor amounts of proteins, minerals and other components can be found in the lignocellulose composition as well. Therefore the weight loss of neutralized fibers was mainly due to the loss of water/moisture content after drying. Following the neutralization step, the dried fibers were treatment using sodium and calcium hydroxide for 2 h, 4 h, and 6 h. After treated and oven dried, the fibers were weighed to calculate a further weight loss. Figure 1 shows the weight loss after both treatments which increases considerably with the addition of treatment time. Significant loss was measured in NaOH treated fibers in the range of 40.5 % to 57.75 %. This weight loss is higher than the loss observed in the fibers treated using  $\text{Ca}(\text{OH})_2$  (25 % to 46 %). This higher loss shows that more efficient lignin removal experienced by bagasse treated in NaOH than in  $\text{Ca}(\text{OH})_2$ . The weight loss due to NaOH treatment increased by 60 % during 2 h treatment time compared with the same duration after  $\text{Ca}(\text{OH})_2$  treatment. When treatment time was increased from 4 h to 6 h, the weight loss during NaOH treatment increased only by 30 % compared with treatment using  $\text{Ca}(\text{OH})_2$ . However the weight loss increment with the additional 2 h treatment time was noted relatively higher in  $\text{Ca}(\text{OH})_2$  solution (10 % to 11 %) than in NaOH (4.5 % to 12.75 %). The action of  $\text{Ca}(\text{OH})_2$  during treatment is slower compared to sodium hydroxide [21].

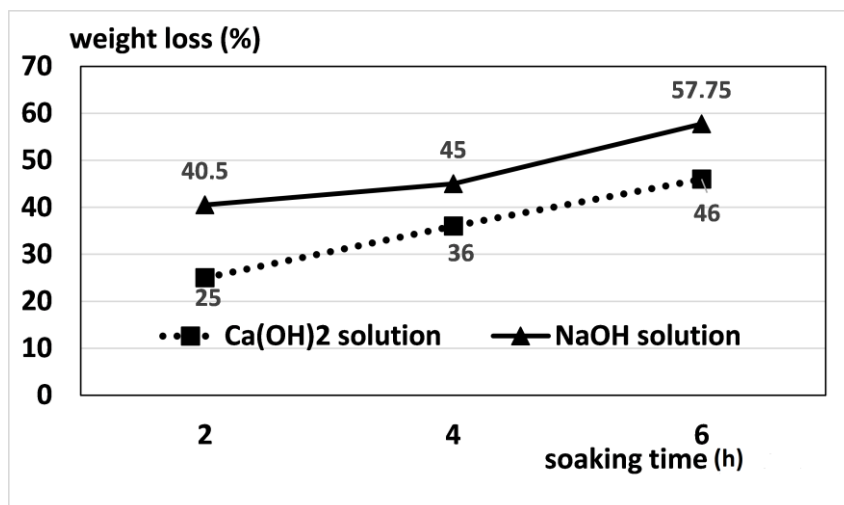

**Fig. 1.** Weight loss of bagasse fibers after treatment.

Overall, major component removed during NaOH and  $\text{Ca}(\text{OH})_2$  treatment was lignin. Hemicellulose removal was contributed as minor loss to the weight loss [21]. FTIR and SEM results support the findings on the weight loss and will be explained in the next section.


### 3.2 Characteristics of modified bagasse

Bagasse is a lignocellulosic material consisting of cellulose 43.8 %, hemicellulose 28.6 %, lignin 23.5 %, ash 1.3 %, and other components 2.8 % [19]. Studies performed with different varieties of sugarcane bagasse reported that their main chemical composition does not differ significantly [22].

The major effect of alkali treatment is the removal of lignin from the bagasse. FTIR spectroscopy was used to obtain information about the chemical structure of the bagasse before and after treatment. The FTIR spectra for bagasse after both treatments are shown in Figure 2a and 2b. The spectra for untreated fibers were also shown for a comparative study to identify considerable changes in the chemical composition of the bagasse as a consequence of modification due to alkali treatments. The similarity of the FTIR spectra between untreated and treated bagasse fibers was presented in the  $4\,000\text{ cm}^{-1}$  to  $2\,700\text{ cm}^{-1}$  region where the OH and CH stretching vibrations existed. The FTIR spectra for treated fibers were represented by the spectra of fibers after different treatment time in both NaOH and  $\text{Ca}(\text{OH})_2$ . The strong broad band observed in the region of  $3\,700\text{ cm}^{-1}$  to  $3\,000\text{ cm}^{-1}$  is assigned to different OH stretching modes and another band in the region of  $3\,000\text{ cm}^{-1}$  to  $2\,800\text{ cm}^{-1}$  is attributed to the stretching of asymmetric and symmetric methyl and methylene cellulose groups.

Figure 2c shows a  $1\,800\text{ cm}^{-1}$  to  $800\text{ cm}^{-1}$  region in the spectra that revealed several bands. The band at  $1\,624\text{ cm}^{-1}$  is associated with adsorbed water in cellulose and probably some in hemicelluloses. The C-H stretch at  $2\,875\text{ cm}^{-1}$  is present in both untreated and treated fibers. The C-OH bending peaks at  $670\text{ cm}^{-1}$  of cellulose are indicated in all fibers. The obvious differences between the untreated bagasse fibers and treated fibers were noted in the range from  $2\,000\text{ cm}^{-1}$  to  $700\text{ cm}^{-1}$  (Figure 2a and b). Lignin spectra at  $1\,508\text{ cm}^{-1}$  and  $1\,233\text{ cm}^{-1}$  were no longer found in sugar cane fibers that were given shortest treatment time (2 h), either in NaOH or  $\text{Ca}(\text{OH})_2$ . Other bands that are generally found in the lignin


aromatic structure, i.e. at 1 598 cm<sup>-1</sup> and 1 508 cm<sup>-1</sup> which attributed to C-Ph and C=C, respectively were not identified after both treatments.

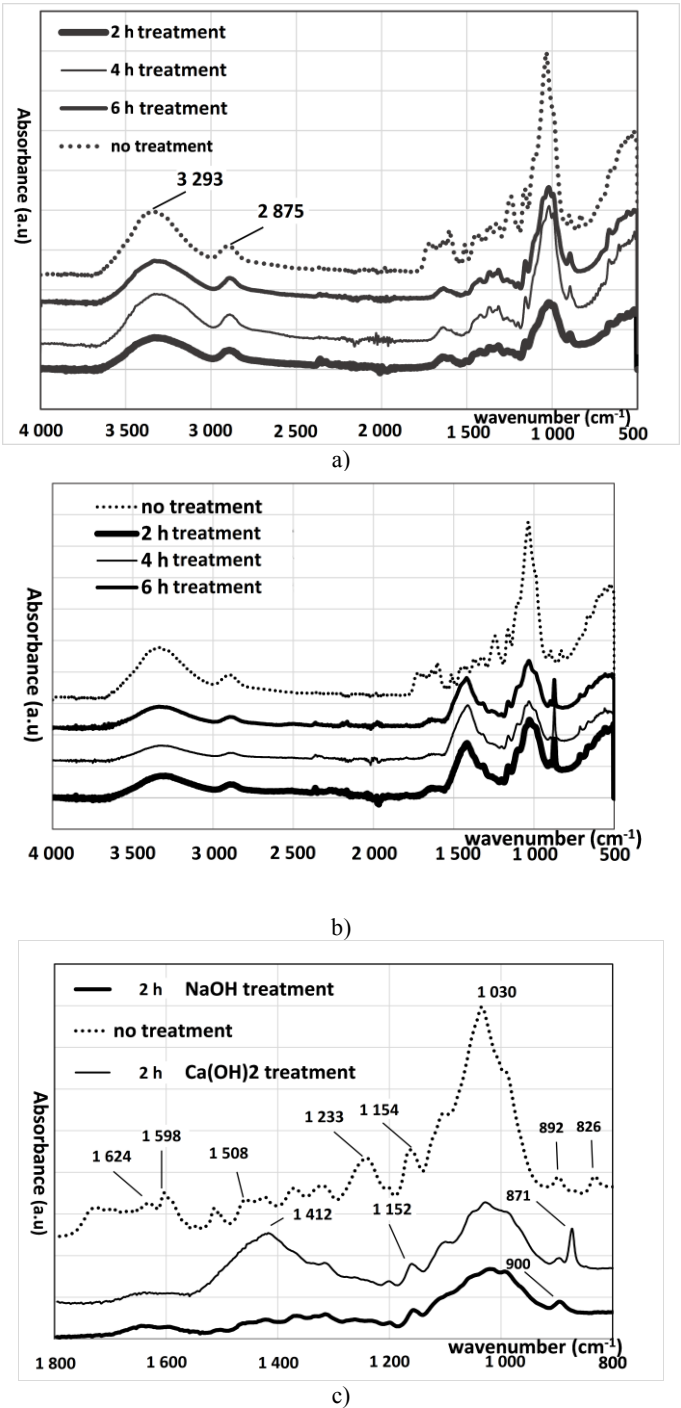

**Fig. 2** FTIR spectra of untreated and treated bagasse fibers in the region between 500 cm<sup>-1</sup> to 4 000 in a) NaOH and b) Ca(OH)<sub>2</sub> and c) in the region between 800 cm<sup>-1</sup> to 1 800 cm<sup>-1</sup> for 2 h treatment in NaOH and Ca(OH)<sub>2</sub>.



The work of Rezende et al. [23] reported a very efficient alkali treatments using NaOH solutions with concentration 1 % where up to 85 % lignin fractions were removed from the solid fraction. The peak  $1\,723\text{ cm}^{-1}$  indicates the carbonyl peak, C=O stretching of the acetyl groups of hemicellulose [24, 25] and can be seen in untreated fibers. The disappearance of that peak indicates the removal of hemicellulose from the fiber surface after both treatments for 2 h. Chen et al. [26] reported that treatment with sodium hydroxide causes the disruption of H-bonding in cellulose and hemicellulose, breakage of ester linkages between lignin and xylan, and deprotonation of phenolic groups. As a result, swelling of cellulose and the partial solubilization of hemicellulose and lignin occurs. There is an indication of carbonate peaks in the range of  $1\,500\text{ cm}^{-1}$  to  $1\,400\text{ cm}^{-1}$  and  $871\text{ cm}^{-1}$  on the fiber treated using  $\text{Ca}(\text{OH})_2$  (Figure 2c). XRD analysis and SEM study performed on the bagasse fiber treated using  $\text{Ca}(\text{OH})_2$  confirmed the existence of carbonate compound.

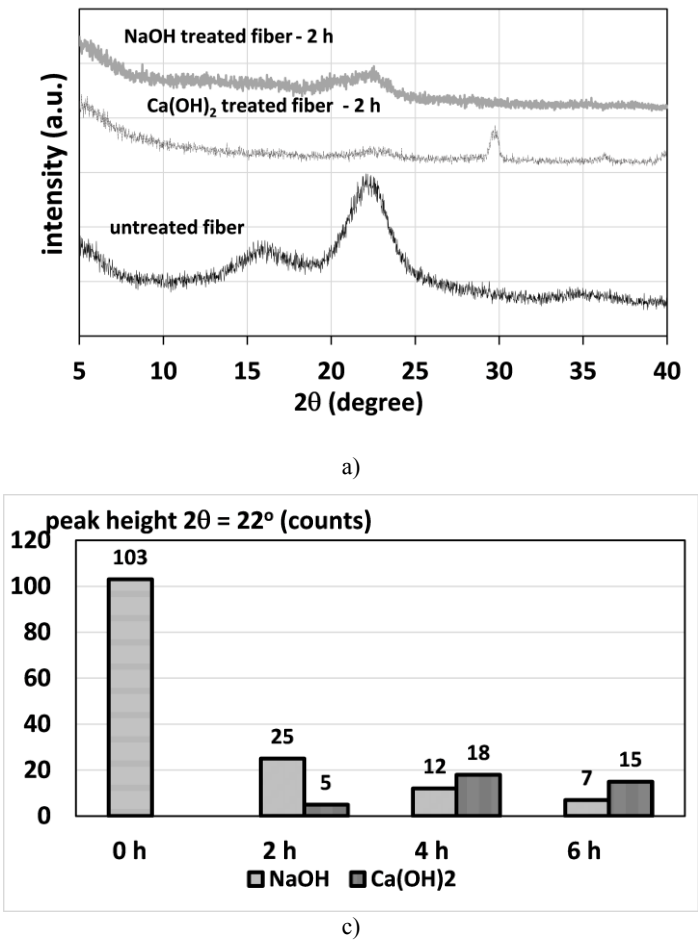

**Fig. 3.** a) X-ray diffractograms of untreated and treated bagasse fibers in NaOH and  $\text{Ca}(\text{OH})_2$  and b) quantitative data of cellulose II after treatment in various treatment time.


Figure 3 shows X-ray diffractograms obtained from untreated and treated fibers both using NaOH and  $\text{Ca}(\text{OH})_2$  of 2 h treatment time. XRD spectra for treated fibers using NaOH and  $\text{Ca}(\text{OH})_2$  solutions for 4 h and 6 h show similarities with spectra of fibers with 2 h treatment, therefore only spectra of 2 h treatment is presented. The diffractogram of

untreated bagasse fiber shows the main diffraction peaks at  $2\theta$  angles:  $15.6^\circ$  and  $22^\circ$  which confirmed the typical cellulose-I structure. Cellulose is a crystalline phase with four different polymorphs of cellulose are known, including cellulose I, II, III, and IV [27]. Alkali treatment in natural cellulose fibers results in the structural transformation from cellulose I (native cellulose) to cellulose II [28, 29]. The major diffraction peak between  $22^\circ$  and  $23^\circ$  referred to cellulose (002) crystallographic planes was found in treated fibers in all treatment time but the weak peak at  $2\theta$  angle  $15.6^\circ$  disappeared (Figure 3a). This structural transformation was observed in the XRD patterns for both treatments which the significant change in diffraction pattern from double peaks as indication of cellulose I to a single peak indicating formation of cellulose II structure.


Figure 3b indicates the changes in cellulose transformation on each treatment as function of treatment time. The values were calculated from the peak height of  $2\theta$  angle  $22^\circ$  to show the values for total cellulose conversion. Treatment with NaOH results in the decrease of cellulose II with the increase of treatment time. It was reported in the literature that for cellulose with low to moderate degree of polymerization, the maximal solubility occurs with 8 % ~ 10 % soda solution [30]. However, the results were noticed as opposite to the results from NaOH treatment in which there was an increase of cellulose II up to 4 h treatment with  $\text{Ca}(\text{OH})_2$  before a slightly decreases after 6 h treatment time. Another peak at  $2\theta$  angle  $29.8^\circ$  was noted at the bagasse sample treated with  $\text{Ca}(\text{OH})_2$  in all treatment time. That peak was an indication of the presence of insoluble calcium carbonate that might be obtained from the mixture with the starting powder of calcium hydroxide used and from being recoverable from water by the reaction with carbon dioxide [21].

### 3.3 Morphological property of modified bagasse

To evaluate the effect of alkali treatment on the morphological surface of bagasse fibers, the samples were studied using SEM. Morphological characteristics of fibres before and after treatment were microscopically observed. Figure 4 shows SEM micrographs of unmodified sugarcane fibers, providing the elementary fibrils and bundles are cemented by lignin and pectin intercellular substances. It shows that cellulose fibers are in one piece and intact due to the presence of lignin. The fiber obtained from sugarcane bagasse was shown by parallel stripes and is partially covered with residual material (pith). They are reported to have a length of 2.5 cm to 20 cm [2].

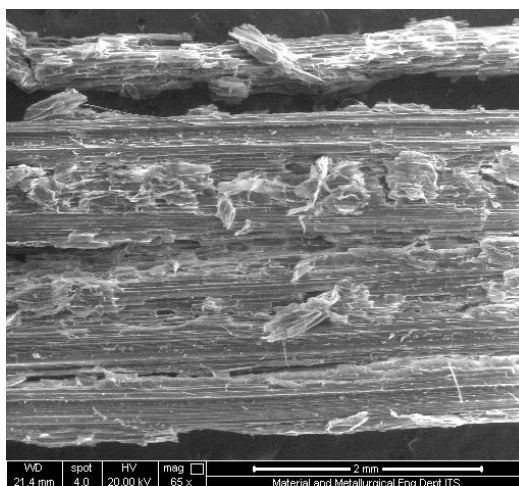

**Fig. 4.** SEM micrographs of longitudinal view of untreated sugar cane fibers.

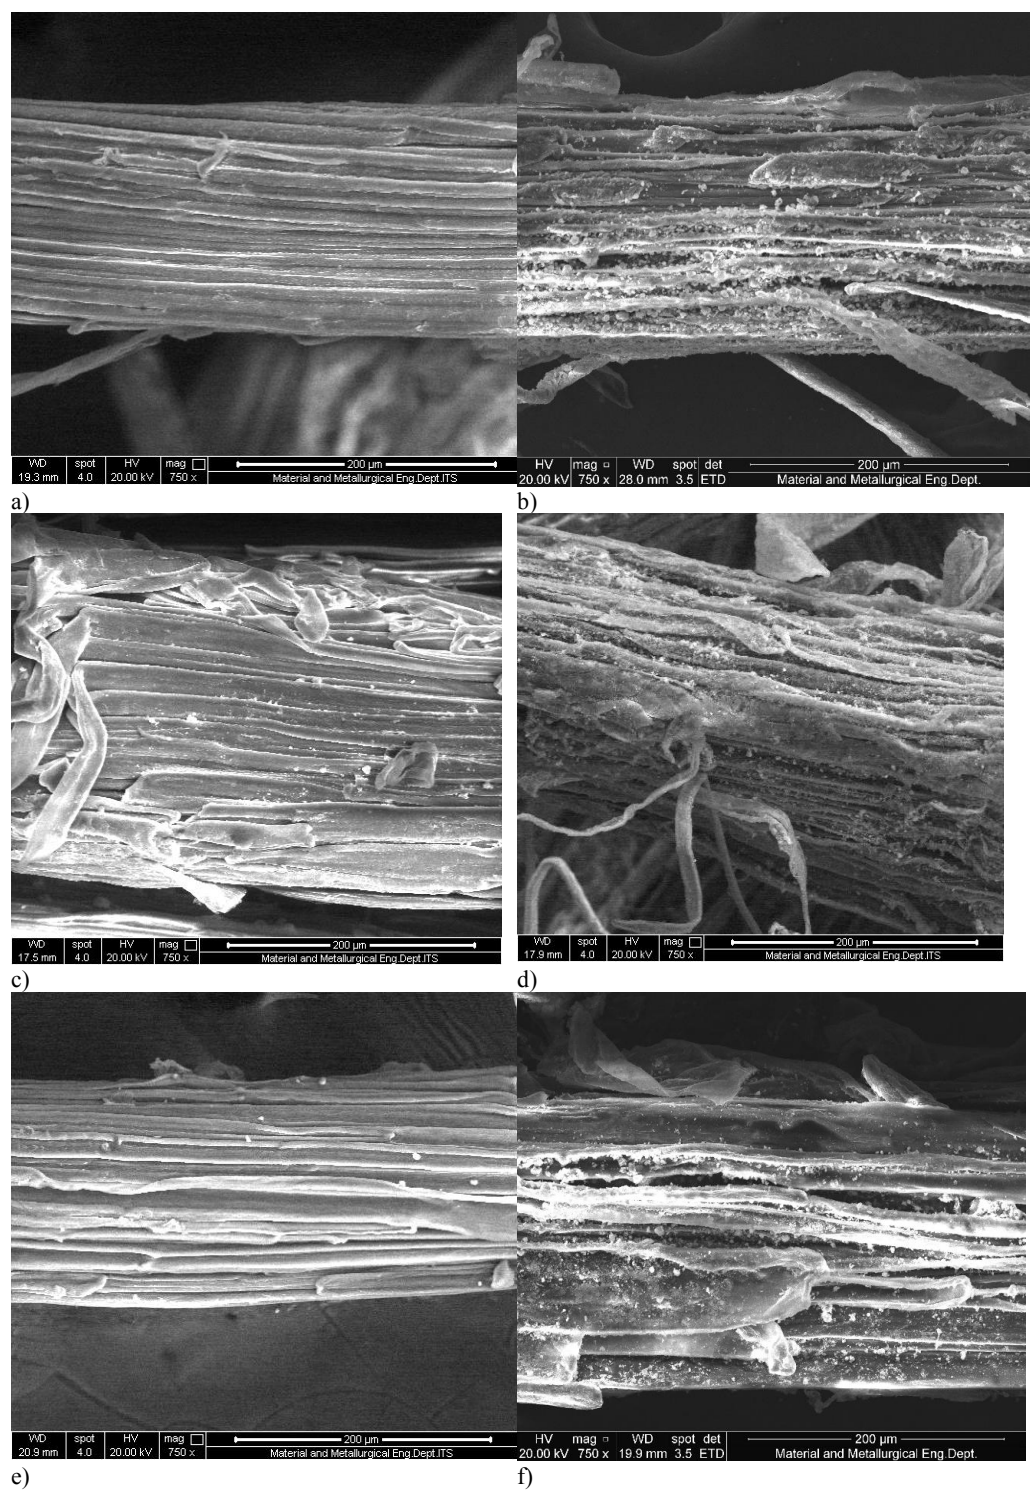


**Fig. 5.** SEM micrographs of bagasse fibers after treated using NaOH for a) 2 h, c) 4 h, and e) 6 h and using Ca(OH)<sub>2</sub> for b) 2 h, d) 4 h, and f) 6 h.



Sugarcane fiber treated with NaOH for 2 h shows that the treatment has been able to eliminate most of the lignin and minor hemicellulose. FTIR spectroscopy detected the removal of lignin and hemicellulose (Figure 3b). The surface micrograph in Figure 5a shows a cleaner surface of the fiber compared to untreated one in Figure 4. An increase of NaOH treatment time to 4 h increases the weight loss of the bagasse from 40.5 % to 45 %. That weight loss is evidenced by a definitive change in the morphological structure occurred after 4 h treatment which the cellulose fibers observed in the micrographs in Figure 5c are partially decomposed. Increase treatment time in NaOH solution to 6 h increased the weight loss to 57.75 %. This loss was supported by FTIR spectra that reported the absence of lignin and hemicellulose spectra. Figure 5e shows deeper contour of cellulose fibers morphology compared to the fiber surface after treatment in NaOH for 2 h (Figure 5a).

SEM observations on bagasse fibers treated with  $\text{Ca}(\text{OH})_2$  for 2 h to 6 h show the defibrillation of cellulose fibers. The defibrillation occurred due to the further removal of the chemical components from the bagasse. Further research is required to reveal the chemical components removed with the increase of treatment time. Figure 5b, 5d, 5f show the cellulose fibrils became more exposed. The weight loss data obtained from treatment using  $\text{Ca}(\text{OH})_2$  are about 62 % to 80 % of the weight loss experienced by the bagasse fiber treated with NaOH. There was an increase in weight loss about 10 % to 11 % with the addition of each 2 h treatment time. The presence of  $\text{CaCO}_3$  precipitate as it has been identified by FTIR and XRD results was evident in the SEM observation. Small particles of  $\text{CaCO}_3$  was found on the fibers surface in all treatment time (Figure 6a). Closer observation on the fiber surface (Figure 6b) shows the crystals of  $\text{CaCO}_3$  was in the initial stage of their formation with needle-like morphology and these shapes were not found anymore on longer treatment time of 4 h and 6 h treatment. The cleanliness of the fiber surface treated with  $\text{Ca}(\text{OH})_2$  was not as good as the fiber surface treated with NaOH.

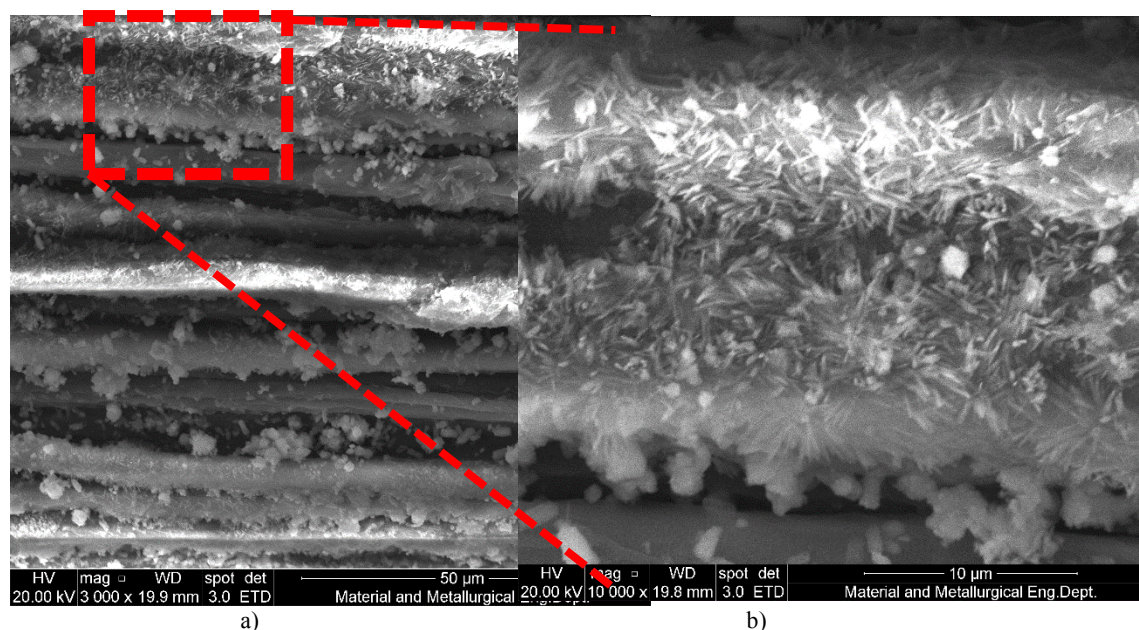

**Fig. 6** SEM micrographs of bagasse fibers after treated with  $\text{Ca}(\text{OH})_2$  for 2 h.

The strength of the fibers after both treatments was not tested. However, their performance can be evaluated through the tensile strength of the biocomposites reinforced

PP using both treated fibers and the results have been reported elsewhere [31]. Overall the strength of the composites using the  $\text{Ca(OH)}_2$  treated fibers was lower than the strength obtained using NaOH treated bagasse fibers.

## Conclusions

Reaction of  $\text{Ca(OH)}_2$  with the bagasse is slower than with NaOH. Treatment bagasse fibers using 10 % vol. NaOH results in larger weight loss compared to treatment done with 14 % vol.  $\text{Ca(OH)}_2$ . Removal of lignin and hemicellulose was notified by FTIR in the first 2 h of treatment in both solutions. FTIR identified that further structural changes were not observed with the additional treatment time to 4 h and 6 h. XRD spectra confirmed the transformation from cellulose I to cellulose II and identified further losses of cellulose with an increase of treatment time in NaOH solution. SEM evaluation on the surface morphology of the bagasse shows significant fibrillation of cellulose bundle treated with  $\text{Ca(OH)}_2$  with particles of  $\text{CaCO}_3$  deposited on the fiber surface.

Authors thank the Ministry of Research, Technology and Higher Education, Republic of Indonesia for the research grant under contract no. 002/SP2H/P/K7/KM/2016.

## References

1. Maps of World. *Top ten sugarcane producing countries in the world* [Online] from <https://www.mapsofworld.com/world-top-ten/sugar-cane-producing-countries.html> (Accessed on 29 March 2016).
2. N. Reddy, Y. Yang. *Innovative Biofibers from Renewable Resources*. Verlag Berlin Heidelberg: Springer (2015). <https://www.springer.com/gp/book/9783662451359>
3. M.O.S Dias, A.V. Ensinasa, S.A. Nebra, R.M. Filho, C.E.V. Rossell, M.R.W. Maciel, *Chem. Eng. Res. Design*, **87**,9:1206–1216(2009).  
<https://www.sciencedirect.com/science/article/pii/S0263876209001749>
4. R. Katzen, D.E. Fowler, *Appl. Biochem. Biotechnol.*, **45**,1:697–707(1994).  
<https://link.springer.com/article/10.1007/BF02941841>
5. C.A. Cardona, J.A. Quintero, I.C. Paz, *Bioresour. Technol.*, **101**,13:4754–4766(2010).  
<https://www.sciencedirect.com/science/article/pii/S0960852409015089>
6. M.O.S Dias, T.L. Junqueira, O. Cavalett, M.P. Cunha, C.D.F. Jesus, C.E.V. Rossell, et al., *Biosour. Technol.* **103**,1:152–161(2012).  
<https://www.sciencedirect.com/science/article/pii/S0960852411014088#!>
7. R. Rodriguez-Vazquez, G. Villanueva-Ventura, E. Riosleal, *Bioresour. Technol.*, **39**,1:17–22(1992).  
<https://www.sciencedirect.com/science/article/pii/S096085249290051X>
8. D. Verma, P.C. Gope, M.K. Maheshwari, R.K. Sharma, *J. Mater. Environ. Sci.* **3**,6:1079–1092(2012).  
[https://www.researchgate.net/publication/284625466\\_Bagasse\\_fiber\\_composites\\_A\\_R\\_eview](https://www.researchgate.net/publication/284625466_Bagasse_fiber_composites_A_R_eview)
9. M. Tewari, V. Singh, P. Gope, A.K. Chaudary, *J. Mater. Environ. Sci.* **3**,1:171–184(2012). <https://www.jmaterenvironsci.com/Document/vol3/17-JMES-153-2011-Tiwari.pdf>
10. B. Ramaraj, *J. Appl. Polym. Sci.*, **103**,6:3827–3832(2007).  
<https://onlinelibrary.wiley.com/doi/abs/10.1002/app.25333>
11. M.V. de Sausa, S.N. Monteiro, J.R.M. d'Almeida, *Polymer Testing*, **23**:253–258(2004).  
<https://www.sciencedirect.com/science/article/pii/S0142941803001156>

12. J. Anggono, Á.E. Farkas, A. Bartos, J. Móczó, Antoni, H. Purwaningsih, et al., Eur. Polym. J., **112**:153–160(2019).  
<https://www.sciencedirect.com/science/article/pii/S0014305718320317>
13. Y.-T. Zheng, D.-R. Cao, D.-S. Wang, J.-J. Chen, Compos. **Part A Appl. Sci. Manuf.**, **38**,1:20–25(2007).  
<https://www.sciencedirect.com/science/article/pii/S1359835X06000819>
14. D.R. Mulinari, H.J.C. Voorwald, M.O.H. Cioffi, M.L.C.P. da Silva, T.G. Cruz, C. Saron, Compos. Sci. Technol. **69**,2:214–219(2009).  
<https://www.sciencedirect.com/science/article/pii/S0266353808004119>
15. Martin, J. Puls, B. Saake, A. Schreiber, Cell Chem. Technol., **45**:487–494(2011).  
[http://www.cellulosechemtechnol.ro/pdf/CCT45.7-8\(2011\)/p.487-494.pdf](http://www.cellulosechemtechnol.ro/pdf/CCT45.7-8(2011)/p.487-494.pdf)
16. P.H.F. Pereira, H.C.J. Voorwald, M.O.H. Cioffi, D.R. Mullinari, S.M.Da Luz, M.L.C.P. da Silva, Bioresour. **6**,3:2471–2482(2011).  
[https://ojs.cnr.ncsu.edu/index.php/BioRes/article/view/BioRes\\_06\\_3\\_2471\\_Pereira\\_V\\_CMDD\\_Sugarcane\\_Bagasse\\_Pulp\\_Bleach\\_Thermal\\_Chemical](https://ojs.cnr.ncsu.edu/index.php/BioRes/article/view/BioRes_06_3_2471_Pereira_V_CMDD_Sugarcane_Bagasse_Pulp_Bleach_Thermal_Chemical)
17. C.C. Geddes, J.J. Peterson, C. Roslander, G. Zacchi, M.T. Mullinnix, K.T. Shanmugam, et al., Bioresour. Technol., **101**:1851–1857(2010).  
<https://www.sciencedirect.com/science/article/pii/S0960852409013200>
18. G.J.D.M. Rocha, C.M. Medina; I.B. Soares, A.M.S. Maior, H.M. Baudel, C. A.M. de Abreu, Biomass Bioenerg., **35**,1:663–670(2011).  
[https://www.researchgate.net/publication/251628703\\_Dilute\\_mixed-acid\\_pretreatment\\_of\\_sugarcane\\_bagasse\\_for\\_ethanol\\_production](https://www.researchgate.net/publication/251628703_Dilute_mixed-acid_pretreatment_of_sugarcane_bagasse_for_ethanol_production)
19. S.M. Luz, A.R. Gonçalves, A.P. Del'Arco, Compos. Part A: Appl. Sci. Manuf., **38**:1455–1461(2007).  
<https://www.sciencedirect.com/science/article/pii/S1359835X07000206>
20. J.M. Paturao. *By products of the cane sugar industry, an introduction to their industrial utilization*. New York: Elsevier Scientific Publication Company (1982).  
<https://trove.nla.gov.au/work/8292736?selectedversion=NBD2110076>
21. P.F.H. Harmsen, W.J.J. Huijgen, L.M.B. López, R.R.C. Bakker. *Literature review of physical and chemical treatment processes for lignocellulosic biomass*. Netherland: BioSynergy Project (2010).  
[https://www.researchgate.net/publication/254853217\\_Literature\\_Review\\_of\\_Physical\\_and\\_Chemical\\_Pretreatment\\_Processes\\_for\\_Lignocellulosic\\_Biomass](https://www.researchgate.net/publication/254853217_Literature_Review_of_Physical_and_Chemical_Pretreatment_Processes_for_Lignocellulosic_Biomass)
22. G.J. de MoraesRocha, V.M. Nascimento, A.R. Gonçalves, V.F.N. Silva, C. Martín, Ind. Crop. Prod. **64**:52–58(2015).  
<https://www.sciencedirect.com/science/article/pii/S092666901400689X>
23. C.A. Rezende, M.A. de Lima, P. Maziero, E.R. de Azevedo, W. Garcia, I. Polikarpov, Biotechnol. Biofuels **4**,54:1–18(2011).  
<https://biotechnologyforbiofuels.biomedcentral.com/articles/10.1186/1754-6834-4-54>
24. J. Biagiotti, D. Puglia, L. Torre, J.M. Kenny, A. Arbelaiz, G. Cantero, et al., Polym. Composite, **25**,5:470–479(2004).  
<https://onlinelibrary.wiley.com/doi/abs/10.1002/pc.20040>
25. W. Liu, A.K. Mohanty, L.T. Drzal, P. Askel, M. Misra., J. Mater. Sci., **39**:1051–1054(2004).  
<https://link.springer.com/article/10.1023%2FB%3AJMSC.0000012942.83614.75>
26. Y. Chen, R.R. Sharma-Shivappa, D. Keshwani, C. Chen. Appl. Biochem. Biotechnol., **142**,3:276–290(2007). <https://www.ncbi.nlm.nih.gov/pubmed/18025588>
27. O. Sauperl, K. Stana-Kleinschek, V. Ribitsch, Text Res J., **79**,9:780–791(2009).  
<https://journals.sagepub.com/doi/abs/10.1177/0040517508096222?journalCode=trjc>

28. G.T. Ciacco, D.L. Morgado, E. Frollini, S. Possidonio, O.A. El Seoud, J Braz. Chem Soc. **21**,1:71–77(2010).  
[http://www.scielo.br/scielo.php?script=sci\\_arttext&pid=S0103-50532010000100012](http://www.scielo.br/scielo.php?script=sci_arttext&pid=S0103-50532010000100012)
29. E. Dinand, M. Vignon, H. Chanzy, L. Heux, Cellulose **9**,1:7–18(2002).  
<https://link.springer.com/article/10.1023/A:1015877021688>
30. L. Chenxi, *Using anaerobic co-digestion with addition of municipal organic wastes and pre-treatment plant sludge*. [Thesis Phd]. Queen’s University Kingston, Ontario, Canada (2012), p. 105.  
[https://qspace.library.queensu.ca/bitstream/handle/1974/7487/Li\\_Chenxi\\_201209\\_PH\\_D.pdf?sequence=1](https://qspace.library.queensu.ca/bitstream/handle/1974/7487/Li_Chenxi_201209_PH_D.pdf?sequence=1)
31. J. Anggono, S. Sugondo, S. Sewucipto, H. Purwaningsih, S. Henrico, AIP Conference Proceedings **1788**,1:1–9(2017). <https://aip.scitation.org/doi/10.1063/1.4968308>