

18th Volume

Volume 18 - 2014

E3S Web of Conferences

Proceedings



E3S Web of Conferences

Volume 130 (2019)

The 1st International Conference on Automotive, Manufacturing, and Mechanical Engineering
(IC-AMME 2018)

Kuta, Bali, Indonesia, September 26-28, 2018

R.H. Setyobudi, F.D. Suprianto, M. Mel, O. Anne, P. Soni, T. Turkadze, Y. Jani and Z. Vincēviča-Gaile (Eds.)

Export the citation of the selected articles [Export](#)

[Select all](#)

Open Access

About the conference

Published online: 15 November 2019

- [PDF \(1.92 MB\)](#)

Open Access

Statement of Peer review

Published online: 15 November 2019

- [PDF \(232 KB\)](#)



Open Access

[Simulation-based Prediction of Structural Design Failure in Fishing Deck Machinery a Hydraulic Type with Finite Element Method 01001](#)

Agri Suwandi, Dede Lia Zariatin, Bambang Sulaksono, Estu Prayogi and I Made Widana

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001001>

- [PDF \(599.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Effect of Frequency on Droplet Characteristics in Ultrasonic Atomization Process](#) 01002

Amelia Sugondo, Sutrisno, Willyanto Anggono and Olga Anne

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001002>

- [PDF \(413.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Sound Absorption Performance of Sugar Palm Trunk Fibers](#) 01003

Anditya Endar Prabowo, Kuncoro Diharjo, Ubaidillah and Iwan Prasetyo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001003>

- [PDF \(645.0 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Characteristics Of Aluminium ADC 12/SiC Composite with the Addition of TiB and Sr Modifier](#) 01004

Astari Indarsari, Anne Zulfia Syahrial and Budi Wahyu Utomo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001004>

- [PDF \(677.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Optimizing The Addition of TiB to Improve Mechanical Properties of the ADC 12/SiC Composite Through Stir Casting Process 01005](#)

Cindy Retno Putri, Anne Zulfia Syahrial, Salahuddin Yunus and Budi Wahyu Utomo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001005>

- [PDF \(585.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Drivers and Barriers of Mobile Phone Remanufacturing Business in Indonesia: Perspectives of Retailers 01006](#)

Didik Wahjudi, Shu-san Gan, Yopi Yusuf Tanoto, Jerry Winata and Benny Tjahjono

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001006>

- [PDF \(379.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Experimental Analysis on Solid Desiccant Used in An Air Conditioning 01007](#)

Ekadewi Angraini Handoyo, Andriono Slamet and Muhammad Danang Birowosuto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001007>

- [PDF \(605.5 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Influences of Groove Angles and Filler Metals on 304L Stainless Steel to AISI 1040 Carbon Steel Dissimilar Joint by Gas Tungsten Arc Welding 01008](#)

Eriek Wahyu Restu Widodo, Vuri Ayu Setyowati, Suheni and Ahmad Rilo Hardianto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001008>

- [PDF \(839.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[The Effect of Biodiesel Blends Made from Carica papaya L. Seeds on the Performance of Diesel Engine 01009](#)

Fandi Dwiputra Suprianto, Willyanto Anggono, Teng Sutrisno, Daniel William Gunawan and Gabriel Jeremy Gotama

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001009>

- [PDF \(990.1 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Container Ship Accident Analysis due to Container Stacked on Deck as an Attempt to Improve Maritime Logistic System 01010](#)

Gafero Priapalla Rahim and Sunaryo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001010>

- [PDF \(474.4 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Automatic Petrol and Diesel Engine Sound Identification Based on Machine Learning Approaches](#) 01011

Halim Frederick, Astuti Winda and Mahmud Iwan Solihin

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001011>

- [PDF \(588.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Optimization of Soft Body Armor with Laminates of Carbon–aramid Fiber and Polyester Fiber Using the Taguchi Method](#) 01012

Hari Purnomo, Wahyu Ismail Kurnia, Farham Haji Muhammad Saleh and Alex Kisanjani

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001012>

- [PDF \(565.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Hybrid Turbulence Models: Recent Progresses and Further Researches](#) 01013

Hariyo Priambudi Setyo Pratomo, Fandi Dwiputra Suprianto and Teng Sutrisno

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001013>

- [PDF \(537.1 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Preliminary Study on Mesh Stiffness Models for Fluid-structure Interaction Problems](#) 01014

Hariyo Priambudi Setyo Pratomo, Fandi Dwiputra Suprianto and Teng Sutrisno

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001014>

- [PDF \(828.8 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Development of Real Time Machine Tools Component Utilization Data Acquisition for developing Dynamic Model of Maintenance Scheduling](#) 01015

Herman Budi Harja, Tri Prakosa, Yatna Yuwana Martawirya, Indra Nurhadi and Andrian Sagisky Januartha

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001015>

- [PDF \(456.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Probabilistic Evaluation of Fatigue Crack Growth Rate for Longitudinal Tungsten Inert Gas Welded Al 6013-T4 Under Various PostWeld Heat Treatment Conditions](#) 01016

I Made Wicaksana Ekaputra, Gunawan Dwi Haryadi, Stefan Mardikus and Rando Tungga Dewa

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001016>

- [PDF \(515.6 KB\)](#)

- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Experimental Performance Analysis of Shallow Spiral-tube Ground Heat Exchangers in Series and Parallel Configurations](#) 01017

Jalaluddin, Akio Miyara, Rustan Tarakka and Muhammad Anis Ilahi Ramadhani

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001017>

- [PDF \(848.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Structural Evaluation on Sugarcane Bagasse Treated Using Sodium and Calcium Hydroxide](#) 01018

Juliana Anggono, Hariyati

Purwaningsih, Suwandi Sugondo, Steven Henrico, Sanjaya Sewucipto and Jay Patel

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001018>

- [PDF \(1.559 MB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[The Influence of Room and Ambient Temperatures of Exergy Loss in Air Conditioning Using Ejector as an Expansion Device with R290 as Working Fluid](#) 01019

Kasni Sumeru, Pratikto Pratikto, Andriyanto Setyawan and Adenkule Moshood Abioye

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001019>

- [PDF \(440.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Automotive Start-Stop Engine Based on Face Recognition System 01020](#)

Lim William, Astuti Winda, Dewanto Satrio, Tan Sofyan and Mahmud Iwan Solihin

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001020>

- [PDF \(1003 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[The Effect of Coconut Shell Powder as Functional Filler in Polypropylene during Compounding and Subsequent Molding 01021](#)

Matt Kirby, Benjamin Lewis, Benjamin Peterson, Juliana Anggono and Walter Bradley

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001021>

- [PDF \(623.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Automotive Start-Stop Engine Based on Fingerprint Recognition System 01022](#)

Pranoko Rivandi, Astuti Winda, Dewanto Satrio and Mahmud Iwan Solihin

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001022>

- [PDF \(459.6 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Effect of T6 on Mechanical Properties of TiB and Sr Modified ADC12/SiC Composite Produced by Stir Casting 01023](#)

Pritamara Wahyuningtyas, Anne Zulfia Syahrial, Wahyuaji Narottama Putra and Budi Wahyu Utomo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001023>

- [PDF \(869.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Regression Equations to Determine the Stages of Electric Current in Electrical Discharge Machining \(EDM\) According to the Level of Desired Surface Roughness with Shortest Processing Time 01024](#)

Roche Alimin, Didik Wahjudi, Hariyanto Gunawan and Prayogo Putra Poernomo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001024>

- [PDF \(597.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Increasing Port Performance through Port Navigation Safety Assessment using the Formal Safety Assessment Method \(Case Study Port of Tanjung Priok - Indonesia\) 01025](#)

Sahlan Ridwan and Sunaryo

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001025>

- [PDF \(354.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[A Feasibility Study of Mobile Phone Casings Remanufacturing 01026](#)

Shu-San Gan, Juliana Anggono, Didik Wahjudi, Yopi Tanoto, Randy and Novana Hutasoit

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001026>

- [PDF \(540.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[3D Simulative Investigation of Heat Transfer Enhancement Using Three Vortex Generator Types Surrounding Tube in Plate Fin Heat Exchanger 01027](#)

Stefan Mardikus, Petrus Setyo Prabowo, Vinsensius Tiara Putra, Made Wicaksana Ekaputra and Juris Burlakovs

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001027>

- [PDF \(770.6 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Investigation on the Sandwich System Hull Materials for Solar Powered Electrical Sport Boat 01028](#)

Sunaryo and Aldy Syahrhaddin Hanifa

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001028>

- [PDF \(589.6 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Electrical System Design of Solar-Powered Electrical Water Recreational and Sport Vessel 01029](#)

Sunaryo and Pradhana Shadu Imfianto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001029>

- [PDF \(674.8 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Experimental Investigation of Avocado Seed Oil Utilization in Diesel Engine Performance 01030](#)

Sutrisno, Willyanto Anggono, Fandi Dwiputra Suprianto, Cokro Daniel Santosa, Michael Suryajaya and Gabriel Jeremy Gotama

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001030>

- [PDF \(517.8 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Optimization of Boring Process Parameters in Manufacturing of Polyacetal Bushing using High Speed Steel 01031](#)

The Jaya Suteja, Yon Haryono, Andri Harianto and Esti Rinawiyanti

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001031>

- [PDF \(379.0 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Development of Total Hip Joint Replacement Prostheses Made by Local Material: An Introduction 01032](#)

Tresna Priyana Soemardi, Agri Suwandi, Cholid Badri, Anwar Soefi Ibrahim, Sastra Kusuma Wijaya and Januar Parlaungan Siregar

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001032>

- [PDF \(549.9 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Strategy to Improve Recycling Yield of Aluminium Cans 01033](#)

Victor Yuardi Risonarta, Juliana Anggono, Yosias Michael Suhendra, Setyo Nugrowibowo and Yahya Jani

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001033>

- [PDF \(317.9 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Using Agricultural Waste to Create More Environmentally Friendly and Affordable Products and Help Poor Coconut Farmers](#) 01034

Walter L. Bradley and Sean Conroy

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001034>

- [PDF \(783.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Intelligent Automatic V6 and V8 Engine Sound Detection Based on Artificial Neural Network](#) 01035

Wenny Vincent, Astuti Winda and Mahmud Iwan Solihin

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001035>

- [PDF \(585.9 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Effect of Various Supercharger Boost Pressure to in-Cylinder Pressure and Heat Release Rate Characteristics of Direct Injection Diesel Engine at Various Engine Rotation](#) 01036

Willyanto Anggono, Wataru Ikoma, Haoyu Chen, Zhiyuan Liu, Mitsuhisa Ichiyanagi and Takashi Suzuki

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001036>

- [PDF \(791.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Experimental and Numerical Investigation of Laminar Burning Velocities of Artificial Biogas Under Various Pressure and CO₂ Concentration](#) 01037

Williyanto Anggono, Akihiro Hayakawa, Ekenechukwu C. Okafor and Gabriel Jeremy Gotama

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001037>

- [PDF \(560.1 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Kinematic Analysis of Triple Ball Tie-rod in Ackermann Steering and Tilting Mechanism for Tricycle Application](#) 01038

Wimba Pramudita Wid, AUFAR SYEHAN and DANARDONO AGUS SUMARSONO

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001038>

- [PDF \(704.2 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Process Planning Review for Mobile Phone Remanufacturing in Indonesia](#) 01039

Yopi Yusuf Tanoto, Shu-San Gan, Didik Wahjudi, Niko Adrisenna Pontjonoto and Michael Suryajaya

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001039>

- [PDF \(326.7 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Studies on Water Sorption Behaviour of Laminated Bamboo Polymer Composite](#) 01040

Yuniar Ratna Pratiwi, Indah Widiastuti and Budi Harjanto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001040>

- [PDF \(408.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[The Impact of Enterprise Resources Planning Implementation in Cross-Functional for Sharing Knowledge and Quality Information in Preparing the Financial Statements](#) 01041

Zeplin Jiwa Husada Tarigan, Sautma Ronni Basana and Widjojo Suprpto

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001041>

- [PDF \(333.3 KB\)](#)
- [References](#)
- [NASA ADS Abstract Service](#)



Open Access

[Effect of Key User Empowerment, Purchasing Strategy, Process Integration, Production System to Operational Performance](#) 01042

Zeplin Jiwa Husada Tarigan, Hotlan Siagian, Sautma Ronni Basana and Ferry Jie

Published online: 15 November 2019

DOI: <https://doi.org/10.1051/e3sconf/201913001042>

- [PDF \(426.6 KB\)](#)
- [References](#)

- [NASA ADS Abstract Service](#)

Source details

Feedback > Compare sources >

E3S Web of Conferences

Open Access
Scopus coverage years: from 2013 to 2021
Publisher: EDP Sciences
E-ISSN: 2267-1242

Subject area: [Earth and Planetary Sciences: General Earth and Planetary Sciences](#) [Energy: General Energy](#) [Environmental Science: General Environmental Science](#)

Source type: Conference Proceeding

[View all documents >](#) [Set document alert](#) [Save to source list](#) [Source Homepage](#)

CiteScore 2021	0.8
SJR 2021	0.237
SNIP 2021	0.364

CiteScore CiteScore rank & trend Scopus content coverage

Improved CiteScore methodology
CiteScore 2021 counts the citations received in 2018-2021 to articles, reviews, conference papers, book chapters and data papers published in 2018-2021, and divides this by the number of publications published in 2018-2021. [Learn more >](#)

CiteScore 2021
0.8 - $\frac{19,869 \text{ Citations } 2018 - 2021}{25,181 \text{ Documents } 2018 - 2021}$
Calculated on 05 May, 2022

CiteScoreTracker 2022
0.8 - $\frac{17,582 \text{ Citations to date}}{21,482 \text{ Documents to date}}$
Last updated on 06 June, 2022 - Updated monthly

CiteScore rank 2021

Category	Rank	Percentile
Earth and Planetary Sciences General Earth and Planetary Sciences	#142/191	25th
Energy General Energy	#54/68	21st
Environmental Science	#183/228	19th

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site >](#)

Would you help us improve Scopus?
It will take just a few minutes.
[Maybe later](#) [Share your thoughts](#)



IC-AMME
INTERNATIONAL CONFERENCE
ON AUTOMOTIVE, MANUFACTURING,
AND MECHANICAL ENGINEERING



CONTINUING
EDUCATION
CENTRE

Certificate

awarded to

Juliana Anggono

for participation as

Presenter & Participant

at 1st annual IC-AMME 2018

International Conference on Automotive,
Manufacturing, and Mechanical Engineering

September 26 - 28, 2018

Holiday Inn Resort Baruna Bali
Bali - Indonesia



IC-AMME

Dr. Didik Wahjudi, M.Sc., M.Eng.

The Effect of Coconut Shell Powder as Functional Filler in Polypropylene during Compounding and Subsequent Molding

Matt Kirby^a, Benjamin Lewis^a, Benjamin Peterson^a, Juliana Anggono^b, Walter Bradley^{a*}

^aBaylor University, 1301 S University Parks Dr, Waco, TX 76706, United States

^bPetra Christian University, Jalan Siwalankerto 121-131 Surabaya 60236, Indonesia

Abstract. Fine powder produced from coconut shells (CSP) has been found to be excellent functional filler in polypropylene, significantly increasing flexural and tensile moduli, slightly increasing tensile strength, and good retention of Izod impact strength at weight percentages less than 20 %. The research presented in this paper explores the temperature processing window for coconut shell powder filled polypropylene and the change in the rheological behavior of the polypropylene due to the addition of CSP as functional filler in this processing temperature window. The reason for the simultaneous increase in flexural modulus, tensile strength, and good retention of Izod impact behavior is also investigated

Key words: Functional filler, impact strength, natural filler reinforcement, polymeric composites, rheological behavior.

1 Introduction

There is a growing interest in making polymeric composite materials that are more sustainably by using functional fillers that are renewable. Coconut shell powder (CSP) produced from discarded coconut shells in the production of coconut oil has been found to be a very effective functional filler in polypropylene because CSP is a lignin rich biomass that is four times harder than hard maple and other hardwoods [1]. The addition of 10 wt% to 20 wt% CSP to polypropylene (PP) can increase the flexural modulus from 40 % to 70 %, the tensile strength from 30 % to 50 % with good retention of Izod impact strength [2].

These exciting results have stimulated a keen interest to know how the incorporation of CSP into PP will affect its processing. How will the upper and lower bound temperatures which define the processing window for compounding and for injection molding or extruding change when CSP is used as functional filler in PP. An equally important question is how is the rheological behavior of the PP is altered with the addition of various amounts of coconut shell powder? A third significant question is how can the coconut shell powder increase the strength and stiffness of polypropylene with good retention of its Izod impact strength, which is most unusual?

* Corresponding author: Walter_Bradley@baylor.edu

2. Literature survey

2.1 Maximum allowable processing temperature

The upper bound for the thermal processing window is usually determined by thermal degradation, which occurs through thermally induced breaking of covalent bonds. While it is normally possible to process most thermoplastics at temperatures well below the temperature at which they thermally degrade, most natural filler will have somewhat lower thermal degradation temperature than PP, which may require the thermoplastic to be processed at a lower temperature than would normally be used. Most lingo-cellulosic biomass contains three microstructural constituents: lignin, cellulose, and hemi-cellulose. Thermal degradation begins for such biomass around 200 °C [3]. Polypropylene is usually processed between 180 °C and 230 °C. Therefore, the specific degradation temperature and behavior of each potential natural filler must be fully understood before it can be considered as functional filler for PP.

Since thermal degradation is a thermally activated breaking of chemical bonds, it proceeds at a rate that is defined by the Arrhenius relationship for thermally activated processes in nature; namely, ($\sim \exp[-Q/kT]$) [2]. However, the total amount of degradation depends on the time spent at that temperature. For example, natural fillers that thermally degrade by 5 wt% at 200 °C in 60 min might thermally degrade by 5 wt% at 230 °C in 3 min. Thus, the selection of the “maximum permissible temperature” for the processing window will depend on the anticipated time that the polymer and functional filler will be in the extruder or injection molding machine barrel. The effect of time on thermal degradation at different temperatures has been well documented for wood fillers and other lingo-cellulosic fillers such as hemp and flax [4, 5]. The thermal degradation of coconut shell has also been studied extensively by Macedo et al. [6]. However, these studies were done using a thermo-gravimetric analyzer (TGA) using only ramp heating, making it difficult to determine the accumulated degradation as a function of time at various processing temperatures. Furthermore, they used pieces of coconut shell whereas in this work, coconut shell powder were used with a diameter of $\sim 150 \mu\text{m}$ and a much greater surface area. Finally, to give guidance to compounders and injection molders, this research had an interest in the rate of degradation for coconut shell powder imbedded in PP, which would delay for some time the onset of thermal degradation just due to the thermal inertia associated with heating up PP pellets with CSP already compounded into them.

2.2 Minimum allowable processing temperature

The lower bound of the processing window of a semi-crystalline thermoplastic polymer like PP is defined by the onset of crystallization. Like thermal degradation, the rate of crystallization is a function of temperature, but for a somewhat more complex process than thermal degradation, involving as it does nucleation of small crystals and their subsequent growth [7]. As the temperature is lowered below the equilibrium melting temperature (which is called super cooling), the time to nucleate and grow spherulites becomes progressively shorter. However, a very rapid quench can avoid the formation of spherulites altogether. The processing temperature in the injection molding of larger, complex parts needs to be done at a temperature sufficiently above the temperature at which

crystallization begins to allow the mold to be completely filled before cooling leads to crystallization, which can cause cold shuts.

While the lower bound temperature for the processing window is well known for various PP polymers, it is possible that this window might change for PP with CSP. The CSP may provide heterogeneous nucleation sites that would make the nucleation of spherulites much easier, and therefore allow crystallization to begin at a higher temperature (at a smaller degree of super cooling). Thus, the processing window with CSP is definitely lower on the high temperature side and higher on the low temperature side, resulting in a smaller processing temperature window.

The unusual combination of CSP in PP enhancing tensile strength, flexural modulus and having good retention of Izod impact strength may be the result of heterogeneous nucleation of spherulites on the CSP particles, giving a much finer spherulitic structure, which would in turn give more tie molecules, resulting in greater tensile strength and greater Izod impact strength [7]. A higher wt% of crystallinity might also result from heterogeneous nucleation, giving a higher flexural modulus.

2.3 Rheological behavior of CSP filler PP in the temperature window for processing

The addition of fillers to PP is known to increase its viscosity [8]. The extent of this increase is largely based on several characteristics of the filler such as: materials type, size, aspect ratio, surface roughness and wt% loading [8]. It is essential that the change in viscosity with wt% loading of CSP in PP be determined for a wide range of shear rates over the range of temperatures in the processing window. This will make it possible to understand the tradeoffs between enhancement of the mechanical properties of PP with CSP filler and the increase in degree of difficulty in molding with this filled polymer. The impact of CSP on the rheological behavior of PP has not previously been studied.

3. Experimental plans and procedures

The four research questions that will be addressed deal with how the use of CSP as functional filler in PP affects:

- i. The maximum allowable processing temperature in the processing temperature window;
- ii. The minimum allowable processing temperature in the processing temperature window;
- iii. The rheological behavior of the polymer in the temperature processing window;
- iv. The PP crystallinity and morphology to give the filled PP a uniquely attractive combination of tensile strength, flexural modulus, and Izod impact strength.

3.1 Materials

The polypropylene (PP) used in this investigation is a polypropylene copolymer that is used in the automotive industry for injection molded parts. The copolymer is primarily polypropylene with some polyethylene to enhance low temperature impact properties. The melt index for the polypropylene copolymer is 20 g 10 min⁻¹.

The coconut shell powder has been produced by processing coconut shell into a fine powder with a maximum particle size of 150 μm and a median particle size of 65 μm. To provide good interfacial bonding between the CSP and PP, 2 % maleic anhydride polypropylene (MAPP) was added as a compatibilizer.

3.2 Maximum allowable processing temperature

The maximum allowable processing temperature is determined by the thermal degradation of the CSP functional filler in the PP. The thermal degradation was studied using mass loss as a function of time and temperature to track the degradation. These measurements of mass loss were made on a Thermal Analysis (TA) Q50 Thermogravimetric Analyzer. Coconut shell powder and coconut shell powder compounded into PP were both studied. Powder sample masses were (13.5 ± 2) mg and pellet sample masses were (23.5 ± 2) mg to minimize the variability due to thermal transients in the samples. Two temperature-time histories were used to map out the thermal degradation as a function of temperature and time-at-temperature. First, a constant heating ramp of $2 \text{ }^\circ\text{C min}^{-1}$ was performed; and second, a rapid heating to a fixed temperature followed by an isothermal hold was conducted.

3.3 Minimum allowable processing temperature and effect of CSP on wt% crystallinity

The minimum allowable processing temperature in PP is determined by the onset of crystallization. The crystallization that occurs during cooling of PP can be studied by measuring the latent heat of crystallization that is released as the PP has a phase change from amorphous to crystalline PP. The crystallization kinetics of PP with and without CSP functional filler was studied by measuring the release of the latent heat of crystallization using a Thermal Analysis (TA) Q20 Differential Scanning Calorimeter. The measurement of heat released as a function of temperature and time allow the temperature at which crystallization begins and the temperature at which the crystallization process has ceased to be determined. The total energy released per gram of material in the DSC allows the wt% crystallinity to be determined as well. Polypropylene with 0 wt%, 10 wt% and 20 wt% CSP was studied. The sample masses were 12 ± 3 mg to minimize thermal transients in the samples.

3.4 Effect of CSP on rheological behavior of PP in thermal processing window

The primary objective of the rheological research is to determine the effect of CSP on the viscosity of PP. Two secondary objectives are to determine the additional effects of moisture content and degradation of the CSP on the viscosity of the CSP filled PP.

A Tinius Olsen MP600 Melt-Plastometer (melt flow indexer) was used to measure apparent viscosity versus shear rate from 100 (1 s^{-1}) to 1000 (1 s^{-1}). Calculations proposed by Shenoy et al [9] for obtaining rheological data from a melt flow indexer were used. Neat PP pellets and PP pellets compounded with 10 wt%, 20 wt%, and 30 wt% CSP powder were prepared using CSP that had been dried in a furnace at $160 \text{ }^\circ\text{C}$ for 2 h, reducing the moisture content from 6.7 wt% to 1 wt% until 2 wt%. The resultant pellets of PP with CSP filler were subsequently dried briefly at $90 \text{ }^\circ\text{C}$ to remove surface moisture just before loading them into the barrel of the Melt-Plastometer. The melt time in the barrel for the pellets was approximately three minutes to minimize thermal degradation of the CSP in the pellets. Fixed loads were applied to the piston of the melt flow indexer and the volumetric flow-rate was measured. From this data, the apparent viscosity vs. shear rate was determined for loadings of 10 wt%, 20 wt%, and 30 wt% CSP.

The effect of moisture in the CSP at the time of compounding on the viscosity versus shear rate was also studied. CSP with 6.7 wt% moisture was compounded into PP. The

resulting pellets were tested as described in the preceding paragraph and compared to results on PP with CSP that was dried to 1 wt% to 2 wt% moisture before compounding.

To explore the effect of thermal degradation on the viscosity versus shear rate, the rheological measurements described above were repeated on PP with 30 wt% CSP using a dwell time in the barrel of the melt flow indexer of 3 min and 10 min to allow more time for degradation. The results for these two different dwell times in the barrel were compared to indicate what if any effect thermal degradation might have on the rheological properties of PP filled with 30 wt% CSP

4. Results and discussion

4.1 Maximum allowable processing temperature

The most important limitation in the use of natural fillers in thermoplastics is the thermal degradation temperature. If this temperature is below the usual processing temperature for a given plastic, it cannot be used as functional filler in that polymer. The TGA results for coconut shell powder (CSP) are presented in Figure 1 along with results for powders (sometimes called flour) made from rice hulls, walnuts shells and pine wood.

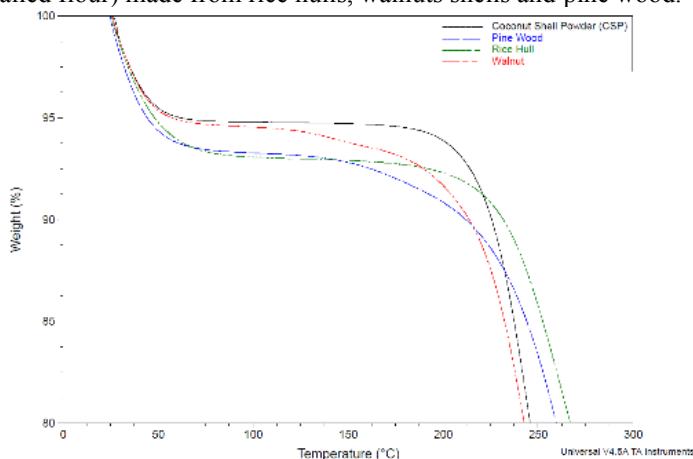


Fig. 1. Thermal degradation of natural fillers (2 °C min⁻¹)

The initial drop in weight is due to the removal of water from these natural fillers. This was 6.7 wt% in CSP. The subsequent deviation from the plateau is due to thermal degradation, which converts some of the biomass into volatiles, with a resultant loss in mass. The powders made from walnuts and pine wood (and also wheat straw and maple which are not shown) begin to thermally degrade at temperature of 160 °C or less. The melt temperature for polypropylene and copolymers of polypropylene is approximately 170 °C, with processing temperature somewhat higher. Thus, many natural fillers will degrade, smoke and smell when processed in polypropylene. Coconut shell powder and rice hulls have less than 1 % wt loss at 200 °C. This higher degradation temperature is why CSP can be compounded into PP using an extruder without any significant thermal degradation.

Most plant biomass is comprised of hemicelluloses, cellulose, and lignin with lignin being the most resistant to thermal degradation. The thermal degradation temperature of the biomass will depend on the relative mass fraction of each of these constituents and their arrangement in the microstructure of the biomass. Coconut shell has one of the highest lignin contents of any plant biomass, and it is this high lignin content that makes it resistant to thermal degradation and resistant to microbial attack as well [10].

The temperature requirements for injection molding are higher than for compounding, and especially so if one is making larger and/or more complex parts. Fortunately, the resistance to thermal degradation of the CSP is somewhat greater when it is encapsulated in pellets of PP, as there is a thermal lag associated with the heat transfer through the PP. The thermal degradation of CSP filled PP is presented in Figure 2. TGA measurements with a ramp of 2 °C min⁻¹ are presented for neat PP, and PP with 10 mass% CSP, 20 mass% CSP, and 30 mass% CSP. The results from Figure 1 for CSP that has not been encapsulated are included for comparison.

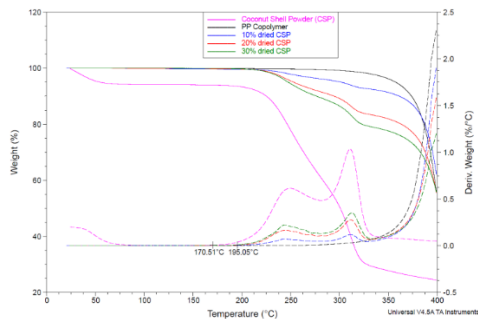


Fig. 2. Thermal degradation of neat PP, and PP with 10 mass% CSP, 20 mass% CSP, and 30 mass% CSP. CSP that is not encapsulated is also included for comparison.

The derivative of weight loss versus temperature is also included to allow one to see more accurately the onset of degradation. The comparison of the CSP and the PP curves demonstrate the much greater thermal stability of the PP compared to the CSP. The three curves in-between show the thermal degradation of the CSP encapsulated in the PP. The delayed onset and the slower rate of thermal degradation of the CSP in the PP is evident and due to thermal lag associated with heat transfer through the PP, which has a low thermal conductivity. This increases the allowable temperature for injection molding over what is permissible in compounding by about 25 °C. It is also worth noting that the CSP was dried to 1 wt% to 2 wt% moisture before being compounded into the PP, which is why there is almost no weight loss due to moisture for the PP pellets, with or without CSP.

The rate of degradation of CSP encapsulated in PP at 210 °C was determined by isothermal tests performed using the TGA. The purpose of these tests was to quantify the level of degradation that might take place during the dwell time in the barrel of an extruder or injection molding machine. The results are presented in Figure 3.

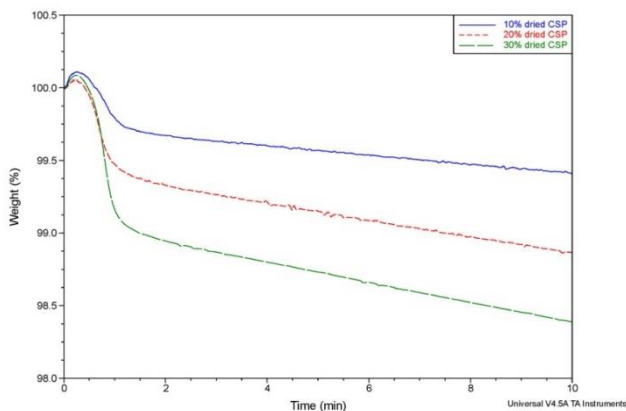


Fig. 3. Thermal degradation of CSP filled PP at 210 °C

The initial drop of ~1 wt% in the first minute at 210 °C is due to loss of the residual 1 % moisture that is still present in the coconut shell powder after drying. The slopes of the three curves indicate a rate of weight loss of the composite of 0.025 wt% min⁻¹, 0.050 wt% min⁻¹ and 0.075 wt% min⁻¹ of composite for 10 wt%, 20 wt% and 30 wt% respectively of CSP filling in the PP. Assuming all of the degradation takes place in the CSP, which is justified by the results in Figure 2, all three curves correspond to a weight loss of CSP of 0.25 wt% min⁻¹ at 210 °C. This remarkably low rate of CSP degradation at 210 °C is consistent with Figure 2 and with the experience of a number of commercial compounders and injection molders who have been pleasantly surprised at how easily coconut shell powder can be compounded into PP and subsequently injection molded without the smoking, smelling and associated degradation that is often found with other natural fillers.

4.2 Minimum allowable processing temperature and effect of CSP on wt% crystallinity

The differential scanning calorimeter measurements were designed to determine if coconut shell powder (CSP) not only served directly as a stiffener of the PP but also indirectly as a stiffener by increasing the wt% of crystallinity in PP by acting as a nucleating agent for crystallization. The results are presented in Figures 4 to Figure 6. The melting curve corresponds to second heating so that the data corresponds to the first cooling and crystallization in the PP. The rate of cooling and heating was 10 °C min⁻¹.

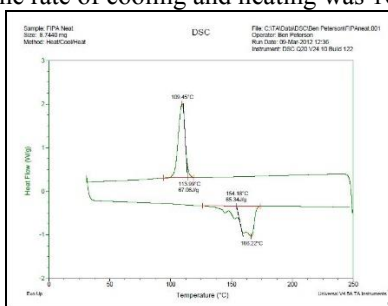


Fig. 4. DSC results for neat polypropylene co-polymer.

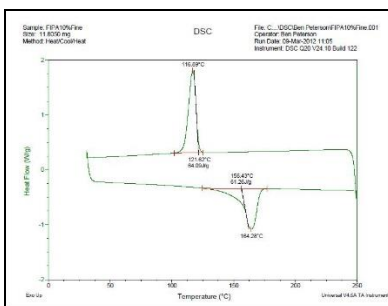


Fig. 5. DSC results for polypropylene co-polymer with 10 wt% CSP filler.

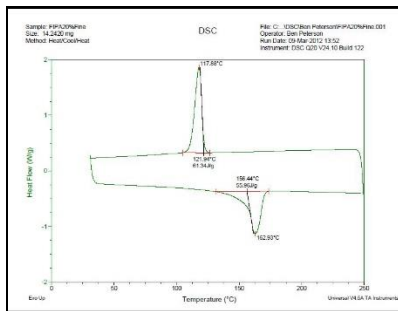


Fig. 6. DSC results for polypropylene co-polymer with 20 wt% CSP.

The two most interesting observations of the DSC results in Figures 4 to Figure 6 are (i) the changes in the temperature at which crystallization begins for the neat PP copolymer compared to the PP copolymer with CSP filler and (ii) the total energy released during crystallization, which corresponds to the wt% of crystallinity in the PP copolymer.

If one considers the onset of melting as T_m and the onset of crystallization as T_c , then the degree of super cooling ΔT_s required to nucleate crystallization at the cooling rate imposed by the DSC is

$$\Delta T_s = T_m - T_c \quad (1)$$

For the neat PP copolymer, the super cooling ΔT_s required to nucleate spherulites is 13.5 °C. For the PP copolymer with 10 wt% CSP filler and 20 wt% CSP filler; the observed super cooling is only 6.1 °C and 5.8 °C respectively. This clearly suggests that the coconut shell powder is functioning as a nucleating agent, facilitating heterogeneous nucleation. This would also suggest that the spherulites size should be smaller in filled PP copolymer, which would provide more tie molecules between spherulites and account for the excellent Izod impact strength with additions of 10 wt% CSP or 20 wt% CSP.

The area under the crystallization curves can be used to determine the $J g^{-1}$ of heat released during crystallization. After correcting for the wt% of CSP, the measured heat released during crystallization per gram of PP copolymer in the three polymeric composites are as follows: neat-67.1 $J g^{-1}$; 10 wt% CSP-71.2 $J g^{-1}$; and 20 wt% CSP-76.7 $J g^{-1}$.

The measure heat released per gram of PP copolymer can then be used to estimate the degree of crystallization if the heat of fusion for crystallization is known. Unfortunately, the heat of fusion is not known precisely for the PP copolymer used in this investigation. The heat of fusion can vary from 163J g^{-1} to 118J g^{-1} as the ethylene in the PP copolymer increases from 0 wt% to 18 wt% [11]. The neat PP copolymer would have a degree of crystalline of between 41 wt% and 57 wt% depending on the wt% polyethylene in the proprietary copolymer. The 10 wt% CSP system would have a crystallinity of between 44 wt% and 60 wt% and the 20 wt% SCP system would have a crystallinity between 47 wt% and 65 wt%. As the wt% CSP increases, the wt% of crystallinity increases by about 15 % (from 41 wt% to 47 wt%, for example). The increase in degree of crystallization provides additional evidence to support the hypothesis that the CSP serves as a nucleating agent in the PP copolymer.

While this increase in crystallinity accounts for some of the observed 70 % increase in flexural modulus, it cannot account the whole increase that results when CSP is used as a functional filler in PP copolymers. Thus, the CSP must also be contributing directly to the increase in stiffness by acting as a hard second phase particle in the PP copolymer beyond the benefits it provides as a nucleating agent.

4.3 Effect of CSP on rheological behavior of PP in thermal processing window

The effect of CSP on the apparent viscosity is seen in Figure 7, characterizing the change of viscosity for four different loadings of CSP.

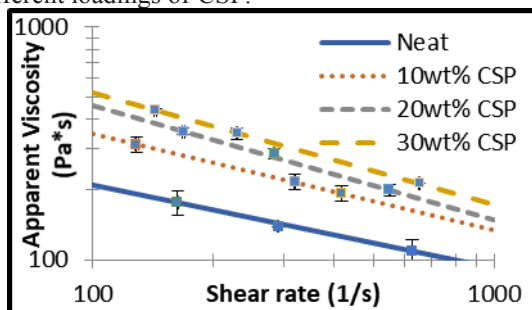


Fig. 7. Apparent viscosity versus shear rate for neat PP copolymer with and without CSP at 210 °C

The results indicate that the viscosity of the filled polypropylene increases with increasing percent loading of CSP. However, the observed increase is quite small compared to other fillers. A second anomaly in the influence of CSP on viscosity is that increasing increments of CSP have a reduced impact on the viscosity, as seen in Figure 8. Shenoy [1] has noted in this regard, “With increasing concentration of the filler, the inter-particle interactions increase weakly at first and then rather strongly as the concentration becomes higher and higher.” Therefore, it could be expected that viscosity is more sensitive to filler loading changes at higher loadings, which is clearly not the case for CSP filler in this PP copolymer, as seen in Figure 8.

These small relative viscosity values and decreasing viscosity sensitivity at higher filler loadings allow the CSP composite to process easily without requiring an excess of additional energy in the form of heat or injection pressure. The reason for this decreasing incremental impact of CSP on the viscosity of PP copolymer seen in Figure 8 could be organic nature of CSP and/or the shape of the CSP particles, as seen in Figure 9. The CSP particles are seen to be globular rather than fibrous, and this would account in part for their relatively small impact on the viscosity of the PP copolymer, as seen in Figure 7.

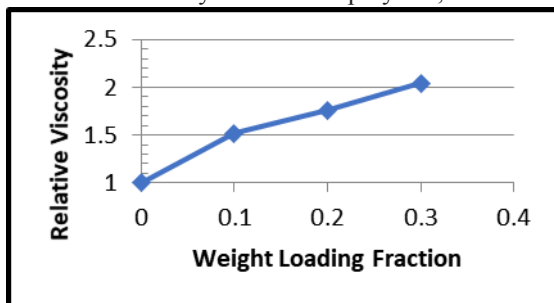


Fig. 8. Relative viscosity vs. weight loading fraction at 210 °C at the shear rate of 500 (1 s^{-1})

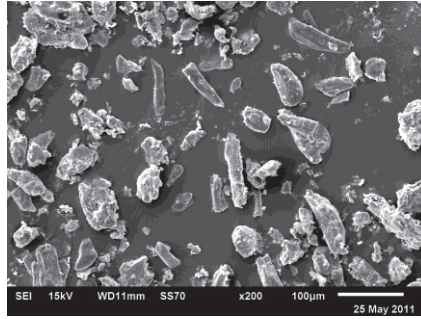


Figure 9. SEM photograph of CSP.

It was hypothesized that moisture and thermal degradation of the CSP could increase molecular mobility, and therefore, decrease viscosity. The amount of both moisture in the CSP and thermal degradation of the CSP would increase with an increase in weight percent loading in a composite, which might account for the observations in Figure 8. The viscosity for PP copolymer with 20 wt% CSP with 2 wt% moisture and with 6.7 wt% moisture is compared in Figure 10. The effect of moisture is seen to be minimal.

The results in Figure 11 can be used to infer whether thermal degradation can have an impact on the viscosity of CSP filler PP copolymer. The results in Figure 3 indicate that 3 min dwell time in the barrel of an injection molding machine at 210 °C would thermally degrade 0.75 wt% of CSP (0.225 wt% of composite) while 2.5 wt% of CSP (0.75 wt% of composite) would degrade in 10 min. The results in Figure 11 indicate that increasing thermal degradation does reduce viscosity, though not dramatically.

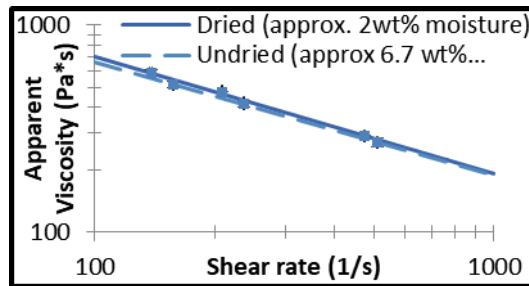


Fig. 10. Effect of moisture on rheology with 20 % CSP loading at 180 °C

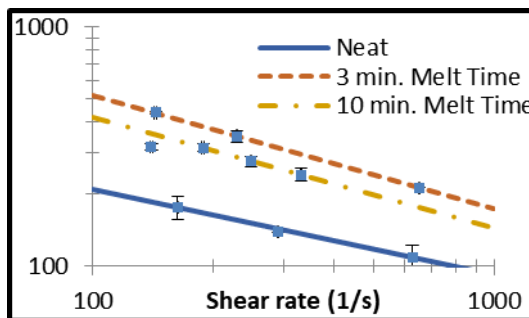


Fig. 11. Effect on viscosity of thermal degradation of 30 wt% CSP filled PP copolymer at 210 °C.

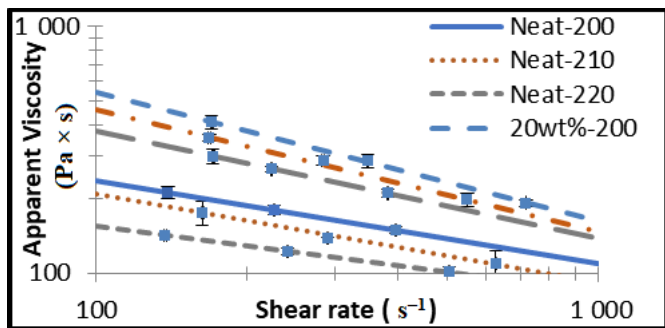


Fig. 12. The apparent viscosity vs shear rate for neat PP copolymer and filled with 20 wt% CSP.

Finally, the viscosity as a function of shear rate for neat and CSP filled (20 wt%) PP copolymer at three different temperatures is presented in Figure 12. The behavior at each temperature shows only a modest ~2 times increase in viscosity due to the addition of the 20 wt% CSP filler.

5. Summary

The processing characteristics of coconut shell powder used as function filler in polypropylene are very attractive. The following specific characteristics were established in this study.

- i. Coconut shell powder is high in lignin compared to most natural fillers, which gives it a higher thermal degradation temperature than most natural fillers.
- ii. Coconut shell powder filled polypropylene copolymer used in this study (and presumably in most polypropylenes) should compound and injection mold without thermal degradation issues.
- iii. Coconut shell powder used as a function filler in polypropylene copolymer serves as a spherulite nucleating agent, increasing the temperature at which crystalline begins (by reducing the required super cooling need for nucleation) and increasing the wt% crystallization. It presumably decreases the spherulites size, which would account for the good retention of Izod impact properties, though this was not directly confirmed by microscopy.
- iv. Coconut shell powder is an excellent function filler due to its relatively low viscosities in the shear-thinning region, even at higher loading levels. This allows the CSP composite to be processed easily. Furthermore, very small amounts of thermal degradation of the CSP give a modest decrease in viscosity, behaving like an internal processing aid in the polypropylene.
- v. The excellent combination of properties of coconut shell powder as a functional filler in polypropylene copolymer explain why CSP has been give “superior marks” by a wide variety of compounders and injection molders in industry who have used it with polypropylene or polypropylene copolymers.

Coconut shell powder is a very attractive functional filler for polypropylene because it provides a unique combination of increased flexural modulus and Izod impact strength with superior process-ability.

Acknowledgments

This work was done under the auspices of Natural Composites Inc. who also provided financial support for the project and supplied the polypropylene copolymer, coconut shell powder, and MAPP. The SEM picture in Figure 9 was selected from a larger group of SEM pictures taken by Sarah Stair. Updating references was assisted by Benny Putra Utomo

References

1. E.G. Teipel, S. Conroy, M. Kirby, W. Bradley. *Natural functional fillers from agricultural waste to reinforce polymeric composites: coconut shell powder technology* Paper presented in SPE Polyolefin Conference, (Houston, Texas, 2012). https://www.researchgate.net/publication/286214575_Natural_functional_fillers_from_agricultural_waste_to_reinforce_polymeric_composites_Coconut_shell_powder_technology
2. I.M. Ward, J. Sweeney. *An introduction to the mechanical properties of solid polymers*. England: John Wiley & Sons Inc. (2004). pp. 104–107. <https://www.wiley.com/en-id/An+Introduction+to+the+Mechanical+Properties+of+Solid+Polymers,+2nd+Edition-p-9780471496267>
3. H. Yang, R. Yan, H. Chen, D.H. Lee, C. Zheng. *Fuel*, **86**,12-13:1781–1788 (2007). <https://www.sciencedirect.com/science/article/pii/S001623610600490X>
4. D.L. Motoc, S.F. Bou, A.P. Pop. *MATEC Web of Conferences*, **184**,11:01016 (2018). https://www.researchgate.net/publication/326712780_Thermal_degradation_and_stability_of_wood_particle_composites_deployed_as_decorative_components
5. N. Stevulova, A. Estokova, J. Cigasova, I. Schwarzova, F. Kacik, A. Geffert. *Journal of Thermal Analysis and Calorimetry*, **128**,3:1649–1660 (2016). <https://link.springer.com/article/10.1007/s10973-016-6044-z>
6. J.S. Macedo, L. Otubo, O.P. Ferreira, I.F. Gimenez, I.O. Mazali, L.S. Barreto. *Microporous and Mesoporous Materials*, **107**,3:276–285(2008). <https://www.sciencedirect.com/science/article/abs/pii/S138718110700176X>
7. G.W. Ehrenstein. *Polymeric composites*. Munich: Hanser (2001), pp. 63–92.
8. S.C. Koay, M.Y. Chan, M.M. Pang, K.Y. Tshai. *Advances in Polymer Technology*, **37**,6: 2246–2252 (2018). <https://onlinelibrary.wiley.com/doi/full/10.1002/adv.21883>
9. A.V. Shenoy, D.R. Saini. *Thermoplastic melt rheology and processing*. New York: CRC Press (1996). pp. 115–172. <https://books.google.co.id/books?id=lksD1Mq5twIC&dq=thermoplastic+melt+rheology+and+processing&hl=en&sa=X&ved=0ahUKEwiUi-yEhuThAhWz7HMBHfooDlcQ6AEIKjAA>
10. S. Conroy. *The efficacy of using coconut shell powder as a filler/reinforcement in thermoplastic composites*. Master's Thesis, Baylor University, Waco, Texas (2011).
11. J.T. Uan-Zo-li. *Morphology, crystallization and melting behavior of propylene-ethylene statistical copolymer*. [Dissertation Ph.D.]. Virginia Polytechnic Institute and State University, Blacksburgm Virginia (2005). <https://vtechworks.lib.vt.edu/handle/10919/29143>

