



VOLUME 43, NUMBER 3, 2009
SPECIAL ISSUE

ARCHITECTURAL SCIENCE REVIEW

Special Issue: The virtual and the physical. Between the representation of space and the making of space

GUEST EDITOR
BENJAMIN A. SPAETH



Editorial

Place, time and architecture: the growth of new traditions

Sue Roaf & Gráinne McGill

Pages: 267-271

Published online: 27 Jul 2018

[First Page Preview](#)|[Full Text](#)|[References](#)|

PDF (495 KB)

|

3083Views

0CrossRef citations

0Altmetric

Place-Time for Buildings and Cities

Article

Standards? Whose standards?

Noel Cass & Elizabeth Shove

Pages: 272-279

Published online: 27 Jul 2018

[Abstract](#)|[Full Text](#)|[References](#)|

PDF (920 KB)

|

1027Views

1CrossRef citations

4Altmetric

Article

Building performance and end-user interaction in passive solar and low energy housing developments in Scotland

Tim Sharpe, Gráinne McGill, Rosalie Menon & Paul Farren

Pages: 280-291

Published online: 27 Jul 2018

[Abstract](#)|[Full Text](#)|[References](#)|

[PDF \(3236 KB\)](#)

265Views

0CrossRef citations

0Altmetric

Article

Energy sufficiency in buildings, a synonym for passive and low energy architecture (PLEA)

Hugo Santos, Pouya Samani & Eduardo de Oliveira Fernandes

Pages: 292-297

Published online: 10 Aug 2018

[Abstract](#)|[Full Text](#)|[References](#)|

[PDF \(1050 KB\)](#)

187Views

0CrossRef citations

0Altmetric

Article

Social-Ecological-Technical systems in urban planning for a circular economy: an opportunity for horizontal integration

Janneke van der Leer, Arjan van Timmeren & Alexander Wandl

Pages: 298-304

Published online: 31 Aug 2018

[Abstract](#)|[Full Text](#)|[References](#)|

[PDF \(1318 KB\)](#)

654Views

0CrossRef citations

1Altmetric

Article

Designing housing decision-support tools for resilient older people

Bev Lorraine James & Kay Saville-Smith

Pages: 305-312

Published online: 02 Aug 2018

[Abstract](#)|[Full Text](#)|[References](#)|

[PDF \(869 KB\)](#)

283Views

1CrossRef citations

3Altmetric

Article

Thriving in the slums: progressive development and empowerment of the urban poor to achieve secure tenure in the Philippines

Isidoro Malaque III, Katharine Bartsch & Peter Scriver

Pages: 313-318

Published online: 27 Jul 2018

[Abstract](#)|[Full Text](#)|[References](#)|

[PDF \(707 KB\)](#)

327Views

0CrossRef citations

0Altmetric

Article

Evaluation of the social dimension of sustainability in the built environment in poor rural areas of China

Li Wan & Edward Ng

Pages: 319-326

Published online: 03 Aug 2018

[Abstract](#)|[Full Text](#)|[References](#)|

PDF (1301 KB)

180Views

0CrossRef citations

0Altmetric

Article

Refugee housing through cyclic design

Daniel Fosas, Dima Albadra, Sukumar Natarajan & David A. Coley

Pages: 327-337

Published online: 27 Jul 2018

[Abstract](#)|[Full Text](#)|[References](#)|

PDF (3023 KB)

378Views

1CrossRef citations

1Altmetric

Article

Open windows for natural airflow and environmental noise reduction

Christina E. Mediastika, Luciana Kristanto, Juliana Anggono, Fefen Suhedi & Hariyati Purwaningsih

Pages: 338-348

Published online: 27 Jul 2018

[Abstract](#)|[Full Text](#)|[References](#)|

PDF (2420 KB)

132Views

0CrossRef citations

0Altmetric

Article

Design *with* voids: how inverted urbanism can increase urban resilience

Rob Roggema

Pages: 349-357

Published online: 27 Jul 2018

[Abstract](#)|[Full Text](#)|[References](#)|

[PDF \(2222 KB\)](#)

280Views

0CrossRef citations

0Altmetric

Article

The role of building operational emulation in realizing a resilient built environment

Joe Clarke

Pages: 358-361

Published online: 30 Jul 2018

[Abstract](#)|[Full Text](#)|[References](#)|

[PDF \(816 KB\)](#)

95Views

1CrossRef citations

0Altmetric

Article

The mobility revolution as seen through Norwegian eyes

Harald Nils Røstvik

Pages: 362-366

Published online: 24 Jul 2018

[Abstract](#)|[Full Text](#)|[References](#)|

[PDF \(1175 KB\)](#)

93Views
0CrossRef citations
0Altmetric

**Publish with us**
Submit an article ▼


About this journal ▼

Explore
Browse all articles & issues ▼ Latest issue**Subscribe**
Alerts & RSS feed ▼

+ Purchase a subscription

Ready to submit?

Start a new manuscript submission
or continue a submission in
progress

[Go to submission site](#) **Submission information**[► Instructions for authors](#)[► Editorial policies](#) **Editing services**[► Editing services site](#) **About this journal**[► Journal metrics](#)[► Aims & scope](#)[► Journal information](#)[► Editorial board](#)[► News & call for papers](#)[► Advertising information](#)

Editorial board

Editor in Chief

Professor Darren Robinson
University of Sheffield, UK

Former Editors in Chief**Professor Richard Hyde**

Professor of Architectural Science (retired)
The University of Sydney, Australia

Professor Gary Moore

Emeritus Professor of Environment-Behaviour Studies
The University of Sydney, Australia

Founding Editor**Professor Henry Cowan**

Late Emeritus Professor of Architectural Science
The University of Sydney, Australia

Associate Editors**Professor George Baird**

(Building Performance)
Victoria University of Wellington, New Zealand

Dr David Behar

(Daylighting)
Technion-Israel Institute of Technology, Israel

Prof-Dr Zbigniew Bromberek

(Building Performance: Thermal Comfort)
Poznan University of Technology, Poland




Publish with us

[Submit an article ▼](#)

[About this journal ▼](#)

Explore

[Browse all articles & issues ▼](#)

 **Latest issue**

Subscribe

[Alerts & RSS feed ▼](#)

[+ Purchase a subscription](#)

Prof-Dr Zbigniew Bromberek

(Building Performance: Thermal Comfort)

Poznan University of Technology, Poland

Associate Professor Densil Cabrera

(Audio and Acoustics)

The University of Sydney, Australia

Dr Paula Cadima

(Environmental Design)

Architectural Association, UK

Associate Professor Christhina Candido

(Post-Occupancy Evaluation and Indoor Environmental Quality)

Melbourne School of Design, Australia

Professor Michael Christenson

(Architectural Computing)

University of Minnesota, USA

Associate Professor Robert Crawford

(Life Cycle Assessment)

Melbourne School of Design, Australia

Professor Francesco Fiorito

(Facade Engineering)

Polytechnic University of Bari, Italy

Professor Brian Ford

(Bioclimatic Architecture)

University of Nottingham, UK

Dr Veronica Garcia-Hansen

(Daylighting)

Queensland University of Technology, Australia

Professor Francois Garde

(Environmental Design, Low/Net Zero Energy Buildings)

University of La Reunion, Reunion Island, France

Dr Hilaire Graham

(Education)

University for the Creative Arts, Farnham, UK



Publish with us

[Submit an article ▼](#)

[About this journal ▼](#)

Explore

[Browse all articles & issues ▼](#)

 [Latest issue](#)

Subscribe

[Alerts & RSS feed ▼](#)

[+ Purchase a subscription](#)

Associate Professor Yasha J. Grobman

(Computer Aided Fabrication, Design Computation)

Technion-Israel Institute of Technology, Israel

Professor Ning Gu

(Design Computing and Cognition)

University of South Australia, Australia

Dr David Gunaratnam

(Structures)

The University of Sydney, Australia

Dr Edward Harkness

(Solar Geometry)

The University of Sydney, Australia

Professor Gordon Holden

(Urban Design)

Griffith University, Queensland, Australia

Professor Justin B. Hollander

(Cognitive Architecture and Urban Design)

Tufts University, USA

Dr. Marcel Ignatius

(Urban Heat Island)

National University of Singapore, Singapore

Dr Wassim Jabi

(Design computing)

Welsh School of Architecture, UK

Emeritus Professor Warren Julian

(Environmental Sciences)

The University of Sydney, Australia

Dr Steve Kardinal Jusuf

(Urban Heat Island)

National University of Singapore, Singapore

Professor Pablo La Roche

(Sustainable Design)

California Polytechnic, California, USA




Publish with us

[Submit an article ▼](#)

[About this journal ▼](#)

Explore

[Browse all articles & issues ▼](#)

 **Latest issue**

Subscribe

[Alerts & RSS feed ▼](#)

[+ Purchase a subscription](#)

Dr Estelle Lazer

(Archaeological Science)

The University of Sydney, Australia

Associate Professor Danny H W Li

(Energy Efficiency)

Department of Building and Construction

City University of Hong Kong, Hong Kong

Associate Professor Mark Luther

(Building science)

Deakin University, Australia

Professor Alexi Marmot

(Facilities Management)

University College London, UK

Associate Professor William Martens

(Audio and Acoustics)

The University of Sydney, Australia

Dr Gráinne McGill

(Building Performance, indoor air quality and ventilation)

Mackintosh Environmental Architecture Research Unit

Glasgow School of Art, UK

Dr Alexander Molodin

(Vernacular architecture)

Novosibirsk State University of Architecture and Civil Engineering (Sibstrin), Russia

Professor Edward Ng

(Urban Climatology)

Chinese University of Hong Kong, Hong Kong

Professor Indrika Rajapaksha

(Healthy buildings)

University of Moratuwa, Sri Lanka

Dr Upendra Rajapaksha

(Low energy architecture)

University of Moratuwa, Sri Lanka

Professor Susan Roaf

(Sustainability)

Heriot-Watt University, Edinburgh, UK




Publish with us

[Submit an article ▼](#)

[About this journal ▼](#)

Explore

[Browse all articles & issues ▼](#)

 **Latest issue**

Subscribe

[Alerts & RSS feed ▼](#)

[+ Purchase a subscription](#)

Professor Marc E Schiler

(Environmental Controls)

University of Southern California, USA

Professor Marc Aurel Schnabel

(Parametric Design)

Victoria University of Wellington, Wellington, New Zealand

Dr Henry Skates

(Sustainable Design)

The School of Environment, Griffith University, Australia

Dr A. Benjamin Spaeth

(Parametric design)

Welsh School of Architecture, UK

Dr Peter R. Smith

(Building Sciences and Technology)

The University of Sydney, Australia

Professor Veronica I. Soebarto

(Sustainable building design)

The University of Adelaide, Australia

Dr Marcella Ucci

(Facilities Management)

Bartlett School of Graduate Studies, University College London, UK

Dr David Wadley

(Planning and Urbanism)

The University of Queensland, Australia

Book Review Editor

Diego Arroyo

Pontificia Universidad Católica de Chile and the University of Sydney, Australia

Editorial Assistant

Sue MacLeod

Editorial Advisory Board

Dr Mohamed **Abdel-Kader**, Department of Architecture, Planning and Urban Economics, Cairo University, Egypt

Professor Mir M **Ali**, Structures Division, School of Architecture, University of Illinois at Urbana-Champaign, USA

Dr Richard M **Aynsley**, Research and Development, Delta T Corporation, Brisbane, Australia

Professor Guedi **Capeluto**, Faculty of Architecture and Town Planning Technion, Israel Institute of Technology,

... ..



Publish with us

[Submit an article ▼](#)

[About this journal ▼](#)

Explore

[Browse all articles & issues ▼](#)

 [Latest issue](#)

Subscribe

[Alerts & RSS feed ▼](#)

[+ Purchase a subscription](#)

Israel

Professor **Chew** Lit Yin, School of Design, National University of Singapore, Singapore

Professor W K **Chow**, Department of Building Services Engineering, Hong Kong Polytechnic University, China

Professor Michael **Christenson**, Department of Architecture and Landscape Architecture, North Dakota State University, USA

Professor Arza **Churchman**, Faculty of Architecture and Town Planning, Technion Institute of Technology, Israel

Dr Marjanna **de Jong**, School of Teacher Education, Malmö University, Sweden

Professor Gary **Evans**, Department of Design and Environmental Analysis, Cornell University, USA

Assistant Professor Hua **Ge**, Faculty of Engineering, Architecture and Science, Ryerson University, Toronto, Canada

Professor Robert **Gifford**, School of Environmental Studies, University of Victoria, Canada

Professor Santiago **Huerta**, Department of Construction, Technical University of Madrid, Spain

Dr Kathryn **Janda**, Energy Institute, University College London and Environmental Change Institute, University of Oxford

Dr J Derrick **Kendrick**, School of Architecture, The University of Adelaide, Australia

Professor Ken-ichi **Kimura**, International Research Institute on Human Environment, Tokyo, Japan

Professor Ross **King**, Faculty of Architecture, Building and Planning, University of Melbourne, Australia

Dr Richard **Kittler**, Institute of Construction and Architecture, Slovak Academy of Science, Slovakia

Dr J C **Lam**, Department of Building and Construction, City University of Hong Kong, China

Professor Roderick J **Lawrence**, Faculty of Social and Economic Sciences, University of Geneva, Switzerland

Professor Li Bin, College of Architecture and Urban Planning, Tongji University, China

Associate Professor Florence Yean Yng **Ling**, Department of Building, National University of Singapore, Singapore

Associate Professor Mark Brandt **Luther**, School of Architecture and Building, Deakin University, Australia

Professor Jack L **Nasar**, Department of City and Regional Planning, Ohio State University, USA

Professor Douglas **Noble**, Leavitt Graduate Building Science Program, University of Southern California, USA

Professor Bülent **Özgüç**, Faculty of Art, Design and Architecture, Bilkent University, Turkey

Professor Emeritus Adrian **Page**, Faculty of Engineering and the Built Environment, University of Newcastle, Australia

Professor Deo **Prasad**, Faculty of the Built Environment, University of New South Wales, Australia

Professor Antony D **Radford**, School of Architecture, University of Adelaide, Australia

Professor Helen **Ross**, School of Natural and Rural Systems Management, University of Queensland, Australia

Professor Stephen **Sharples**, Environmental Design and Sustainability, University of Sheffield, England

Professor Edna **Shaviv**, Climate and Energy Laboratory, Technion Israel Institute of Technology, Israel

Professor Koen **Steeners**, Martin Centre for Urban Studies, University of Cambridge, England

Professor Bin **Su**, School of Architecture, Unitec Institute of Technology, New Zealand

Professor C M **Tam**, Department of Building and Construction, City University of Hong Kong, China

Dr Ruffina **Thilakarathne**, Chu Hai College of Higher Education, China

Professor Emeritus Peter R **Tregenza**, Department of Architecture, University of Sheffield, England

Professor Brenda **Vale**, School of Architecture, Victoria University, New Zealand

Dr Jennifer **Veitch**, Institute for Research in Construction, National Research Council of Canada, Ottawa, Canada

Professor Jacqueline **Vischer**, Faculty of Environmental Design, University of Montreal, Canada

Professor Andreas **Wagner**, Karlsruhe Institute of Technology, Germany

Professor Jason **Weiss**, School of Civil Engineering, Purdue University, USA

Associate Professor Terence **Williamson**, School Architecture, University of Adelaide, Australia

Prof-Dr Stephen **Wittkopf** Lucerne University of Applied Sciences and Arts, Switzerland

Associate Professor **Xu** Leiqing, College of Architecture and Planning, Tongji University, China

Dr Semiha **Yilmazer**, Department of Interior Architecture and Environmental Design, Bilkent University, Turkey

Professor **Zeng** Saixing, Antai School of Management, Shanghai Jiao Tong University, China

Source details

Feedback > Compare sources >

Architectural Science Review

Scopus coverage years: from 1958 to Present

Publisher: Taylor & Francis

ISSN: 0003-8628 E-ISSN: 1758-9622

Subject area: Engineering Architecture

Source type: Journal

[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Source Homepage](#)

CiteScore 2021

4.5

SJR 2021

0.682

SNIP 2021

1.109

CiteScore CiteScore rank & trend Scopus content coverage

Improved CiteScore methodology

CiteScore 2021 counts the citations received in 2018-2021 to articles, reviews, conference papers, book chapters and data papers published in 2018-2021, and divides this by the number of publications published in 2018-2021. [Learn more >](#)

CiteScore 2021

4.5 - 734 Citations 2018 - 2021
162 Documents 2018 - 2021

Calculated on 05 May, 2022

CiteScoreTracker 2022

4.6 - 599 Citations to date
130 Documents to date

Last updated on 04 June, 2022 - Updated monthly

CiteScore rank 2021

Category	Rank	Percentile
Engineering		
Architecture	#10/149	93rd

[View CiteScore methodology >](#)

[CiteScore FAQ >](#)

[Add CiteScore to your site >](#)

About Scopus

[What is Scopus](#)

Language

[日本語版を表示する](#)

Customer Service

[Help](#)

Would you help us improve Scopus?

It will take just a few minutes.

[Maybe later](#)

[Share your thoughts](#)



Architectural Science Review

ISSN: 0003-8628 (Print) 1758-9622 (Online) Journal homepage: <http://www.tandfonline.com/loi/tasr20>

Open windows for natural airflow and environmental noise reduction

Christina E. Mediastika, Luciana Kristanto, Juliana Anggono, Fefen Suhedi & Hariyati Purwaningsih

To cite this article: Christina E. Mediastika, Luciana Kristanto, Juliana Anggono, Fefen Suhedi & Hariyati Purwaningsih (2018) Open windows for natural airflow and environmental noise reduction, Architectural Science Review, 61:5, 338-348, DOI: [10.1080/00038628.2018.1502151](https://doi.org/10.1080/00038628.2018.1502151)

To link to this article: <https://doi.org/10.1080/00038628.2018.1502151>



Published online: 27 Jul 2018.



Submit your article to this journal [↗](#)



Article views: 21



View Crossmark data [↗](#)



Open windows for natural airflow and environmental noise reduction

Christina E. Mediastika^a, Luciana Kristanto^a, Juliana Anggono^b, Fefen Suhedi^c and Hariyati Purwaningsih^d

^aDepartment of Architecture, Petra Christian University, Surabaya, Indonesia; ^bDepartment of Mechanical Engineering, Petra Christian University, Surabaya, Indonesia; ^cResearch and Development Centre for Housing and Settlement, Ministry of Public Works and Housing, Bandung, Indonesia;

^dDepartment of Material Engineering, Institut Teknologi Sepuluh Nopember, Surabaya, Indonesia

ABSTRACT

For buildings in tropical climates, the use of open windows for natural ventilation can not only provide low cost and low energy comfort but also provide thermal delight for occupants. However open windows let in environmental noise. The size and location of windows in walls are key but this study set out to determine whether there are any window forms that can effectively reduce the level of sound ingress into a building. A top-hung window was chosen for this study looking at the dimensions of the window opening and its orientation in relation to the environmental noise source. The top-hung form was selected for its potential to balance the functions of allowing airflow while potentially blocking and reducing noise levels with its window pane angle. The window pane was tested in a laboratory at three opening angles: 0° (closed), 5°, and 10° to let the outdoor air in. The angles were also tested in three different orientations in relation to the noise source position: perpendicular, sideways 60°, and sideways 90°. The test was conducted at 1/3 octave band frequency as specified by ASTM E90-09 to obtain the transmission loss, then ASTM E1332-90 was referred to calculate the outdoor-indoor transmission class (OITC) of the specimens. The study revealed that window orientation and extent of the openings and window pane angle have little effect on noise reduction. The paper concludes with a discussion of how higher levels of natural ventilation can be achieved, particularly in noisy urban areas. The top-hung window, once open, barely blocks environmental noise. However, when the window was closed, the perpendicular orientation offered more noise reduction when compared windows placed sideways to the noise source. The adjustable pane-angle of a top-hung window placed perpendicular to the airflow, and thus the noise source, seemed to have the most potential to balance the functions of allowing airflow when opened and reducing significant noise when closed. Nonetheless, an open window that through its design alone can significantly reduce the ingress of ambient noise into a building is still an issue.

ARTICLE HISTORY

Received 4 July 2018
Accepted 14 July 2018

KEYWORDS

Natural airflow; top-hung window; environmental noise reduction; outdoor-indoor transmission class

SUBJECT CLASSIFICATION CODES

Buildings

1. Introduction

The most dominant environmental noise source for buildings alongside streets and roads is traffic noise which is increasing in many places (Ali and Tamura 2003; Alberola, Flindell, and Bullmore 2005). In Indonesia, where this study was done, the mean traffic noise level beside built-up roads typically reaches up to 75 dB (Husti and Fujimoto 2012), with additional excessive noise levels from vehicular horns reaching over 90 dB (Husti and Ramli 2013). Nuisance from outdoor noise makes the use of opening windows less attractive and in some areas almost impossible. Building occupants, where they can afford to, tend to close windows and turn on air conditioning.

The noise issue aside there are many benefits in using an open window to provide natural airflow in the tropics needed for comfort and to prevent the build-up of mould arising from conditions where there are little air-movement and high levels of humidity, for instance behind and inside cupboards. Even small open window areas, such as provided by a single side-hung window stimulating low airflow was found to be capable of introducing useful levels of fresh air inside a building by Guohui (2000).

An open window is a key building feature in terms of its ability to contribute to comfort cooling indoors (Rijal et al. 2007) and a range of studies have shown that air movement from windows also positively influences the health of building occupants (Mangkuto, Rohmah, and Asri 2016; Vincent et al. 1997; Jaakkola and Miettinen 1995; Anon 1995).

Buildings in tropical regions have a particular imperative for the use of natural ventilation for comfort cooling as the outdoor temperatures often correlate well with indoor comfort temperatures with the assistance of a little air movement. In terms of the development of low energy and low carbon buildings in tropical zones, the longer a building can be run over a day or year using just natural ventilation for comfort cooling over a year the less energy it will use. This is an increasingly critical issue with the rise in the cost of energy in many regions, the decreasing value of the salaries of many in flat lining global economies and the rise in levels of fuel poverty in both the developed and developing nations (Roaf and Nicol 2017).

An open window that allows natural airflow and conquers noise intrusion all at once is a complicated issue, involving not

only sound and smells but also the ingress of pollution from the traffic itself (Mediastika 1999). Insertion of openings on a wall inevitably reduces the sound insulation properties of the wall (Lord and Templeton 1996; De Salis, Oldham, and Sharples 2002). The use of thin materials inserted into a wall, such as with a glass window decreases the sound insulation property of the masonry accordingly (Quirt 1981, 1982; Garg, Sharma, and Maji 2011). Opening the window in the envelope then exacerbates the level of the sound intrusion indoors (De Salis, Oldham, and Sharples 2002; Sharland 1979).

Research on different ways of controlling noise intrusion resulting from natural ventilation systems is limited, although some work on the subject has been done by Jorro (1990), Peliza (1994), Irvine (1993), Field and Fricke (1995, 1997), Mohajeri and Fricke (1995, 1996), Kwon and Park (2013), and Yu et al. (2017). None of these studies specifically investigate the effect of the actual design of the opening windows on environmental noise

reduction as a positive passive strategy for encouraging natural air flows through buildings while reducing noise nuisance from them. Those studies concentrated largely on the use of active noise control for open windows, an example of which is shown in Figure 1, in which significant noise spectrum attenuation was gained using quarter wave resonators.

Other studies investigated the use of effective methods for achieving both airflow and noise reduction indoors by locating the building in an area of low noise concentration, by the application of noise screening using internal or external barriers (Alberola, Flindell, and Bullmore 2005; Twinn 1994), by using acoustic ceiling design to absorb outdoor noise intrusion (Buratti 2002, 2006) and by using partially open double layered windows (Ford and Kerry 1973) (Figure 2). The opening configurations of these previous studies were not of widely or fully adjustable open window types. Thus, none allowed sufficient outdoor air movement through them to compromise indoor comfort resulting from the high daily outdoor temperatures (Karyono 2000; Feriadi and Wong 2004). Two other studies suggested placing the open aperture on a wall facing away from direct noise paths (Twinn 1994; Bunn 1993), a strategy also discussed below in this paper. No previous studies have reported on the use of a fully opening window that through its design alone can significantly reduce the ingress of ambient noise into a building. Previous work demonstrates that a fully open window has little potential to reduce environmental noise. However, given the imperative for natural ventilation in the future of passive cooling in buildings in the tropics, it was felt that an attempt to produce an opening window able to significantly reduce noise ingress through the merits of its design alone was warranted and it is on this attempt that the paper below reports.

This paper focuses on the investigation of a potentiality of using a specific window type that gives access to building occupants to open or close it to suit their needs of natural airflow. The openable window referred in this study is a fully openable window designed to enable natural airflow. The term 'fully' is used to distinguish it from a partially open double layered window as was by Ford and Kerry (1973) (Figure 2) or as typically used in Indonesia (Figure 3) or other fixed open window types which cannot be adjusted by the users to suit their need of fresh air. In a warm-humid tropical climate, an adequate passive cooling system using open windows is suggested to require an open area of at least 5% of the ventilated floor area (Mediastika 1999; SNI 2001). As an example, a 15 m² floor area will need 0.75 m² of

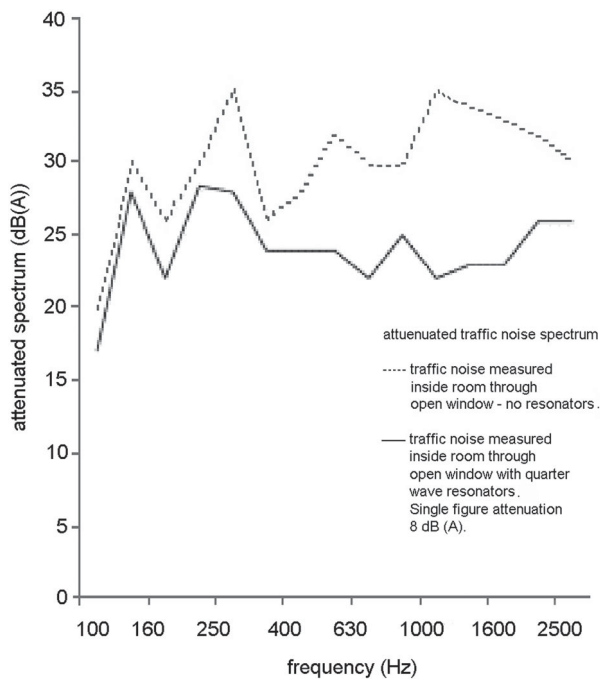


Figure 1. The calculated attenuation effect of the prototype set of quarter wave resonators around a test window exposed to the noise of a medium-sized passenger vehicle drive-by (Field and Fricke 1995, 1997).

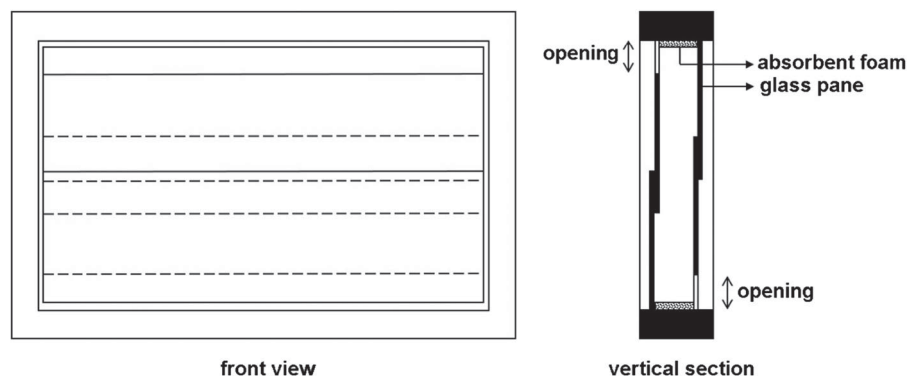


Figure 2. Schematic view of the 'non-fully adjustable opening window' constructed from double glass panes (reproduced after Ford and Kerry 1973).

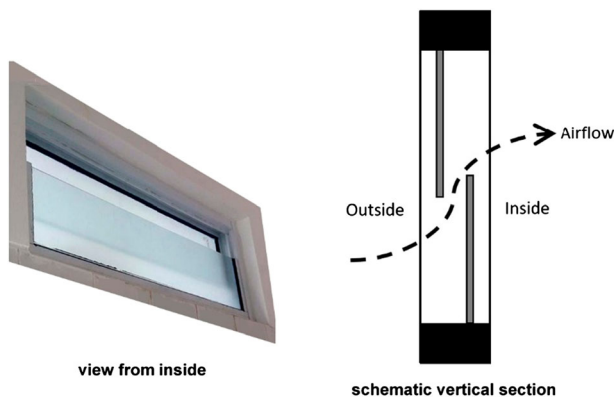


Figure 3. A typical fixed open glass window used in Indonesia, usually for bathrooms or other small rooms.

openable window. Using a partially open doubled glazed window with a maximum gap of 0.2 m as was posited by Ford and Kerry (1973) and Buratti (2002, 2006), the room needs a window as large as 3.75 m² minimum or 25% of the floor area. De Salis, Oldham, and Sharples (2002) found that 10% of a fully adjusted open window in such a wall area could only provide 10 dB of sound insulation. Fully adjusted open windows are currently deemed incapable of supplying both natural airflow and outdoor noise reduction at the same time. Figure 4 shows that until now no open window configuration exists in the chart that offers the possibility of noise reduction over all frequencies, so the challenge here was to construct a window capable of providing some noise reduction while the window was fully opened.

The placing of the aperture away from direct noise paths as explored by Twinn (1994) and Bunn (1993) is often impractical for buildings on small sites, the optimization of the orientation of an open aperture in the path of the noise was considered more practical. A top-hung style window was selected as possibly offering higher noise blocking potential due to the angle of its window pane position. Gao and Lee (2010) had determined

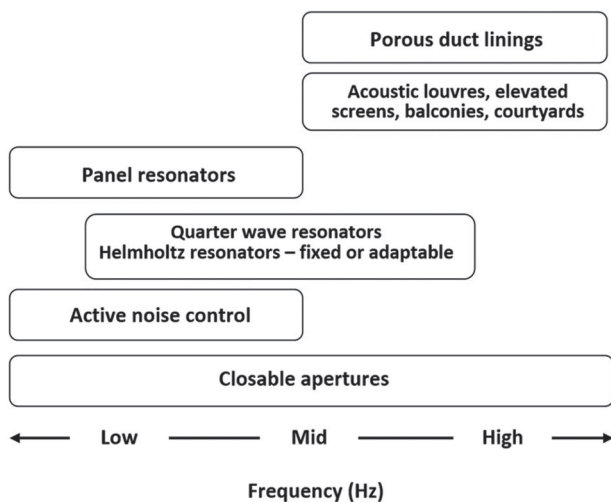


Figure 4. Frequency ranges of useful attenuation for noise control treatments of low flow resistance for use in inlets or outlets of natural ventilation systems (De Salis et al. 2002).

that a top-hung window performed the worst in terms of natural ventilation compared to end-slider and side-hung window. The lower ventilation rate for the top-hung window was caused by the pane angle that directly faced and blocked the airflow. Nonetheless, despite its poor performance in terms of natural airflow, a top-hung window is capable of supplying more airflow (Moore 1993; Coley 2008). An open top-hung window gives access to the users to adjust the opening levels to suit their needs compared to a fixed open window (Figure 4) or a closed window with trickle ventilators. A top-hung window, as produced in Indonesia, has typical opening levels distances of 10 cm to 30 cm letting in airflows 75% of the incoming air that hits the pane, and the rest 25% is blocked by the pane and the frame (Moore 1993). This is less than the end-slider or side-hung that allow 90% airflow of the incoming air (Moore 1993). A bottom-hung window pane position was not tested because it is rarely used in Indonesia due to less accessible handle and latch locations.

2. Previous work

Previously the research team had looked at the possibility of using a bespoke glass window design within an optimized framing material for that glass for tropical climates to let airflow and conquer environmental noise using a particular warm temperature. This work was conducted in a laboratory to test models at a 1:1 scale consisting of three glass types commonly used in Indonesia i.e. monolithic, laminated and tempered in three different window framing materials, timber, aluminium and unplasticized polyvinyl chloride (uPVC).

All these tests were conducted twice at temperatures specified according to the ASTM E90-09 (ASTM 2009) standard, and at the warmer temperature of 32°C, being around the daily average temperature experienced in the tropics during the hot season. The glasses were tested for their sound transmission class (STC) and outdoor indoor transmission class (OITC). The test exhibited laminated glass resulted in the best transmission loss (TL) contour and STC, but not of the OITC due to a coincidence dip at 125 Hz (Mediastika et al. 2015, 2016). The OITC of laminated glass used at a warmer temperature was not as good as that of the laminated glass used at the standard temperature possibly because of sound travels faster in the warmer air (Zitzewitz 2011), which at frequency 125 Hz resonates with the frequency of the laminated glass to cause a dip.

The framing material tests showed that all tested frames performed similarly to outdoor noise intrusion when the window pane was opened. But with the pane closed, the most effective frame in conquering environmental noise was the uPVC frame as it is completed with rubber strips and sealant providing good sound breaks within its construction (Mediastika et al. 2017).

3. Methodology

The current work was also conducted in a laboratory with 1:1 scale models. The transmission losses of different window orientations were tested in the laboratory as shown in Figures 5 and 6. A laboratory test set up with a diffuse incident sound field was deemed adequate to represent the ambient environmental noise since environmental noise enters a building from many directions. The environmental noise around buildings is

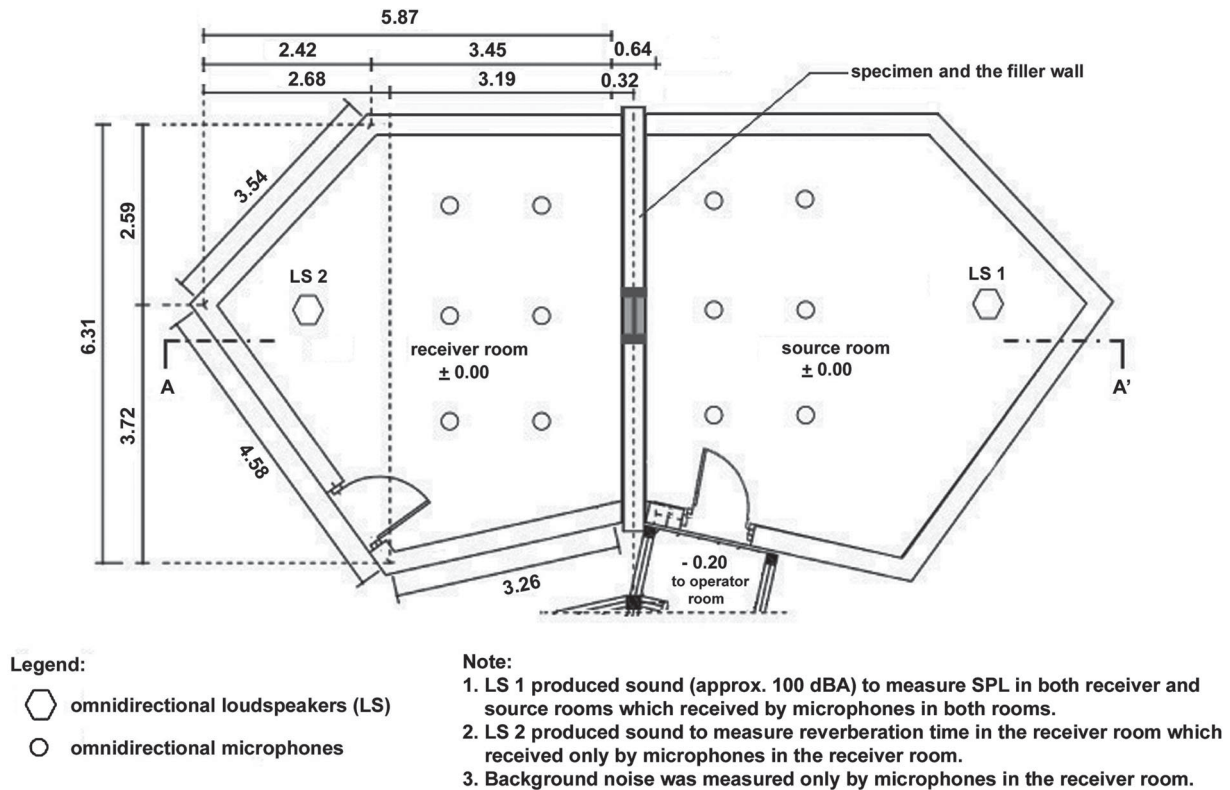


Figure 5. The plan of the testing rooms and the equipment layout.

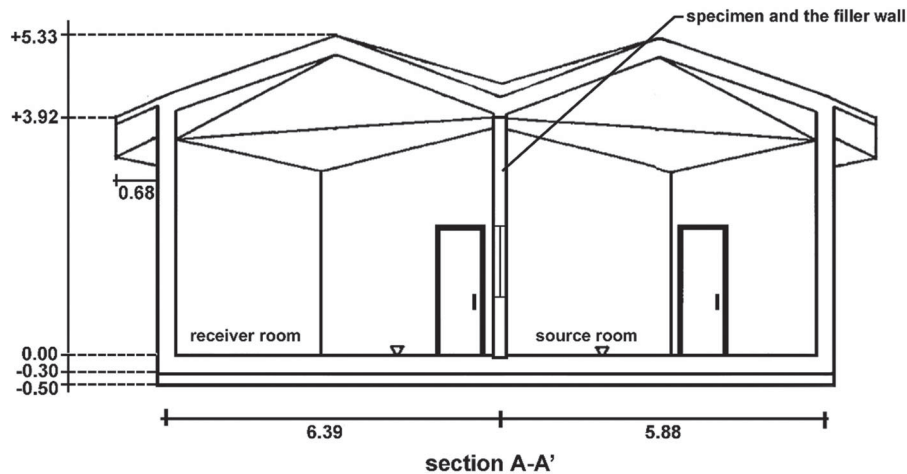


Figure 6. The A-A' section of the testing rooms.

produced by a mixture of outdoor noise sources that disperse directly mostly from traffic as the primary source and in turn are reflected on by outdoor objects, such as vegetation, fence, pillar, sculpture, etc. However, the indoor test unit was limited by the laboratory dimensions in its ability to accommodate long wavelength of low-frequency sound. With the linear dimension of 5.87 m \times 6.31 m and volume of source room being 135,07 m³ and the receiver room of 120,36 m³ the laboratory is sufficient to conduct a sound test of frequency as low as 80 Hz, for which the wavelength is around 4.25 m. According to ASTM E90-09 (ASTM 2009), the minimum source room volume is 125 m³. The frequency of 80 Hz was the lowest to be measured to calculate outdoor-indoor transmission class (OITC) used in this paper.

Six fixed microphones were used in each room as plotted in Figure 5. The sound pressure levels were measured in both directions of the flip source and receiver rooms to calculate transmission loss between the rooms due to the specimen insertion. The averaging time was 12 s with the background noise in the receiver room also being recorded (Table 1). The transmission loss of the masonry wall was recorded as the reference for the transmission loss of the specimen. This is plotted in Table 2. The sound absorption in the receiving room was measured with a Sabine formula based on the room reverberation time (RT). The RT was calculated with a pink-noise source in an interrupted noise method. It was measured in 3 positions; 10 times each. The Pulse Reflex Building Acoustic method by

Table 1. Transmission loss (TL) and outdoor-indoor transmission class (OITC) of the filler wall (full masonry wall before the openings insertion).

1/3 Octave band frequency (Hz)	Plain perpendicular wall	Sideways 60° wall	Sideways 90° wall
80	41	33	32
100	37	33	36
125	31	30	31
160	34	34	35
200	29	29	30
250	30	29	34
315	29	30	33
400	28	31	34
500	32	32	36
630	36	35	38
800	38	38	40
1000	41	42	43
1250	44	44	46
1600	47	46	48
2000	49	48	50
2500	51	50	50
3150	53	52	52
4000	55	53	54
OITC	34	34	37

Bruel & Kjaer Type 8780 was employed to correct and calculate the test.

The testing tool used was a Bruel & Kjaer 2- channel building acoustic system consisting of power amplifier type 2734 and 4292 omnidirectional loudspeakers as the sound source, 2 pieces of type 4189 omnidirectional microphones as the sound sensor, and 2-channel handheld analyzer type 2270 was included as the main instrument data processor. The microphones were

calibrated using Bruel & Kjaer calibrator type 4231. The temperature and relative humidity during the testing stages were plotted at 25°-26°C and 80% - 90% to conform ASTM E90-09 (ASTM 2009).

The models were placed in 3 different orientations to the main noise source, being perpendicular, sideways 60° and sideways 90° (Figures 7–9). The terminology of perpendicular is used here to describe the position of the window pane directly faced the main or the primary noise source. Meanwhile, the terminology of sideways is used to describe the position of window pane not directly faced the main noise source, either oblique 60° or 90°. The top-hung window was selected and the glass type, dimensions and framing materials were all fixed variables using monolithic glass types, 10 mm thickness, 800 mm × 1200 mm dimension, inserted within a uPVC frame (Figures 10 and 11).

The models were tested at 3 opening angles i.e. 0° (closed), 5°, and 10° (Figure 10) for each orientation assigned. The closed window was tested to study the effect of slit alongside the pane and the frame on noise intrusion due to the window orientation. In tropical climates, a slit between the pane and the frame is assigned for ease of use due to material expansion and shrinkage during the dry and wet season. The 10° angle (approximately 0.2 m opening width, Figure 11) was selected as the maximum opening level for reasons of safety and ease of use.

Window orientations of 0°, 60°, and 90° were selected based on a possible orientation used by architects and developers. The sideways orientation is usually selected to avoid direct solar radiation (Capeluto 2003). Angles of orientation smaller than 60° and

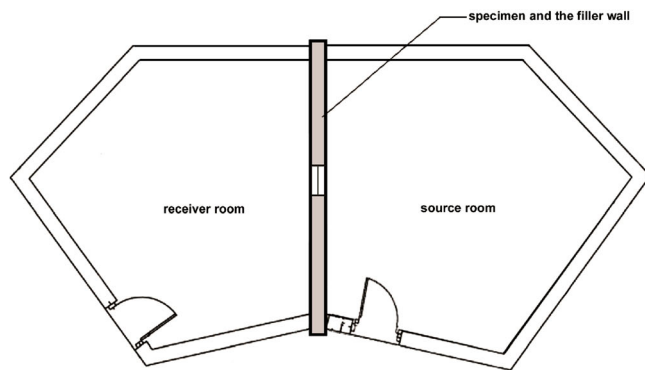
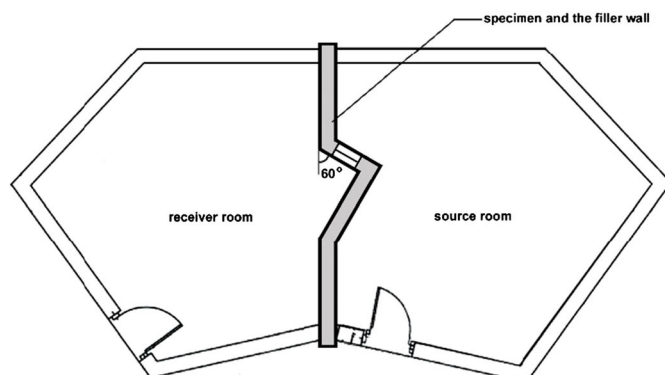
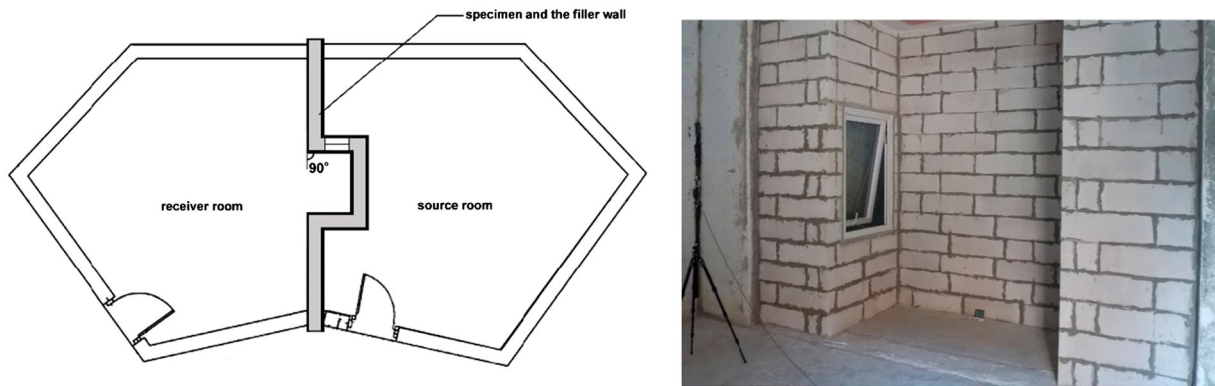
**Figure 7.** Specimen layout of the perpendicular orientation and view from the receiver room.**Figure 8.** Specimen layout of the sideways 60° orientation and view from the receiver room.

Table 2. Background noises (BN) and sound pressure levels (SPL) in the receiving room*.

1/3 Octave band frequency (Hz)	BN Plain perpendicular wall	SPL perpendicular	BN Sideways 60° wall	SPL sideways 60°	BN Sideways 90° wall	SPL sideways 90°
80	29.2	61.7	32.4	69.8	30.3	74.5
100	36.2	73.8	28.3	77.1	29.4	74.9
125	31.4	83.1	30.7	84.9	27.3	82.8
160	28.5	81.0	27.3	83.8	25.9	82.1
200	21.6	86.8	29.4	88.9	25.5	86.3
250	23.5	84.7	24.5	85.8	24.5	82.6
315	21.9	84.3	19.5	84.4	23.7	82.1
400	20.4	83.6	17.4	82.4	21.4	80.1
500	18.6	77.9	16.6	78.9	19.7	76.0
630	18.5	72.5	16.0	73.9	22.1	72.5
800	16.6	68.3	13.4	69.2	17.6	68.3
1000	14.5	63.4	11.5	64.4	16.7	63.3
1250	13.5	59.4	12.2	61.0	16.3	59.7
1600	9.9	57.5	8.9	59.2	13.9	57.5
2000	8.4	55.4	7.9	57.2	10.7	55.5
2500	15.5	51.7	10.7	54.1	12.8	53.8
3150	20.8	50.4	13.0	52.8	13.0	53.0
4000	21.9	47.1	12.9	49.9	11.7	49.4

*The measured SPL were all 10 dB above the background noise (BN) as specified by ASTM E90-09 (ASTM 2009).

**Figure 9.** Specimen layout of the sideways 90° orientation and view from the receiver room.

also between 60° and 90° were not tested due to its uncommon use resulting from its complicated construction.

In general, the transmission loss generated by the specimen is calculated as follows,


$$TL = L_S - L_R + 10 \log S/A_R \quad (1)$$

where: TL is transmission loss (dB), L_S is average sound pressure level in the source room (dB), L_R is average sound pressure level in the receiving room (dB), S is area of the test specimen that is exposed in the receiving room (m^2), and A_R is sound absorption of the receiving room with the test specimen in place (m^2). Nonetheless, since a composite wall system was used, a particular formula to develop transmission loss of each 1/3 octave band frequency was applied as follows,

$$t_c S_c = t_s S_s + t_f S_f \text{ or } t_s = (t_c S_c - t_f S_f)/S_s \quad (2)$$

where S_c is area of the composite construction ($S_c = S_f + S_s$) (m^2), S_f is area of the filler element (m^2), S_s is area of the test specimen (m^2), τ_c is transmission coefficient of the composite construction, τ_f is transmission coefficient of the filler element, and τ_s is transmission coefficient of the test specimen.

The composition between the filler wall and the inserted window is as Figure 10.

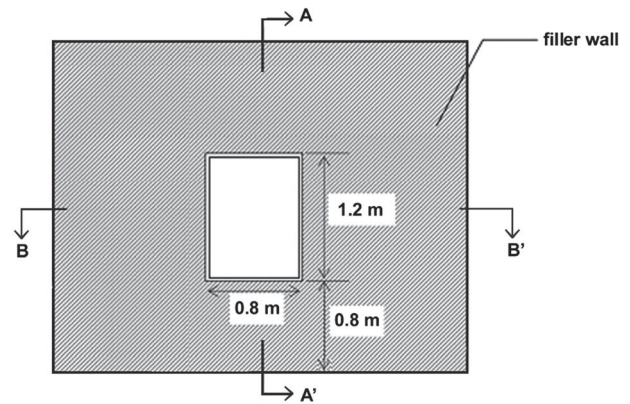**Figure 10.** Front view and schematic dimension of the perpendicular orientation. A similar composition was applied to the sideways orientation.

Later, the outdoor-indoor transmission classes (OITCs) were calculated from the transmission loss (TL) of the 1/3 octave band frequency recorded during the test according to ASTM E1332-90 (ASTM 1998). Measurement of the 1/3 octave band frequency was considered appropriate to simulate spectrum to replicate typical street noise on city streets (Stewart 2008). OITC is a single number representing TL_s of the 1/3 octave band frequency from 80 Hz to 4000 Hz inclusive. It was calculated using formula

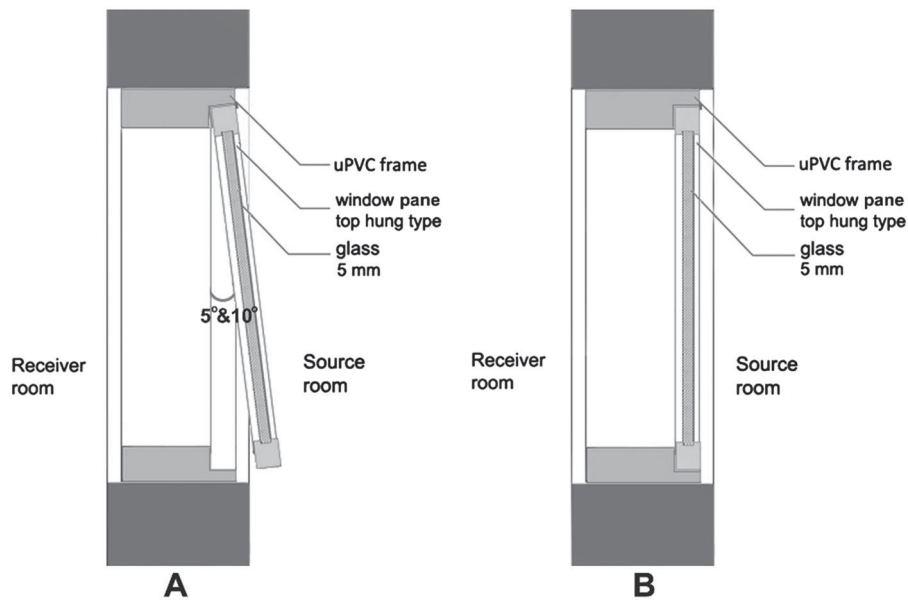


Figure 11. Sections A-A' of the top-hung windows showing the level of the openings of the window pane: 5° (the bottom part of the pane swings out approximately 0.1 m) and 10° (the bottom part of the pane swings out approximately 0.2 m) (A) and 0° or when the pane was closed (B).

as follows,

$$OITC = 100.13 - 10 \cdot \log \left\{ \sum_{i=80\text{Hz}}^{4000\text{Hz}} 10^{\frac{(AWRS_i - TL_i)}{10}} \right\} \quad (3)$$

where 100.13 is the logarithmic sum factor integrated to correct the formula to a frequency related energetic distribution. This value is the to 2 decimals rounded logarithmic sum of the A-weighted reference spectrum,

AWRS_i is the A - weighted reference sound spectrum

(1/3 octave band), and,

TL_i is the sound transmission loss for the 1/3 octave band, i, respectively.

4. Findings and discussions

A series of laboratory tests were carried out to study the potential of a top-hung window to provide natural airflow indoors while blocking environmental noise ingress from outside. Table 3 shows the TLs recorded during the tests, and the TL fluctuation is shown in Figure 12.

Legend: P is perpendicular orientation, 60 is sideways 60°, 90 is sideways 90°, 10, 5 and 0 is the level of openings. The 60–0 and 90–0 curves are identical. The 60–5 and 90–5 curves are identical. Meanwhile the 60–10 curve is identical to some curves as Table 3 indicates.

The results show that the transmission losses (TLs) of the open windows were all almost identical regardless orientation and level of openings. At the low frequency of 80 and 100 Hz, the TLs of the open windows, either open at 5° or 10°, are substantially higher then descend when the frequencies ascend. A

Table 3. Transmission loss (TL) and outdoor-indoor transmission class (OITC) of the perpendicular, sideways 60°, and sideways 90° orientation.

1/3 Octave band frequency (Hz)	Perpendicular (dB)			Sideways 60° (dB)			Sideways 90° (dB)		
	Open 10°	Open 5°	Open 0°(closed)	Open 10°	Open 5°	Open 0°(closed)	Open 10°	Open 5°	Open 0°(closed)
80	18	19	31	18	19	14	18	19	14
100	16	18	29	16	18	24	16	18	24
125	9	9	21	5	6	17	5	6	17
160	4	6	21	7	9	20	7	9	20
200	4	7	20	4	5	18	4	5	18
250	5	8	21	6	8	20	6	8	20
315	6	9	22	7	8	21	7	8	21
400	3	7	22	4	7	22	4	7	22
500	3	6	23	3	7	23	3	7	23
630	4	6	27	4	6	24	4	6	24
800	4	5	29	5	6	25	5	6	25
1000	4	5	31	5	6	27	5	6	27
1250	4	6	34	5	6	30	5	6	30
1600	4	6	35	5	6	32	5	6	32
2000	5	6	33	5	7	33	5	7	33
2500	6	8	31	7	8	30	7	8	30
3150	7	10	31	7	11	31	7	11	31
4000	6	11	33	7	11	33	7	11	33
OITC	5	7	25	5	7	23	5	7	23

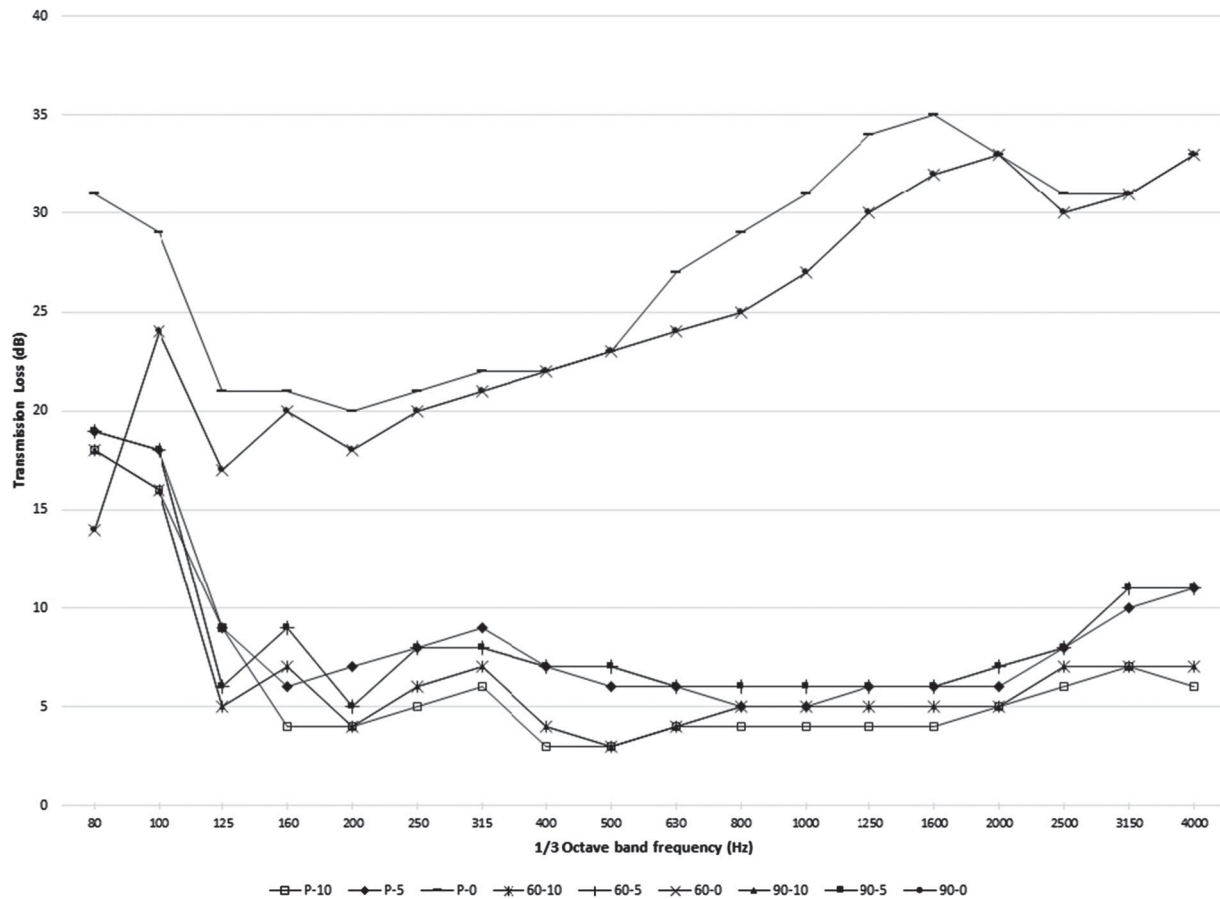


Figure 12. Transmission loss (TL) contours of the tested specimen. Legend: P is perpendicular orientation, 60 is sideways 60°, 90 is sideways 90°, 10, 5 and 0 is the level of openings. The 60-0 and 90-0 curves are identical. The 60-5 and 90-5 curves are identical. Meanwhile the 60-10 curve is identical to some curves as Table 3 indicates.

low-frequency sound is a long wavelength (Kinsler et al. 2009) that is readily blocked by a large window pane. Meanwhile, a high-frequency sound is a short wavelength which intrudes through a small opening more easily. Theoretically, when the primary environmental noise source hits the front wall with the open top-hung window placed perpendicularly, the open areas are at the bottom and alongside the pane (Figure 13). On the opposite wall, when a top-hung window placed sideways, the open area readily faces the noise source (Figure 14). Nonetheless, when the environmental noise enters the open area from many

directions as happens in reality; similar to the diffuse sound field in the source room of the laboratory; the primary sound source has a little effect on the different open area positions and thus to the transmission loss obtained.

In Figure 12, the transmission losses (TLs) of closed top-hung sideways windows were identical regardless of the degree of obliqueness. Sharp coincidence dips were found in both closed top-hung sideways windows of 60° or 90° but not of the perpendicular ones. In an enclosure, wall angle near the boundary wall might cause TL drops. The occurrence of the coincidence dip

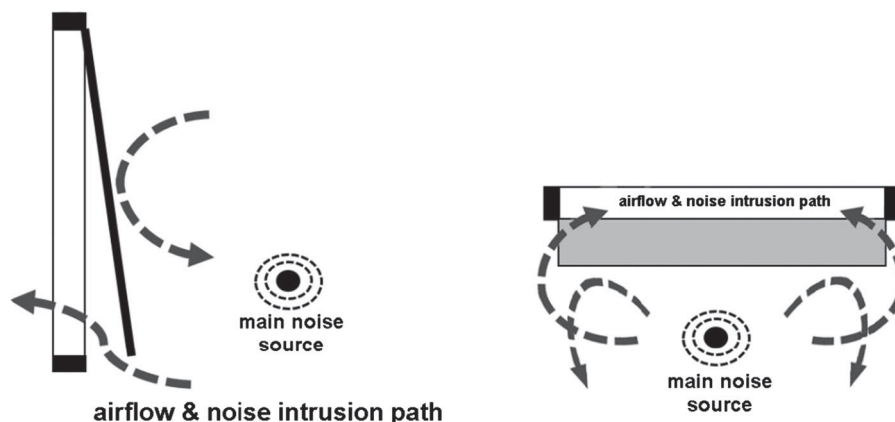


Figure 13. The vertical and horizontal sections of a top-hung window placed perpendicularly to the noise source, and the possible noise rebound by the pane and the intrusion path through alongside and the bottom of the pane.

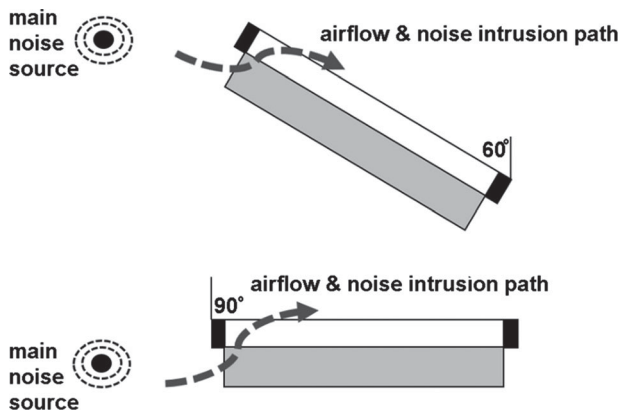


Figure 14. The horizontal section of a top-hung window placed sideways 60° and 90° to the noise source and the possible noise intrusion path through the open areas. Noise rebound is unlikely as the panes do not readily face the main noise source.

needs further validation to ensure the cause, whether due to the wall angle or due to the orientation of the window, or in particular due to the slit that exists between the frame and the pane. Overall, the closed perpendicular window obtained the highest TL compared to the sideways ones.

Table 3 demonstrates that when the window was closed (open 0°), the outdoor-indoor transmission class (OITC) of the perpendicular orientation was higher than the sideways ones. But when it was opened, the OITC was similar regardless of orientations and degrees of obliqueness. These findings strengthen earlier studies that larger openings permit noise intrusion more easily (De Salis, Oldham, and Sharples 2002). Both sideways and perpendicular open top-hung windows obtained similar OITC. The identical transmission loss (TL) in some frequencies of different levels of openings and orientations indicated that the sound transmission in a diffuse field from outdoor to the indoor area was mostly affected by the dimension of the available open area rather than by its orientations.

5. Conclusion

This study was undertaken to explore how feasible it is to use the configuration of different window designs to usefully reduce the ingress of outdoor noise into buildings with a view to helping to enable and encourage the use of natural ventilation in buildings.

The tests undertaken showed that an open top-hung window offered outdoor-indoor transmission class (OITC) as low as 5 when it was opened 10° regardless orientation of the window. The window obtained OITC 7 when it was less opened with a window pane angled 5° regardless window orientation. Both OITC of 5 and 7 are considered too small to reduce environmental noise in a building with natural airflow. Even if the 10° of opening area may be preferable to let more airflow, the users should pay attention to OITC.

Nevertheless, when the window was closed, a window orientated in a perpendicular plane to the main source of the external noise generated higher OITC of 2 points higher compared to the window placed in an oblique. This means that a closed perpendicular window reduce more noise ingress. It may correct a commonly held assumption that a window placed sideways to the noise source will reduce its ingress into a building via the

closed pane caused by its indirect orientation to the assumed main noise source. Previous studies have shown that window orientation can have a significant effect on indoor daylight levels (Yoon, Manandhar, and Lee 2014; Mangkuto, Rohmah, and Asri 2016), which is shown here not to be the case for environmental noise. This study has usefully demonstrated that the tested openable window did not usefully reduce environmental noise ingress and more work with other configurations may prove more successful, but the general conclusion is that if the window in the direct path of an outdoor noise source is opened a significant amount of the noise will be transmitted indoors with top-hung windows.

The finding of this study may be referred by architects that to date an adjusted open window cannot satisfy environmental noise reduction. Since openings are important for buildings in tropical climates, installation of top-hung style windows may be beneficial to users as they can adjust the pane. Whenever natural airflow is on demand, they may open it with a consequence that the outdoor-indoor transmission class (OITC) drops to 5 only. Once they need quietness, the pane should be slightly closed in to gain better OITC and be fully closed to gain much better OITC. The identical transmission loss (TL) in some frequencies of different levels of openings and orientations indicated that the sound transmission in a diffuse field from outdoor to the indoor area was mostly affected by the dimension of the available open area rather than by its orientations.

Nonetheless, the window style investigated in this study offered lesser environmental noise abatement compared to open-20 cm gap-double layered window by Ford and Kerry (1973) with averaged sound reduction index (SRI) of 14. SRI does not readily represent transmission loss of an object to environmental noise intrusion containing the sound frequency of 80 Hz which was not included by Ford and Kerry (1973). Outdoor-indoor transmission class (OITC) as was calculated here is more appropriate and handy.

The larger picture here is that the natural ventilation of buildings is a multiply challenging design venture that must take into account issues not only of noise but also key design impacts of levels of pollution and daylight indoors. To ensure that buildings can increasingly rely on the no cost, effective cooling and health benefits of good levels of natural ventilation indoors not only will more research of this type have to be done to gradually refine and optimize window design but architects will have to become more imaginative in their design of air flow paths through buildings to reduce noise and pollution impacts. Finally there is a hugely important role for political decision makers and planners to play in rethinking the way that cities and settlements are planned, developed and serviced to reduce the ambient levels of noise and pollution in them because in the future we will inevitable have to increasingly rely on natural ventilation to maintain comfort conditions in a warming world.

Acknowledgment

This study was fully funded by the Ministry of Research Technology and Higher Education of the Republic of Indonesia under the scheme of Penelitian Kompetensi under the project 'Acoustical Characteristic of Architectural Glass in Warm Humid Climate' with contract number 023.04.1.673453/2015 and 002/SP2H/P/K7/KM/2016 (made through Kopertis Wilayah VII Indonesia).

Disclosure statement

No potential conflict of interest was reported by the authors.

Funding

This study was fully funded by the Ministry of Research Technology and Higher Education of the Republic of Indonesia under the scheme of Penelitian Kompetensi under the project 'Acoustical Characteristic of Architectural Glass in Warm Humid Climate' with contract number 023.04.1.673453/2015 and 002/SP2H/P/K7/KM/2016 (made through Kopertis Wilayah VII Indonesia).

References

- Alberola, J., I. H. Flindell, and A. J. Bullmore. 2005. "Variability in Road Traffic Noise Levels." *Applied Acoustics* 66 (10): 1180–1195. doi:10.1016/j.apacoust.2005.03.001.
- Ali, S. A., and A. Tamura. 2003. "Road Traffic Noise Levels, Restrictions and Annoyance in Greater Cairo, Egypt." *Applied Acoustics* 64 (8): 815–823. doi:10.1016/S0003-682X(03)00031-8.
- Anon. 1995. *The British Office Market—Occupiers' Preferences and Tomorrow's Workplace*. Los Angeles: Richard Ellis International Ltd.
- ASTM E1332-90. 1998. *Standard Classification for Determination of Outdoor-Indoor Transmission Class*, American Society for Testing and Materials. West Conshohocken, PA: American Society for Testing and Materials. Superseded by ASTM E1332-10a, Standard Classification for Rating Outdoor Indoor Sound Attenuation, American Society for Testing and Materials, West Conshohocken, PA, 19428-2959 USA, 2010.
- ASTM E90-09. 2009. *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements*. West Conshohocken, PA: American Society for Testing and Materials.
- Bunn, R. 1993. "Learning Curve: Building Analysis—De Montfort University." *Building Services (CIBSE Journal)* 15: 20–23.
- Buratti, C. 2002. "Indoor Noise Reduction Index with Open Window." *Applied Acoustics* 63 (4): 431–451. doi:10.1016/S0003-682X(01)00040-8.
- Buratti, C. 2006. "Indoor Noise Reduction Index with an Open Window (Part II)." *Applied Acoustics* 67: 383–401. doi:10.1016/j.apacoust.2005.07.006.
- Capeluto, I. G. 2003. "Energy Performance of the Self-Shading Building Envelope." *Energy and Buildings* 35 (3): 327–336. doi:10.1016/S0378-7788(02)00105-6.
- Coley, D. A. 2008. "Representing top-Hung Windows in Thermal Models." *International Journal of Ventilation* 7 (2): 151–158. doi:10.1080/14733315.2008.11683807.
- De Salis, M. H. F., D. J. Oldham, and S. Sharples. 2002. "Noise Control Strategies for Naturally Ventilated Buildings." *Building and Environment* 37: 471–484. doi:10.1016/S0360-1323(01)00047-6.
- Feriadi, H., and N.H. Wong. 2004. "Thermal Comfort for Naturally Ventilated Houses in Indonesia." *Energy and Buildings* 36: 614–626. doi:10.1016/j.enbuild.2004.01.011.
- Field, C. D., and F. R. Fricke. 1995. "The Attenuation of Road Traffic Noise Entering Buildings Through Ventilation Openings Using Quarter Wave Resonators: Mechanism of Attenuation and Model Experiments." *Building Acoustics* 2 (4): 625–635. doi:10.1177/1351010X9500200404.
- Field, C. D., and F. R. Fricke. 1997. "The Attenuation of Noise Entering Buildings Through Ventilation Openings." *PhD thesis*. The University of Sydney.
- Ford, R. D., and G. Kerry. 1973. "The Sound Insulation of Partially Open Double Glazing." *Applied Acoustics* 6: 57–72. doi:10.1016/0003-682X(73)90029-7.
- Gao, C. F., and W. L. Lee. 2010. "Influence of Window Types on Natural Ventilation of Residential Buildings in Hong Kong." *Proceeding of international high performance buildings conference, paper 16*, Purdue e-Pubs, Purdue University, USA.
- Garg, N., O. Sharma, and S. Maji. 2011. "Experimental Investigations on Sound Insulation Through Single, Double & Triple Window Glazing for Traffic Noise Abatement." *Journal of Scientific Industrial Research* 70: 471–478. http://nopr.niscair.res.in/handle/123456789/11929.
- Guohui, G. 2000. "Effective Depth of Fresh air Distribution in Rooms with Single-Sided Natural Ventilation." *Energy and Buildings* 31 (10): 65–73. doi:10.1016/S0378-7788(99)00006-7.
- Husti, M., and K. Fujimoto. 2012. "Road Traffic Noise Under Heterogeneous Traffic Condition in Makassar City, Indonesia." *Journal of Habitat Engineering and Design* 4 (1): 109–118.
- Husti, M., and M. I. Ramli. 2013. "The Vehicle Speed Distribution on Heterogeneous Traffic: Space Mean Speed Analysis of Light Vehicles and Motorcycles in Makassar – Indonesia." *Proceedings of the Eastern Asia Society for Transportation Studies* 9.
- Irvine, G. 1993. "Sound Insulation of Open Windows: Novel Measures to Achieve Ventilation and Sound Insulation." *Proceedings of IOA* 15 (Part 8): 249–264.
- Jaakkola, J. J. K., and P. Miettinen. 1995. "Type of Ventilation System in Office Buildings and Sick Building Syndrome." *American Journal of Epidemiology* 141 (8): 755–765. doi:10.1093/oxfordjournals.aje.a117498.
- Jorro, S.M.K. 1990. The Sound Insulation of Passive Ventilators. *Proceedings of IOA*, 12 (5): 41–53.
- Karyono, T.H. 2000. Report on Thermal Comfort and Building Energy Studies in Jakarta, Indonesia. *Building and Environment* 35: 77–90. doi:10.1016/S0360-1323(98)00066-3.
- Kinsler, L. E., A. R. Frey, A. B. Coppens, and J. V. Sanders. 2009. *Fundamentals of Acoustics*. 4th ed. Noida: Wiley India Pvt. Ltd..
- Kwon, B., Park, Y. 2013. Interior Noise Control with an Active Window System. *Applied Acoustics*, 74 (5): 647–652. doi:10.1016/j.apacoust.2012.11.005.
- Lord, P., and D. Templeton. 1996. *Detailing for Acoustics*. London: E & FN Spon.
- Mangkuto, R. A., M. Rohmah, and A. D. Asri. 2016. "Design Optimisation for Window Size, Orientation, and Wall Reflectance with Regard to Various Daylight Metrics and Lighting Energy Demand: A Case Study of Buildings in the Tropics." *Applied Energy* 164 (15): 211–219. doi:10.1016/j.apenergy.2015.11.046.
- Mediastika, C. E. 1999. "Ventilated Houses in a hot Humid Region with Reference to Particulate Matter and Noise Reduction." *PhD.*, University of Strathclyde, Glasgow. Accessed 30 May, 2018. www.academia.edu/32645131/Thesis_Review_No._1_DESIGN_SOLUTIONS_FOR_NATURALLY_VENTILATED_HOUSES_IN_A_HOT_HUMID_REGION_WITH_REFERENCE_TO_PARTICULATE_MATTER_AND_NOISE_REDUCTION_by_Christina_E_Mediastika_1999.
- Mediastika, C. E., L. Kristanto, J. Anggono, F. Suhedi, and H. Purwaningsih. 2015. "Sound Transmission Class (STC) of Fixed Window Glazing in Warm Humid Environment." *Proceeding 7th international conference on environmental science and development (ICESD)*.
- Mediastika, C. E., L. Kristanto, J. Anggono, F. Suhedi, and H. Purwaningsih. 2016. "Building Glass OITC in Warm Temperature." *Procedia Engineering* 145: 630–637. doi:10.1016/j.proeng.2016.04.053.
- Mediastika, C. E., L. Kristanto, J. Anggono, F. Suhedi, and H. Purwaningsih. 2017. "Frame Effects on Outdoor–Indoor Transmission Class of Fixed and Open Glass Windows." *Advanced Science Letters* 23 (7): 6168–6172. doi:10.1166/asl.2017.9229.
- Mohajeri, R., and F. R. Fricke. 1995. "An Intelligent Window for Minimizing Noise Intrusion Into Buildings." *Proceedings of ANZACSCA*.
- Mohajeri, R., and F. R. Fricke. 1996. "A Noise Activated Control Approach to Attenuate Transportation Noise." *Proceedings of Australian acoustical society conference*.
- Moore, F. 1993. *Environmental Control Systems: Heating, Cooling, Lighting*. New York: McGraw-Hill.
- National Standardisation Agency of Indonesia. 2001. *Standar Nasional Indonesia SNI 03-6572-2001*. Jakarta: National Standardisation Agency of Indonesia.
- Peliza, S. 1994. "Noise and Natural Ventilation." *Building Services (CIBSE Journal)* 16: 49–50.
- Quirt, J. D. 1981. "Measurement of the Sound Transmission Loss of Windows." *Building Research Note* 72: 1–7. ID: 53f50691-7ed9-4b7e-a4a9-25cf8c3e73b7.
- Quirt, J. D. 1982. "Sound Transmission Through Windows I Single and Double Glazing." *The Journal of the Acoustical Society of America* 72: 834–844. doi:10.1121/1.388263.
- Rijal, H. B., P. Tuohy, M. A. Humphreys, F. Nicol, A. Samuel, and J. Clarke. 2007. "Using Results From Field Surveys to Predict the Effect of Open Windows on Thermal Comfort and Energy use in Buildings." *Energy and Buildings* 39 (7): 823–836. doi:10.1016/j.enbuild.2007.02.003.
- Roaf, S., and F. Nicol. 2017. "Running Buildings on Natural Energy: Design Thinking for a Different Future." *Architectural Science Review* 60 (3): 145–149. doi:10.1080/00038628.2017.1303924.

- Sharland, I. 1979. *Woods Practical Guide to Noise Control*. 3rd ed. England: Woods Ltd.
- Stewart, N. 2008. "Outdoor to Indoor A-Weighted Sound Level Reduction of Typical Modular Classrooms and Assessment of Potential Performance Improvements Based on the Outdoor-Indoor Transmission Class Spectrum." *Proceeding 156th meeting acoustical society of america*, Florida.
- Twinn, C. 1994. "A Buoyant Line of Thinking: Anglia Polytechnic University Learning Resource Centre Chelmsford." *Building Services (CIBSE Journal)* 6: 23–25.
- Vincent, D., I. Annesi, B. Festy, and J. Lambrozo. 1997. "Ventilation System, Indoor air Quality, and Health Outcomes in Parisian Modern Office Workers." *Environmental Research* 75 (2): 100–112. doi:10.1006/enrs.1997.3764.
- Yoon, Y. B., R. Manandhar, and K. H. Lee. 2014. "Comparative Study of Two Daylighting Analysis Methods with Regard to Window Orientation and Interior Wall Reflectance." *Energies* 7 (9): 5825–5846. doi:10.3390/en7095825.
- Yu, X., S. K. Lau, L. Cheng, and F. Cui. 2017. "A Numerical Investigation on the Sound Insulation of Ventilation Windows." *Applied Acoustics* 117 (A): 113–121. doi:10.1016/j.apacoust.2016.11.006.
- Zitzewitz, P. W. 2011. *The Handy Physics Answer Book*. 2nd ed. Detroit: Visible Ink Press: 167.