

Performance of Mechanical Energy Harvesting Unit for Generating Electricity for Portal Gate System

by Joni Dewanto

Submission date: 03-Feb-2021 08:50AM (UTC+0700)

Submission ID: 1500353353

File name: BAL-4120-101E_Revised_for_JITDETS_2020-Formatted.docx (267.74K)

Word count: 3946

Character count: 20841

Performance of Mechanical Energy Harvesting Unit for Generating Electricity for Portal Gate System

Joni Dewanto¹, Oegik Soegihardjo²

^{1,2}Mechanical Engineering Department, Faculty of Industrial Technology, Petra Christian University

Jl. Siwalankerto 121-131, Surabaya 60236, Indonesia

Phone: 0062-31-8439040, Fax: 0062-31-8417658

Email: jdewanto@petra.ac.id¹, oegiks@petra.ac.id²

Abstract--- The portal gate systems for parking area need electricity for opening/closing the portal (barrier crossbar) and printing the parking ticket. The mechanical energy harvesting unit presented on this paper is designed for supplying electrical energy needed by the portal gate system for its operation. The mechanical energy harvesting unit converted linear movement of the slider into rotating movement of the fly wheel using rack and pinion. The energy stored in the fly wheel is used to turn a small electric generator attached to the energy harvesting unit that provided electricity for the portal gate system. This energy harvesting unit is designed as a breakthrough to produce electrical energy by utilizing the weight of the vehicle that enters the parking space.

The linear movement of the slider is gained from the weight of the vehicle that passed on the mechanical energy harvesting unit. This system is appropriate for a stand alone portal gate systems. Three categories of passenger cars (small, medium and large) each with mass of 1300 kg, 1700 kg and 2000 kg respectively were used in the experiment. The three vehicles used for this experiments were able to produce a maximum rotation of the harvesting unit's electric generator for 2500 rpm, 2890 rpm and 3140 rpm, respectively. Testing of the harvesting unit's electric generator was done with a continuous rotation. The electrical loads were taken from LED lights with voltage of 24 Volt, 18 Volt and 12 Volt produces power of 19 Volt x 3.6 mAmp (4000 rpm), 17 Volt x 4.3 mAmp (3500 rpm) and 12 Volt x 11 mAmp (2400 rpm) respectively. Initial testing of the mechanical energy harvesting unit shows that this equipment is capable of producing the required electrical energy.

Key words: mechanical energy harvesting unit, fly wheel, generator performance, electrical load

I. INTRODUCTION

Electricity is one form of energy to support various activities of human life in modern society. The increase of electricity needs occurred in line with the growth of human population in many parts of the earth. If these needs are only supplied from fossil fuel energy sources, then in time there will be an energy crisis because the fossil fuel energy reserves in the earth's crust will be depleting. Energy from the fossil fuels also accounts for a sizeable percentage of air pollution.

Being concerned on how to minimize pollution, a review of some energy harvesting

systems that gather energy from sources that are available from industrial or other environments such as mechanical vibrations, temperature gradients, natural or artificial light was proposed [1]. The occurrence of the fossil energy crisis also pushes efforts to obtain a sustainable source of energy for electric power devices or portable systems that generally use small electric power. Furthermore, various studies show that the use of fossil fuels as an energy source also has a negative impact on the environment even in the developing country [2] so that mitigating strategy and long-lasting approach has to be considered to

reduce the environmental crisis. The by-products of the fuel combustion also caused environmental crisis that leads to global pediatric health problems. The combustion of coal, oil, gasoline, diesel and natural gas are caused air pollution that biologically and psychologically harmful to the developing fetus and young child's health [3].

Considering the increasing electricity demand, it has been developed various designs and researches to obtain an alternative energy that meets two criteria namely environmentally friendly and renewable, either from conventional or unconventional energy sources. The conventional energy sources such as hydro electric power generation that utilizes the height of falling water, thermal power generation that uses geothermal combustion, nuclear power generation that utilizes nuclear fusion, and win power generation that utilizes wind are usually large scale nature [4]. The large scale nature means that those power plant system are centralized power station and to distribute electricity generated to the customers require transmission and distribution cable networks.

At present, various power generation systems from unconventional energy sources are also developed based on the law of conservation of energy. The wasted or unused energy from one system can be changed by other system into a useful form of energy. The electrical energy generated is not always on a large-scale, but it can also be only for individual purposes or on a small scale that is sufficient to meet certain electricity needs, such as for the cellular phone battery charging system, or for lighting system in a certain area. The electricity generation system that utilizes the energy of the vehicle's weight even though it is still in the conceptual stage, has been delivered [4], namely by utilizing the rack-pinion pair and gear system. The development of electric energy generation systems from the weight of moving vehicles has also been developed by several researchers [5], [6]. The results of a study [5], stated that kinetic energy released from the four wheeler when passing

the speed bumper can be used to run the air conditioner, charge the battery, street lighting or for other purposes. A new technique for generating electricity from kinetic energy that is wasted from a running vehicle was discussed by a research paper deal with power generation from wasted kinetic energy of vehicles [6]. The new technique is to use a roller that rotates when passed by a vehicle. By using the gear and chain system as a power transfer system, the roller rotation is transmitted to rotate the electric generator.

Utilization of wind energy as a source of electrical energy obtained in moving vehicles was conveyed by several researchers [7], [8]. Under ordinary circumstances, when a vehicle is moving there will be a relative (wind) speed between the air and the vehicle. Thus the anemometer and sensor [7] or turbine [8] mounted on a moving vehicle will rotate. Thus the rotation of the anemometer and turbine shaft can be used to rotate the shaft of an electric generator for individual purposes.

By using piezo electric, an electrical energy can also be generated from mass motion with even small random deviations [9], [10]. The design improvement schemes and techniques for obtaining energy using piezoelectric and electromagnetic has developed, and the results showed that the energy can even be obtained at random movements (arbitrary movement), such as vibrations that occur in the vehicles [9]. Even the electrical energy can also be obtained from static loads, with the mechanism has already granted a patent [11]. The mechanism used a platform to place a load so that the platform can move down vertically to rotate an electric generator.

The use of car or vehicle weights to drive a generator driving mechanism that is capable of producing electrical energy is an alternative way for supplying electrical energy. Utilizing the speed of running vehicle to power an on-road energy harvesting system is successfully implemented [12], [13]. In the midst of fossil fuel and energy crisis, obtaining a new sustainable source of energy to power portable

devices become a new field of research for renewable energy harvesting. Mechanical system as sources of energy can be an interesting alternative to harvest energy [14]. When mechanical energy is available either from vehicles, human and other vibrating structures, the mechanical energy harvesting remains an option that can be considered [15]. Improving the conversion of the mechanical energy into electrical energy still become an interesting field of research on renewable energy [16] especially for mechanical energy harvesting unit.

This paper presents the results of study on a new equipment mechanism and is implemented to obtain electricity more effectively. The new equipment utilizes flywheel, rack and pinion mechanism to convert linear motion into rotational one. The use of flywheels as a mechanical energy storage is widely used because their ability to store energy can be used for various things [17]. The development and improvement of flywheel design in the automotive field is able to save fuel up to 20% for buses and up to 35% for regular cars [18]. Even for small scale mechanical harvesting unit, the proper design of the flywheel still have to be considered. To be able to make the most of the energy from the flywheel, the design and selection of the flywheel dimensions must be done carefully to prevent the negative effects of flywheel design inaccuracies. Improper design of the flywheel can harm the

mechanism if its angular speed is exceeded [19].

The electricity generated comes from unconventional sources, namely from the potential energy of the weight of the vehicle passing above the new equipment mechanism (sliding mechanism) instal on mounted on the road surface. Thus if the system is installed at the entrance and exit of the parking areas, such as malls, hospitals, airports and others, then the equipment will obtain energy continuously from the passing vehicles. In a more massive and widespread implementation, this equipment has the potential to reduce the use of electricity sourced from fossil fuel energy.

II. THEORETICAL BACKGROUND

The mechanical energy harvesting unit (MEHU) presented in this paper uses a rack and pinion mechanism to convert translational movements into rotational movements. The mechanical part of the harvesting unit is shown in Fig. 1. The dimension and rotational (angular) speed of the flywheel in the mechanical system of the MEHU are designed based on the safety criteria. In order to operate safely, mass and rotational speed of the flywheel cannot exceed a certain value. [18],[19].

The entire MEHU unit consists of mechanical unit and electrical units as shown in Fig. 2. When the vehicle passes at MEHU the vehicle's wheel will press the slider connected to the rack downward as shown in Fig.1.

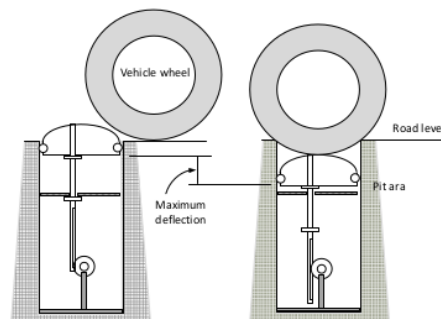


Fig. 1 Mechanical system of the MEHU.

The rack will rotate the pinion mounted on the same shaft with the flywheel. When the vehicle's wheels pass the MEHU slider, the slider will displace downward for 12 cm (0.12 m). Assuming the weight of the vehicle is evenly distributed at the front and rear wheels, the amount of energy from the weight of the

vehicle at the front wheels is calculated by equation (1).

$$U = \frac{W}{2} s \quad (1)$$

W is the weight of the vehicle, (N) and s is slider displacement, (m).

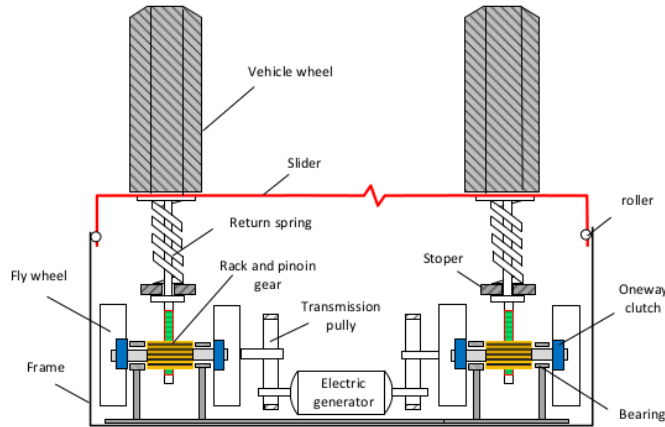


Fig. 2 Mechanical energy harvesting unit (MEHU).

From the energy conservation law, the amount of energy received and the rotational speed of the flywheel can be calculated by equation (2).

$$\begin{aligned} U &= 0.5 I \omega^2 \\ I &= 0.5 m R^2 \\ \omega^2 &= \frac{2U}{I} \quad (2) \end{aligned}$$

I is mass moment of inertia of the flywheel, R radius of flywheel (m), ω angular velocity of flywheel, (rad/sec). The ratio of the pulley diameter on the flywheel shaft to the pulley diameter on the generator shaft as shown in Fig. 2 is 4 to 1. This pulley ratio is chosen to increase the rotational speed of the generator shaft four time faster than that of the flywheel shaft.

Considering any energy losses in the MEHU mechanical system such as friction between the slider and the frame, bearings, belt and pulley mechanism, the mechanical efficiency,

η_m must be included in equation 2, and the equation becomes,

$$\omega^2 = \frac{2U}{I} \eta_m \quad (3)$$

Several values of mechanical efficiencies were taken into account to simulate the performance of the MEHU mechanical system.

III. RESULTS AND DISCUSSION

This section discusses the results of the testing of the mechanical energy harvesting units (MEHU). The testing of the unit consists of two parts. The first testing is to measure the ability of the mechanical system of MEHU. This test is carried out to get the maximum rotation that the generator can get when the vehicle passes the MEHU. The second testing is to measure the ability of the generator to produce voltage and electric current under various loads and rotations. To facilitate the measurement of the generator performance, the testing of the electric generator of the MEHU is

carried out at a constant rotation or constant speed.

A. Results of the MEHU Mechanical System Testing

Table 1 shows the mechanical system performances of the MEHU which were tested using three vehicle weight, categorized as small, medium and large vehicle. The

generator speeds (rotation) test results in Table 1 are the maximum speed that the generator can reach when the vehicles pass the MEHU. After the vehicles pass the MEHU, the generator rotation will decrease until finally it stops. The maximum speed of the generator is obtained based on pulley diameter ratio of 4 to 1 as shown in Fig.2.

TABLE 1.
PERFORMANCE OF MEHU MECHANICAL SYSTEM

No.	Mass of vehicle (kg)	Weight of vehicle (N)	Generator rotation (rpm)	
			Simulation	Test Results
1	Small (1300 kg)	12,740	2589	2500
2	Medium (1700 kg)	16,660	2961	2890
3	Large (2000 kg)	19,600	3211	3140

Table 1 shows the MEHU's test results that represents the ability of the MEHU mechanical system to rotate the electric generator. The MEHU mechanical system based on three vehicle masses is able to produce generator rotational speed from 2500 rpm to 3140 rpm. This rotation range corresponds to the rotation range required by the MEHU electric generator.

Fig. 3 shows the simulation of MEHU's ability to rotate an electric generator.

Simulations carried out with mechanical efficiency of 70%, 60% and 50% respectively. The test results of the generator speed are approach the generator speed simulation with 60% mechanical efficiency. The MEHU mechanical system test results indicate that it is still possible to improve the MEHU design so that its mechanical efficiency can be improved.

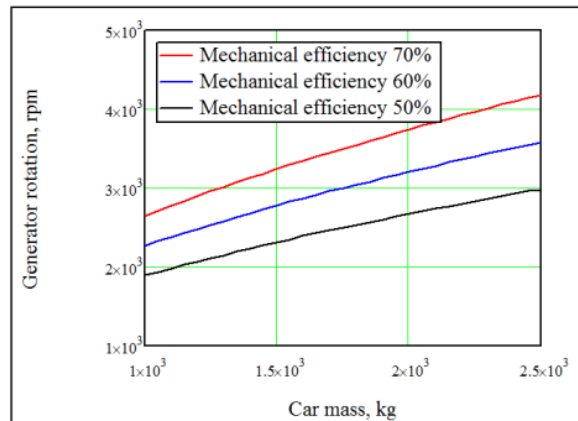


Fig. 3 Simulation of MEHU's ability to rotate the electric generator.

B. Results of the MEHU Electric Generator Testing

MEHU electric generator testing is carried out at constant speed (constant rotation) with various electric loads using LED lamps. Testing of electric generators at constant rotation is carried out to facilitate an easy measurement. When testing the electric generator at changing speed (based on the transient movement of the slider mechanism of the MEHU), the voltage and current measuring devices cannot read the data properly. Characteristics of measuring instruments used

in this experiment (volts and amperes meters) can only read data properly when condition or generator speed is steady

The ability or performance of the MEHU electric generator is expressed in term of voltage and current curves in the following figures. The electrical load is obtained or taken from LED lights consisting of 8, 6 and 4 lamps arranged in series to produce a voltage of 24, 18 and 12 volts respectively, to match the voltages generated by the electric generator.

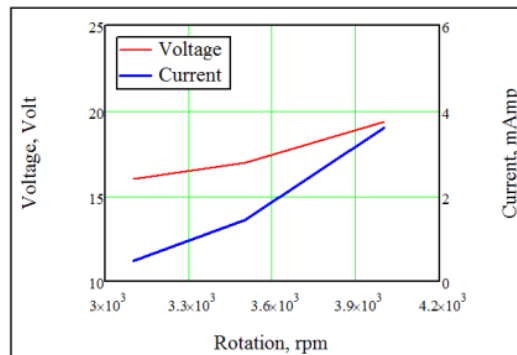


Fig. 4 Voltage and Current taken from load of 8 LED lamps at various generator rotation (rpm).

Fig. 4 is the performance of the electric generator with a load of 8 LED lamps (24 volts). Rotation range starts from 3100 rpm, 3500 rpm to 4000 rpm, the resulting voltages

start from 16 volts, 17 volts to 19.4 volts, with the resulting currents are 0.48 mA, 1.43 mA to 3.6 mA respectively.

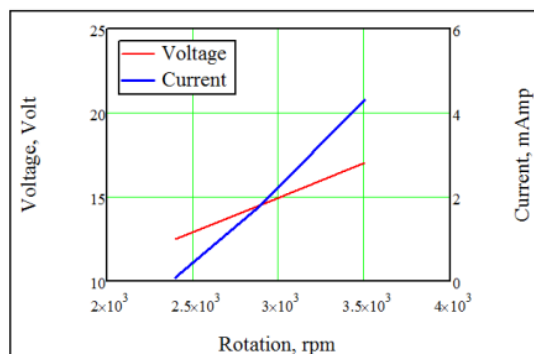


Fig. 5 Voltage and Current taken from load of 6 LED lamps at various generator rotation (rpm).

Fig. 5 is the performance of the electric generator with a load of 6 LED lamps (18 volts). The rotation range starts from 2400 rpm, 2900 rpm to 3500 rpm; the resulting voltages

start from 12.5 volts, 14.5 volts to 17 volts, with the resulting currents are 0.1 mAmp, 1.8 mAmp to 4.3 mAmp respectively.

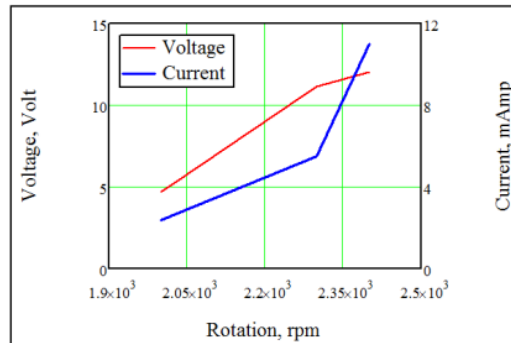


Fig. 6 Voltage and Current taken from load of 4 LED lamps at various generator rotation (rpm).

Fig. 6 is the performance of the electric generator with a load of 4 LED lamps (12 volts). The rotation range starts from 2000 rpm, 2300 rpm to 2400 rpm; the resulting

voltages start from 4.7 volts, 11.2 volts to 12 volts, with the resulting currents are 2.4 mAmp, 5.5 mAmp to 11 mAmp respectively.

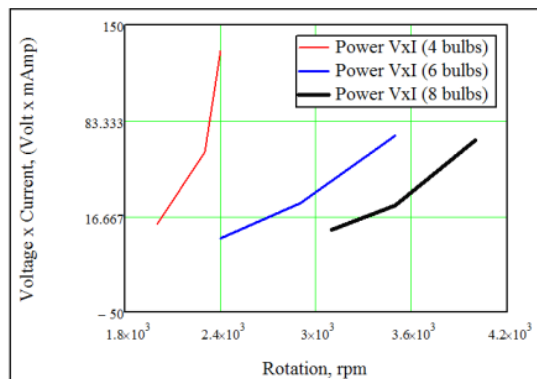


Fig. 7 Electric power taken from load of 8, 6 and 4 LED lamps at various generator rotation (rpm).

Fig. 7 shows the power curve that can be produced by the electric generator as a function of generator rotation, according to the load taken from several LED lamps being tested, namely 12 volts, 18 volts and 24 volts. To store the electric power generated by the electric generator either a 12 volts battery or a

24 volts battery can be chosen. Based on the generator performance curves shown in Fig. 4 to Fig. 7 show that the mechanical system of the MEHU is able to rotate the electric generator to produce voltages and electric currents which are able to supply electrical power to power the LED lights.

C. Constraints During the Experiments

Some obstacles arise during the experiments. The first obstacle is the onset of friction between slider and vertical frame of the MEHU mechanical system when the slider moves downward. When the car passes the MEHU, the slider cannot directly move down but swipe the MEHU vertical frame. This impedes the linear motion of the slider and reduces the ability to give maximum rotation generated by the MEHU mechanical system. This first obstacle can be overcome by adding a roller on the slider side. The roller added on the side of the slider can reduce significantly the friction between slider and vertical frame of the MEHU and at the time it will improve and facilitate the linear motion of the mechanical system.

The second obstacle is the inability of the measuring devices to read data (voltage and current) when the generator speed or rotation is changing (transient rotation), so the voltage and current data can not be captured. During testing the electric generator using transient rotation, the LED light (as an electric load) turns on when the generator rotates at maximum rotation until a few moments before the rotation stops. This shows that the MEHU is able to produce electrical energy in transient or changing rotation even though the measuring devices can not display the voltage and current. But how much the voltages and currents generated, they can not be read by a measuring devices. The voltage and current measuring devices that capable of reading transient loads are needed to read data.

D. Further experiments

Further experiments must be carried out to explore the capability of the MEHU being operated under different operating condition. The first experiment will be conducted is to test the ability of MEHU to produce electric power while the electric generator is operated under changing speed (transient rotation). The

following experiment is to determine how many cars per hour that must pass through MEHU to produce economical and sufficient electric power to be stored in batteries.

IV. CONCLUSIONS

The designed of the mechanical energy harvesting unit (MEHU) is capable of producing rotation or speed accordingly to produce sufficient electrical energy by utilizing the weight of the vehicle. Thus the MEHU can be used as an alternative way to produce small-scale electrical energy.

The MEHU mechanical system test results indicate that it is still possible to improve the MEHU design so that its mechanical efficiency can be improved. The mechanical efficiency achieved by MEHU is about 60%.

The weight of various vehicles parked in the urban parking areas with mass of 1300 kg, 1700 kg and 2000 kg, respectively, are capable of producing a maximum MEHU rotation of 2500 rpm, 2890 rpm and 3140 rpm. Thus the use of vehicle weights as a driving source of the MEHU to supply the electricity needs by the portal gate system is appropriate.

The MEHU testing with constant speed using various loads of LED lamps with 24 Volt, 18 Volt and 12 Volt voltage produces power of 19 Volt x 3.6 mAmp (4000 rpm), 17 Volt x 4.3 mAmp (3500 rpm) and 12 Volt x 11 mAmp (2400 rpm) respectively.

V. ACKNOWLEDGEMENTS

The research was supported and funded by Research Grant from the Ministry of Research and Technology of Higher Education of Indonesia (Penelitian Dasar Unggulan Perguruan Tinggi) during the 2019 fiscal year.

The authors also would like to thank the Manufacturing Laboratory of Mechanical Engineering Department of Petra Christian University which provides the facilities and supporting equipments needed for this reserach.

VI. REFERENCES

- [1] B. Paso, J.I. Garate, J.A. Araujo, and S. Ferreiro., Energy Harvesting Technologies and Equivalent Electronic Structural Models - Review., www.mdpi.com/journal/electronics, *Electronics* 2019, 8, 486; doi: [10.3390/electronics8050486](https://doi.org/10.3390/electronics8050486), 2019.
- [2] A. Oludaisi, A. Kayode, and O. Ayodeji., Bridging Environmental Impact of Fossil Fuel Energy: The Contributing Role of Alternative Energy., *Journal of Engineering Studies and Research – Volume 23*, No. 2, 2017.
- [3] F. Perera., Pollution from Fossil-fuel Combustion is the Leading Environmental Threat to Global Pediatric Health and Equity: Solutions Exist., *International Journal of Environmental Research and Public Health*, 15, 16; doi: [10.3390/ijerph15010016](https://doi.org/10.3390/ijerph15010016), 2018.
- [4] V. A. Patel, A. D. Tailor, and M. R. Patel, Energy Harvesting by Utilizing Weight of Vehicle at Highway IQSR *Journal of Mechanical and Civil Engineering (IQSR-JMCE)* e-ISSN: 2278-1684, p-ISSN: 2320-334X, Vol 11. Issue 4, Ver VII (Jul – Aug. 2014) PP 42-44
- [5] A. Ganatra, A. Amilkantwar, V. Girase, and A. Pandhare, Study Of Energy Generation From Weight Of Moving Vehicles, 3 International Conference on idea, Impact and Innovation in Mechanical Engineering (ICIIME 2017), Volume 5, Issue 6, ISSN 2321-8169
- [6] W. Adailah, K. Al-Qdah, and M. Mahasneh, Potential of Power Generation Utilizing Waste Kinetic Energy from Vehicle, *Scientific Research, Smart Grid and Renewable Energy*, 2012,3 104-111, doi: [10.4236/sgre.2012.3.2015](https://doi.org/10.4236/sgre.2012.3.2015)
- [7] H. Nasser, Vehicle Dynamics Conversion into Power (Dynapower), *ScienceDirect, AASRI Procedia* 7, pp 32-37., Conference on Power and Energy System., 2014.
- [8] B. P. Singh, and M. M. Gore, Green Energy Generation from Moving Vehicles, *International Journal of Engineering Science and Technology (IJEST)*, Vol. 9 No 09S, ISSN: 0975-5462, Sep 2017.
- [9] B. Maaner, A. Boughamoura, A. M. R. Fath El-Bab, and L. A. Francis, A review On Design Improvement And Techniques For Mechanical Energy Harvesting Using Piezoelectric And Electromagnetic Schemes, *Energy Conversion and Management* 199-111973, Journal homepage: www.elsevier.com/locate/enconman ., 2019.
- [10] H. Najini, and S. Mthukumaraswamy., Piezoelectric Energy Generation from Vehicle Traffic with Technoeconomic Analysis, *Hadawi Journal of Renewable Energy*, Vol. 2017, Article ID 9643858, 16 pages, <https://doi.org/10.1155/2017/9643858>.
- [11] J. R. Geletka, Royal Oak, MI (US), Electricity Production from Static Weight, Patent Application Publication Geletka, Pub. No: US 2010/0117374 A1, Pub Date; May 13,2010.
- [12] L. Wang, J. Park, W. Zhou, J. Ban, and L. Zuo., On-Road Energy Harvesting for Traffic Monitoring., Final Report., University Transportation Research Center-Region II, City College of New York, Nov. 2014
- [13] Y. Chen, H. Zhan, C. Li, H. Zheng, and Q. Yang, Mechanical Energy Harvesting from Road Pavement Under Vehicular Load Using Embedded Piezoelectric Elements., *Journal of Applied Mechanics*, Vol. 83, 16
- [14] I. Sil, S. Mukherjee, and K. Biswas, A Review of Energy Harvesting Technology and Its Potential Applications., *Environmental and Earth Sciences Research Journal*., A Publication of IIETA, Vol. 4, No. 2, June 2017, pp. 33-38.
- [15] P.C.K. Devi, Survey on Energy Harvesting Techniques., *International Journal of Computer Science Engineering and Technology (IJCSET)*, Vol. 4, Issue 10, p 256-259, Oct. 2014.

- [16] R.L. Harne and K.W. Wang, A Review of the Recent Research on Vibration Energy Harvesting via Bistable Systems., IOP Publishing Ltd., Journal of Smart Materials and Structures., **22**, 12pp (2013).
- [17] L.T.E. Nyamayoka, G.A. Adewumi and F.L. Inambao., Design of a Prototype Generator Based On Piezoelectric Power Generation for Vibration Energy Harvesting., Journal of Energy in Southern Africa, **28**, Number 4., p. 32-40, 2017.
- [18] M. Hedlund, J. Lundin, J. Santiago, J. Abrahamsson, and H. Bernhoff, Flywheel Energy Storage for Automotive Applications., Energies 2015, Open Access Journal, p 10636-10663.
- [19] (2008) Active Power Inc., Understanding Flywheel Energy Storage: Does High.Speed Really Imply a Better Design., White Paper 112, Austin, Texas, www.activepower.com.

Performance of Mechanical Energy Harvesting Unit for Generating Electricity for Portal Gate System

ORIGINALITY REPORT

7%

SIMILARITY INDEX

7%

INTERNET SOURCES

8%

PUBLICATIONS

4%

STUDENT PAPERS

PRIMARY SOURCES

1	www.iosrjournals.org Internet Source	1%
2	deshbhagatuniversity.in Internet Source	1%
3	Submitted to Heriot-Watt University Student Paper	1%
4	jesr.ub.ro Internet Source	1%
5	repository.up.ac.za Internet Source	1%
6	www.hindawi.com Internet Source	1%
7	He Zhang, Yuhui Zhou, Liwei Quan. "Identification of a moving mass on a beam bridge using piezoelectric sensor arrays", Journal of Sound and Vibration, 2021 Publication	1%

pastel.archives-ouvertes.fr

8

Internet Source

1%

9

Soegihardjo, Oegik, Suhardjono, Bambang Pramujati, and Agus Sigit Pramono. "Modal and Harmonic Response Analysis: Linear-Approach Simulation to Predict the Influence of Granular Stiffeners on Dynamic Stiffness of Box-Shaped Workpiece for Increasing Stability Limit against Chatter", Applied Mechanics and Materials, 2014.

Publication

1%

10

Wail Adaileh, Khaled Al-Qdah, Mayyas Mahasneh. "Potential of Power Generation Utilizing Waste Kinetic Energy from Vehicles", Smart Grid and Renewable Energy, 2012

Publication

1%

11

www.mdpi.com

Internet Source

1%

Exclude quotes OnExclude matches < 1%Exclude bibliography On