

Application of Metaheuristic Algorithms in Truss Structure Sizing Optimization

by Daniel Tjandra

Submission date: 24-Feb-2023 09:53AM (UTC+0700)

Submission ID: 2021726131

File name: Publikasi1_15011_6475.pdf (981.09K)

Word count: 3172

Character count: 14899

PAPER · OPEN ACCESS

Application of Metaheuristic Algorithms in Truss Structure Sizing Optimization

7
To cite this article: D. Prayogo *et al* 2020 *IOP Conf. Ser.: Earth Environ. Sci.* **506** 012045

View the [article online](#) for updates and enhancements.

Application of Metaheuristic Algorithms in Truss Structure Sizing Optimization

D. Prayogo^{1*}, K. Harsono^{1*}, K. E. Prasetyo¹, F. T. Wong¹, D. Tjandra¹

¹Department of Civil Engineering, Petra Christian University, Jalan Siwalankerto 121-131, Surabaya 60236, Indonesia

*Corresponding author e-mail: prayogo@petra.ac.id; m21416123@john.petra.ac.id

Abstract. Field studies of structural optimization have gained increased attention due to the rapid development of metaheuristic algorithms. One widely known metaheuristic algorithm, Particle Swarm Optimization (PSO), has been extensively used to solve many problems and is reported to have fast convergence behavior and good accuracy. As many problems become more complex, studies have been focused on improving PSO searching capability. This study presents the application of PSO and its variants in optimizing truss structures. The performances of PSO and several PSO variants, namely, linearly decreasing inertia weight PSO (LDW-PSO) and bare bones PSO (BB-PSO), were compared and investigated. All optimization algorithms were tested in 72-bar and 25-bar spatial truss problems. The results indicate that BBPSO was the best algorithm in terms of optimum solution, consistency, and convergence behavior.

1. Introduction

The truss structure is the most common structural component used in buildings. Steel truss structures are usually used as bracing or the main building structure. With rapid construction growth, finding more efficient structural designs through optimization are needed to minimize cost. The goal of structure optimization is to find the most efficiently sized structure without violating any engineering constraints. Structural efficiency is usually regarded as the weight of the structure [1].

Truss structure optimization has attracted recent and growing interest. Truss structures have many constraints and variables, which makes optimizing these structures complex and challenging. However, metaheuristic methods are efficient and effective in solving such large and complex problems [2]. Metaheuristic algorithms apply natural phenomena and randomization concepts to search for an optimum solution globally using trial and error [3]. Particle swarm optimization (PSO) [4] is a metaheuristic algorithm that is frequently used to solve optimization problem. PSO has a simple concept that mimics flocking birds. Despite its simplicity, PSO has some weaknesses, with one being parameter that can affect its performance. These parameters must be manually adjusted to the problem [5]. Several variants of PSO have been developed to overcome these weaknesses such as Linearly Decreasing Inertia Weight Particle Swarm Optimization (LDW-PSO) [6] and Bare Bones Particle Swarm Optimization (BBPSO) [7].



2. Particle swarm optimization (PSO)

2.1. Particle swarm optimization (PSO)

PSO mimics the behavior of flocking birds. In a manner similar to a flock of birds looking for food, the PSO searches for the optimal solution. This simple and easy to understand concept makes this algorithm popular with researchers. The weakness of this algorithm is the need to pre-set the parameters to adapt to different problems [7].

First, particle location is generated randomly in a specified range [6]. Then, each iteration particle moves to a new location using the velocity in Equation (1) and then updates its position using Equation (2). This new velocity is influenced by four factors: its initial velocity ($v_i(t)$); the best location that this particle discovers ($X_{pbest}(t)$); the best location from population ($X_{gbest}(t)$); and its current location ($X_i(t)$):

$$X_i(t+1) = X_i(t) + v_i(t+1), \quad (1)$$

$$v_i(t+1) = wv_i(t) + r_1C_1(X_{pbest}(t) - X_i(t)) + r_2C_2(X_{gbest}(t) - X_i(t)), \quad (2)$$

where $v_i(t+1)$ is the next velocity; w is inertia weight; $v_i(t)$ is the initial velocity; r_1 and r_2 are random numbers between 0 and 1; C_1 and C_2 are constants that have been set (usually 2); $X_{pbest}(t)$ is personal best; $X_i(t)$ is the initial location; $X_{gbest}(t)$ is global best; and $X_i(t+1)$ is the particle's new location.

2.2. Linearly decreasing inertia weight particles swarm optimization (LDW-PSO)

In PSO, inertia weight is used to balance the global and local searches. A large inertia weight represents a global search while a small inertia weight represents a local search. Linearly decreasing the inertia weight, PSO should have more global search ability at the beginning of the iteration while having more local search ability near the end of the iteration [6]. The inertia weight updates with Equation (3):

$$w = w - (w_s - w_e)(t) / (t_{max}), \quad (3)$$

where w is inertia weight; w_s is initial inertia weight; w_e is final inertia weight; t is current iteration; and t_{max} is total iteration.

2.3. Bare Bones Particle Swarm Optimization (BBPSO)

While LDW-PSO perfected the parameter in PSO, BBPSO eliminates all parameters. Instead of using velocity to update the location, BBPSO uses a Gaussian distribution. The particle's next position is only calculated by its personal best position and swarm global best position. Parameter-free means the algorithm can easily adapt to different problems [7]:

$$\begin{aligned} \mu &= \frac{p_i + gbest}{2}, \\ \sigma &= |p_i - gbest| \\ x(i+1) &= \begin{cases} N(\mu, \sigma) & \text{if } (\omega > 0.5) \\ p_i & \text{else} \end{cases}, \end{aligned} \quad (4)$$

where $P = (p_1, p_2, \dots, p_n)$ is the personal best position of each particle, $gbest$ is the best position of the whole swarm, and ω is a random number from 0 to 1.

3. Materials and methods

A combination of direct stiffness method (DSM) and metaheuristics were used for this truss optimization. Metaheuristics were used to find the optimal cross-sectional area while DSM was used to analyze the structure. DSM outputs are the displacement, axial force, and stress of each element. These outputs are used as constraints for this optimization. When a solution violates the constraints, a penalty is given to the solution.

Before conducting the research, researchers prepared a DSM program for a planar and spatial truss, and prepared three metaheuristic algorithms: PSO, LDW²¹O, and BBPSO. The DSM and metaheuristic algorithms were written using MATLAB 2017a and the results of the three algorithms were compared to determine the best performing algorithm. In general, this program rati³⁰mizes the cross-section area, and iterates using trial and error until it reaches its maximum iteration. A flow chart of the truss optimization process is diagrammed in Figure 1.

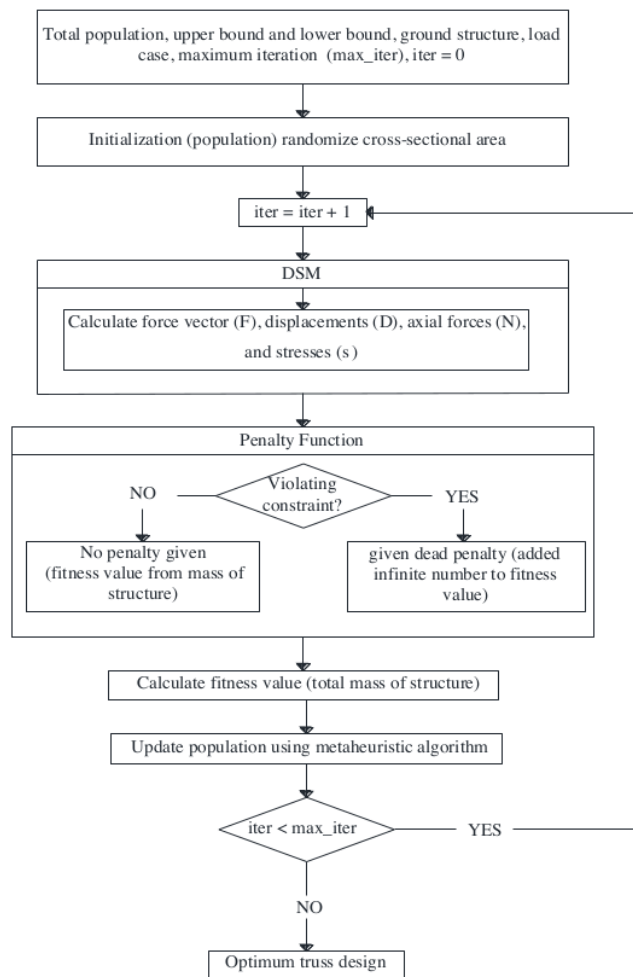


Figure 1. Truss optimization process flow chart

4. Test problem and results

This paper compares the performance of three PSOs using a spatial 2-bar structure problem. Each structure had a load case and discrete variable, which are described next. The goal is to minimize the weight of the structure while not violating the constraints. Each algorithm was run 30 times and with 50 populations. The structures were analyzed using DSM. Algorithms and structural analyses were coded in MATLAB 2017a. Cognitive (C_1) and social (C_2) parameters for PSO and LPSO were set to 2. Inertia weight (W) for PSO was set to 0.8 while the LPSO's inertia weight was linearly decreased from 0.9 to 0.1 with respect to iterations.

31

4.1. Spatial 25-bar truss structure

14

The structure model presented in Figure 2 has been previously studied [3][8]. The material density is 0.1 lb/in³ and elastic modulus 10 Msi. The boundary conditions are stress and displacement. Stress limits in tension/compression is ±13,000 psi and maximum nodal displacement for all free nodes in X, Y, and Z directions is ±0.35 in. Members of the structure are grouped into eight groups: (1) A1; (2) A2–A5; (3) A6–A9; (4) A10–A11; (5) A12–A13; (6) A14–A17; (7) A18–A21; and (8) A22–25.

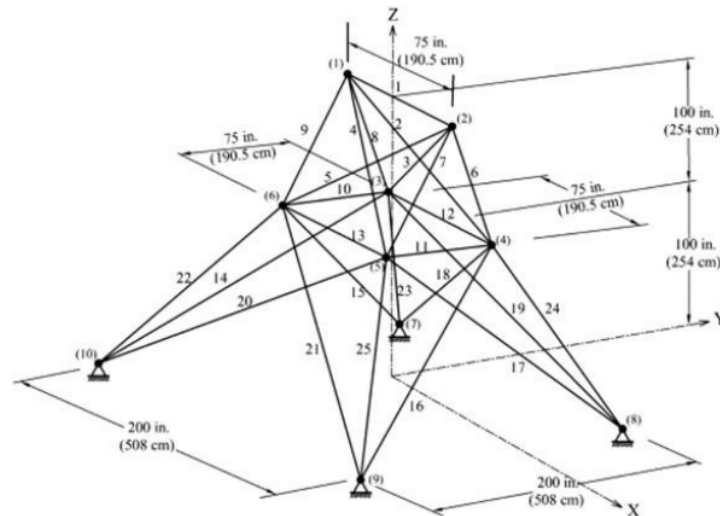


Figure 2. Spatial 25-bar truss structure model

There are two cases for this structure:

Case 1. The cross-sectional areas available are $D = [0.1\ 0.2\ 0.3\ 0.4\ 0.5\ 0.6\ 0.7\ 0.8\ 0.9\ 1.0\ 1.1\ 1.2\ 1.3\ 1.4\ 1.5\ 1.6\ 1.7\ 1.8\ 1.9\ 2.0\ 2.1\ 2.2\ 2.3\ 2.4\ 2.5\ 2.6\ 2.7\ 2.8\ 2.9\ 3.0\ 3.1\ 3.2\ 3.3\ 3.4\ 3.5\ 3.6]$ (in²). (Loads are shown in Table 1.)

Case 2. The cross-sectional areas available are $D = [0.01\ 0.4\ 0.8\ 1.2\ 1.6\ 2.0\ 2.4\ 2.8\ 3.2\ 3.6\ 4.0\ 4.4\ 4.8\ 5.2\ 5.6\ 6.0]$ (in²). (Loads are shown in Table 2.) In this case, there are two cases to be run and the cross-section used has to satisfy all boundary conditions in both cases.

Table 1. Loading Conditions for 25-bar Truss Problem (Case 1)

Load Cases	Nodes	Loads		
		P_x (kips)	P_y (kips)	P_z (kips)
Case 1	1	1	-10	-10
	2	0	-10	-10
	3	0.5	0	0
	6	0.6	0	0

Table 2. Loading Conditions for 25-bar Truss Problem (Case 2)

Load Cases	Nodes	Loads			
		P_x (kips)	P_y (kips)	P_z (kips)	
Case 2	2	1	0	20	-5
		2	0	-20	-5
	3	1	1	10	-5
		2	0	10	-5
	3	0.5	0	0	
	6	0.5	0	0	

Table 3. Comparison Optimization Result for 25-bar Problem (Case 1)

Variables	HS[8]	PSO	LDW-PSO	BBPSO
A1	0.1	0.1	0.1	0.1
A2-A5	0.3	0.3	0.3	0.3
A6-A9	3.4	3.4	3.4	3.4
A10-A11	0.1	0.1	0.1	0.1
A12-A13	2.1	2.1	2.1	2.1
A14-A17	1	1	1	1
A18-A21	0.5	0.5	0.5	0.5
A22-A25	3.4	3.4	3.4	3.4
Best (lb)	484.85	484.85	484.85	484.85
Average (lb)	N/A	488.45596	487.0637	485.7423
Stdev (lb)	N/A	8.5055357	3.052439	1.013263
No. of analyses	13523	5000	5000	5000
Constraint violations	None	None	None	None

Table 4. Comparison Optimization Result for 25-bar Problem (Case 2)

Variables	HS[8]	PSO	LDW-PSO	BBPSO
A1	0.01	0.01	0.01	0.01
A2-A5	2	2	2	2
A6-A9	3.6	3.6	3.6	3.6
A10-A11	0.01	0.01	0.01	0.01
A12-A13	0.01	0.01	0.01	0.01
A14-A17	0.8	0.8	0.8	0.8
A18-A21	1.6	1.6	1.6	1.6
A22-A25	2.4	2.4	2.4	2.4
Best (lb)	560.59	560.59	560.59	560.59
Average (lb)	N/A	567.7245	577.5186	561.1604
Stdev (lb)	N/A	11.67591	21.0032	1.475004
No. of analyses	7435	5000	5000	5000
Constraint violations	None	None	None	None

A comparison among the three algorithms is shown in Table 4 for Case 1 and in Table 5 for Case 2. As can be seen, there were no constraint violations for any of the algorithms. All algorithms obtained the same minimum weight (484.85 lb for Case 1 and 560.59 lb for Case 2). The BBPSO algorithm was the best PSO algorithm in terms of consistency. Figures 3 and 4 show that BBPSO demonstrated better convergence behavior. From a previous study, harmony search (HS) [8] obtained the same best results for Case 1 and Case 2 with PSO variants used in this study. However, to achieve this result, HS needed a greater number of analyses than BBPSO.

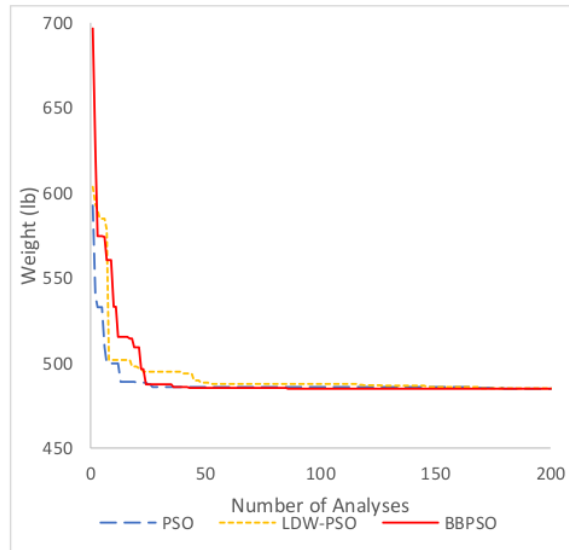


Figure 3. Convergence curves for 25-bar problem (case 1)

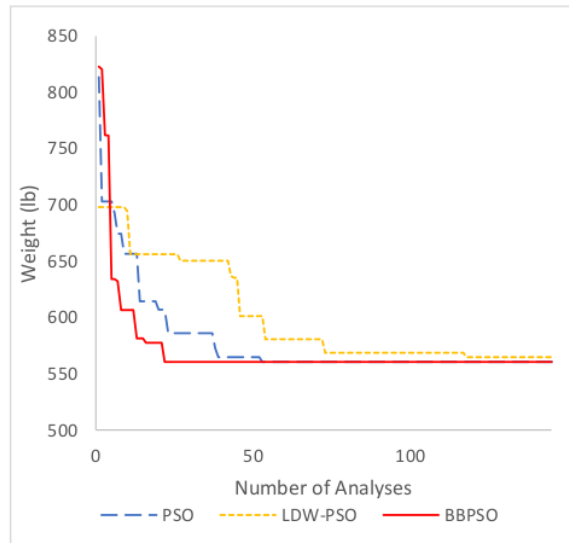


Figure 4. Convergence curves for 25-bar problem (case 2)

23

4.2. Spatial 72-bar truss structure

33

The 72-bar structure has 20 nodes and 60 degrees of freedom in X, Y, and Z directions. It comprises four identical floors as shown in Figure 5. The material density is 0.1 lb/in³ and elastic modulus 10 Msi. The stress limit for compression/tension is 25,000 psi and displacement should not be more than ±0.35 in. Each story has a different cross-section for its vertical, horizontal, wall-bracing, and floor-bracing trusses. In total, there are 16 groups: (1) A1–A4; (2) A5–A12; (3) A13–A16; (4) A17–A18; (5) A19–A22; (6) A23–A30; (7) A31–A34; (8) A35–A36; (9) A37–A40; (10) A41–A48; (11) A49–A52; (12) A53–A54; (13) A55–A58; (14) A59–A66; (15) A67–A70; and (16) A71–A72. As in load Case 2 in the 25-bar truss structure, the 72-bar truss structure was subjected to two load cases as described in Table 5.

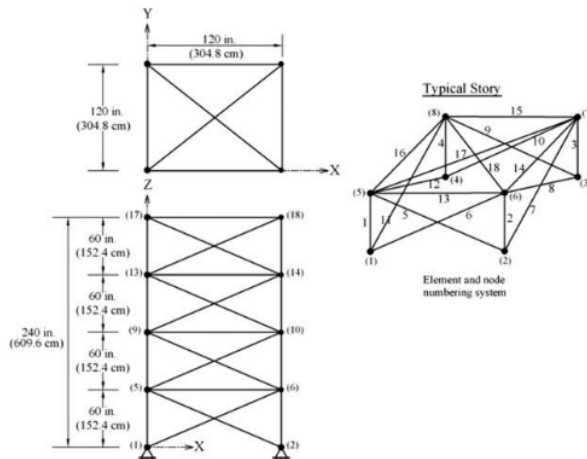


Figure 5. Spatial 72-bar truss structure model

Table 5. Comparison Optimization Result for 72-bar Problem

	6 Load Cases	Nodes	Loads		
			Px (kips)	Py (kips)	Pz (kips)
Case 1	1	17	5	5	-5
		18	0	0	0
		19	0	0	0
		20	0	0	0
	2	17	0	0	-5
		18	0	0	-5
		19	0	0	-5
		20	0	0	-5

Table 6. Comparison of Optimization Result for 72-bar Problem

Variables	HS[8]	PSO	LDW-PSO	BBPSO
A1-A4	1.9	2	1.9	1.9
A5-A12	0.5	0.5	0.5	0.5
A13-A16	0.1	0.1	0.1	0.1
A17-A18	0.1	0.1	0.1	0.1
19-A22	1.4	1.5	1.4	1.4
A23-A30	0.6	0.5	0.5	0.5
A31-A34	0.1	0.1	0.1	0.1
A35-A36	0.1	0.1	0.1	0.1
37-A40	0.6	0.6	0.5	0.5
A41-A48	0.5	0.5	0.5	0.5
A49-A52	0.1	0.1	0.1	0.1
A53-A54	0.1	0.1	0.1	0.1
A55-A58	0.2	0.2	0.2	0.2
A59-A66	0.5	0.5	0.6	0.6
A67-A70	0.3	0.5	0.4	0.4
A71-A72	0.7	0.6	0.6	0.6
Best	387.94	412.08	403.75	385.54
Average	N/A	456.6132	490.91	390.7881
Stdev	N/A	46.22298	64.38027	3.742455
No. of analyses	16044	5000	5000	5000
Constraint violations	None	None	None	None

Table 6 shows that BBPSO had the best performance and the smallest standard deviation. Each algorithm ran 50,000 structural analyses. The PSO, LDW-PSO, and BBPSO obtained minimum weights of 386.81 lb, 385.54 lb, and 385.54 lb, respectively. However, LDW-PSO had 2.1% less weight than PSO while LPSO had a larger standard deviation, showing less consistency. In terms of consistency, BBPSO had the best convergence behavior as shown in Figure 6. In this case study, HS[8] was outperformed by BBPSO even though HS had a greater number of analyses.

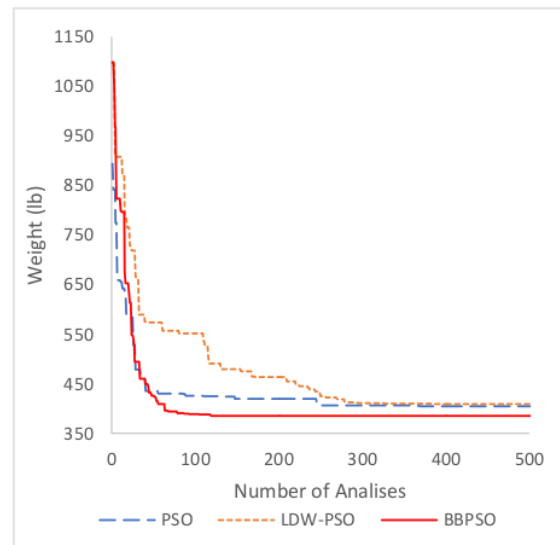


Figure 6. Convergence curves for 72-bar problem

5. Conclusion

This paper tested the variance in results of three PSO algorithms: BBPSO, LDW-PSO, and original PSO. The algorithms were presented with spatial truss problems coded using direct stiffness method. The results show BBPSO to be the best algorithm of the three tested algorithms. BBPSO had exceptional performance in terms of result, consistency, and convergence behavior. This is due to BBPSO having no pre-set parameters, which means that it is more adaptable to problems, whereas PSO and LDW-PSO contain pre-set variables. LPSO returned better results than the original PSO; however, LDW-PSO tends to have poorer convergence behavior. LDW-PSO performed more focused searches at the end of iteration due to its decreasing inertia weight, whereas PSO had the same coverage through each iteration. However, this could be a problem for convergence behavior because decreasing through the iteration means that LDW-PSO needs all iterations to find the optimum solution.

References

- [1] Tang, W., Tong, L., and Gu, Y. 2005 Improved genetic algorithm for design optimization of truss structures with sizing, shape and topology variables. *International Journal for Numerical Methods in Engineering* **62** 13 pp 1737–1762 DOI:10.1002/nme.1244
- [2] Talbi, E.-G. 2009 *Metaheuristics: from design to implementation* (John Wiley & Sons)
- [3] Cheng, M., Prayogo, D., Wu, Y., and Lukito, M. M. 2016 A Hybrid Harmony Search algorithm for discrete sizing optimization of truss structure. *Automation in Construction* **69** pp 21-33 DOI:10.1016/j.autcon.2016.05.023
- [4] Eberhart, R., and Kennedy, J. 1995 A new optimizer using particle swarm theory *MHS95 Proceedings of the Sixth International Symposium on Micro Machine and Human Science* DOI:10.1109/mhs.1995.494215
- [5] X. Zhao, H. Liu, D. Liu, W. Ai and X. Zuo 2016 *New Modified Bare-bones Particle Swarm Optimization* pp 416-422
- [6] J.Xin, G. Chen and Y. Hai 2009 A particle swarm optimizer with multi-stage linearly-decreasing inertia weight *Proceedings of the 2009 International Joint Conference on Computational Sciences and Optimization, CSO 2009* **1** pp 505-508

- [7] J.Guo and Y. Sato 2017 A Pair-wise Bare Bones Particle Swarm Optimization Algorithm for Nonlinear Functions, *International Journal of Networked and Distributed Computing* **5** 3 p 143
- [8] Lee, K. S., Geem, Z. W., Lee, S., & Bae, K. 2005 The harmony search heuristic algorithm for discrete structural optimization *Engineering Optimization* **37** 7 pp 663–684
DOI:10.1080/03052150500211895

Application of Metaheuristic Algorithms in Truss Structure Sizing Optimization

ORIGINALITY REPORT

23%

SIMILARITY INDEX

14%

INTERNET SOURCES

17%

PUBLICATIONS

10%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Dede, Tayfun, and Yusuf Ayvaz. "Combined size and shape optimization of structures with a new meta-heuristic algorithm", Applied Soft Computing, 2015. 2%

Publication
- 2 Kaveh, A., and V.R. Mahdavi. "Optimal Design of Truss Structures with Discrete Variables Using Colliding Bodies Optimization", Colliding Bodies Optimization, 2015. 2%

Publication
- 3 sigmaland.ir 2%

Internet Source
- 4 pure.hw.ac.uk 2%

Internet Source
- 5 core.ac.uk 2%

Internet Source
- 6 Habes Alkhrisat, Lamees Mohammad Dalbah, Mohammed Azmi Al-Betar, Mohammed A. Awadallah, Khaled Assaleh, Mohamed

1%

Deriche. "Size optimization of truss structures using improved grey wolf optimizer", IEEE Access, 2023

Publication

7	centaur.reading.ac.uk	1 %
Internet Source		
8	Submitted to Asian Institute of Technology	1 %
Student Paper		
9	Submitted to Hosei University	1 %
Student Paper		
10	www.cs.uoi.gr	1 %
Internet Source		
11	Submitted to Coventry University	1 %
Student Paper		
12	Y. Shi, R.C. Eberhart. "Empirical study of particle swarm optimization", Proceedings of the 1999 Congress on Evolutionary Computation-CEC99 (Cat. No. 99TH8406), 1999	1 %
Publication		
13	Jui-Sheng Chou, Dinh-Nhat Truong. "A novel metaheuristic optimizer inspired by behavior of jellyfish in ocean", Applied Mathematics and Computation, 2021	1 %
Publication		

14	Lijuan Li, Feng Liu. "Chapter 4 Harmony Particle Swarm Algorithm for Structural Design Optimization", Springer Science and Business Media LLC, 2009 Publication	1 %
15	S.O. Degertekin, L. Lamberti, I.B. Ugur. "Discrete sizing/layout/topology optimization of truss structures with an advanced Jaya algorithm", Applied Soft Computing, 2019 Publication	<1 %
16	download.atlantis-press.com Internet Source	<1 %
17	Submitted to Lehigh University Student Paper	<1 %
18	mdpi-res.com Internet Source	<1 %
19	researchspace.ukzn.ac.za Internet Source	<1 %
20	www.scielo.br Internet Source	<1 %
21	vdoc.pub Internet Source	<1 %
22	Adewumi, Aderemi Oluyinka, and Akugbe Martins Arasomwan. "An improved particle swarm optimiser based on swarm success rate for global optimisation problems",	<1 %

Journal of Experimental & Theoretical Artificial Intelligence, 2014.

Publication

23

Kaveh, A., R. Sheikholeslami, S. Talatahari, and M. Keshvari-Ilkhichi. "Chaotic swarming of particles: A new method for size optimization of truss structures", Advances in Engineering Software, 2014.

Publication

24

P Hajela, J Yoo. "Constraint handling in genetic search - A comparative study", 36th Structures, Structural Dynamics and Materials Conference, 1995

Publication

25

Ali Kaveh, Siamak Talatahari. "An enhanced charged system search for configuration optimization using the concept of fields of forces", Structural and Multidisciplinary Optimization, 2010

Publication

26

Kaveh, A., and V.R. Mahdavi. "Optimal Design of Truss Structures with Continuous Variables Using Colliding Bodies Optimization", Colliding Bodies Optimization, 2015.

Publication

27

Kaveh, A.. "A particle swarm ant colony optimization for truss structures with discrete

<1 %

<1 %

<1 %

<1 %

<1 %

variables", Journal of Constructional Steel Research, 200908/09

Publication

28

Wu, P.. "An improved particle swarm optimization algorithm for reliability problems", ISA Transactions, 201101

Publication

<1 %

29

ojs.petra.ac.id

Internet Source

<1 %

30

scholarworks.iupui.edu

Internet Source

<1 %

31

A. Kaveh. "Chapter 16 Water Evaporation Optimization Algorithm", Springer Science and Business Media LLC, 2017

Publication

<1 %

32

A. Baghlani, M. H. Makiabadi. "Weight optimization of truss structures by a new feasible boundary search technique hybridized with firefly algorithm", KSCE Journal of Civil Engineering, 2014

Publication

<1 %

33

A. Kaveh, R. Mahdipour Moghanni, S. M. Javadi. "Optimum design of large steel skeletal structures using chaotic firefly optimization algorithm based on the Gaussian map", Structural and Multidisciplinary Optimization, 2019

Publication

<1 %

Exclude quotes On

Exclude bibliography On

Exclude matches < 5 words

SURAT PERNYATAAN KLARIFIKASI KARYA ILMIAH

Yang bertandatangan di bawah ini:


N a m a	: Dr. Daniel Tjandra, S.T., M.Eng.
N I P	: 03-010
N I D N	: 0713078002
Jabatan Fungsional	: Lektor Kepala (400)
Pangkat/Golongan/	: Pembina / 4A
Program Studi	: Teknik Sipil
Fakultas	: Fakultas Teknik Sipil dan Perencanaan

Dengan ini menyatakan bahwa karya ilmiah yang saya tulis memiliki banyak kemiripan setelah dilakukan tes kemiripan dengan Turnitin dikarenakan kesulitan parafrase pada bagian dasar teori dan standar/spesifikasi uji material dari publikasi karya ilmiah yang telah dilakukan bersama tim. Demikian surat klarifikasi ini dibuat untuk digunakan mengurus kenaikan jabatan fungsional saya.


Surabaya, 5 Juni 2023

Yang membuat Pernyataan,

Mengetahui :
Rektor Universitas Kristen Petra



Prof. Dr. Ir. Djwantoro Hardjito, M.Eng.



Dr. Daniel Tjandra, S.T., M.Eng.