

The open access *IOP Conference Series: Earth and Environmental Science (EES)* provides a fast, versatile and cost-effective proceedings publication service.

Latest published conferences

Vol 1145



Go

Conference archive

2021



Go

View forthcoming volumes accepted for publication.

If you would like more information regarding *IOP Conference Series: Earth and Environmental Science* please visit conferenceseries.iop.org, and if you are interested in publishing a proceedings with IOP Conference Series please visit our page for conference organizers.

Conference organizers can use our online form and we will get in touch with a quote and further details.

Most read

Latest articles

JOURNAL LINKS

[Journal home](#)

[Journal scope](#)

[Information for organizers](#)

[Information for authors](#)

[Contact us](#)

[Reprint services from Curran Associates](#)





**244th
Electrochemical
Society Meeting**

October 8 – 12, 2023
Gothenburg, Sweden

50 symposia in
electrochemistry &
solid state science

Abstract submission
deadline:

April 7, 2023

Read the
call for papers &
**submit your
abstract!**

JOURNAL INFORMATION

2008-present

IOP Conference Series: Earth and Environmental Science

doi: 10.1088/issn.1755-1315

Online ISSN: 1755-1315

Print ISSN: 1755-1307



Table of contents

Volume 907

2021

◀ Previous issue Next issue ▶

Digital and Empathic Engagement in the New Era for Architecture and Civil Engineering 20-21 August 2021, Surabaya, Indonesia

Accepted papers received: 28 October 2021

Published online: 12 November 2021

Open all abstracts

Preface

OPEN ACCESS

011001

Preface

+ Open abstract



View article



PDF

OPEN ACCESS

011002

Peer review declaration

+ Open abstract



View article



PDF

Structural Engineering and Materials

OPEN ACCESS

012001

A comparative study of several bio-inspired algorithms in cost optimization of cellular beams

A Tjahjono, E J Wijayanti, D Prayogo and F T Wong

+ Open abstract



View article



PDF

OPEN ACCESS

012002

The study of shear wall uses in buildings during the architecture design process

Livian Teddy, Husnul Hidayat and Dessu Andriyali A

+ Open abstract



View article



PDF

OPEN ACCESS

012003

Modified Partial Capacity Design (M-PCD): achieving partial sidesway mechanism by using two steps design approach

L S Tanaya, H Herryanto and P Pudjisuryadi

+ Open abstract



View article



PDF

Open Access cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our

Privacy and Cookies policy

012004

Comparison reinforcement design shear wall modelling planar and assembly in elevator shaft

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012005

A comparative study of several nature-inspired algorithms in steel deck floor system cost optimization

T Emanuel, Hadrian, D Prayogo and F T Wong

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012006

Review of autonomous self-healing cementitious material

S A Susanto, D Hardjito and A Antoni

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012007

Alternative approach in Partial Capacity Design (PCD) by using predicted post-elastic story shear distribution

H Herryanto, L S Tanaya and P Pudjisuryadi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012008

The effect of crumb rubber in dense graded and open graded cold mixture asphalt

P S Wulandari and D Tjandra

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012009

Modeling and analysis of 3D-printed reinforced and prestressed concrete beams

J Chandra, H Wibowo, D Wijaya, F O Purnomo, P Pudjisuryadi and A Antoni

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012010

Optimization of concentrically braced steel frame structures based on SNI 1726:2019, SNI 1727:2020, SNI 1729:2020, and AISC 341-16

J Aloysius, J A Sumito, D Prayogo and H Santoso

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012011

Investigation of the material mixtures and fiber addition for 3D concrete printing

A Antoni, A Agraputra, D Teopilus, A H Sunaryo, M M Mulyadi, P Pudjisuryadi, J Chandra and D Hardjito

[+ Open abstract](#) [View article](#) [PDF](#)

Building Science and Technology

PAPER • OPEN ACCESS

The effect of crumb rubber in dense graded and open graded cold mixture asphalt

To cite this article: P S Wulandari and D Tjandra 2021 *IOP Conf. Ser.: Earth Environ. Sci.* **907** 012008

View the [article online](#) for updates and enhancements.

You may also like

- [Feasibility of crumb rubber as fine aggregate in concrete](#)
R Irmawaty, N M Noor and A A Muhaimin
- [Mechanical properties of Cold Recycled Bituminous Mixes with Crumb Rubber](#)
Andrea Castro, Jaime Preciado, Gilberto Martinez-Arguelles et al.
- [Design and Properties of Thin Surfacing Hot Mix Asphalt Containing Crumb Rubber as Partial Aggregate Replacement](#)
Ary Setyawan, Nugroho Febrianto and Djoko Sarwono



IOP Publishing

ENVIRONMENTAL RESEARCH 2021

A VIRTUAL CONFERENCE
15-19 NOVEMBER

FREE TO
ATTEND

REGISTER
NOW



Regional Science

Publish Open Access

Reach a global audience by publishing your geography research Open Access.

tandfonline.com

OPEN

IOP Conference Series: Earth and Environmental Science

COUNTRY

United Kingdom



Universities and research
institutions in United Kingdom

SUBJECT AREA AND CATEGORY

Earth and Planetary Sciences

Earth and Planetary Sciences (miscellaneous)

Environmental Science

Environmental Science (miscellaneous)

PUBLISHER

IOP
Publishing
Ltd.

H-INDEX

26



PUBLICATION TYPE

Conferences and Proceedings

ISSN

17551307, 17551315

COVERAGE

2010-
2020

INFORMATION

[Homepage](#)

[How to
publish in
this journal](#)

[ees@ioppubl
ishing.org](mailto:ees@ioppublishing.org)

Regional Science - Publish Open Access

Make an impact. tandfonline.com

Voucher Oktober special 40%


Dapatkan voucher 40% Untuk pembelian Frame dan sunglasses hingga 25 November 2021

Visit Site



SCOPE

The open access IOP Conference Series: Earth and Environmental Science (EES) provides a fast, versatile and cost-effective proceedings publication service.

 Join the conversation about this journal




International Conferences 2021

International Conference on Marine Science and Aquaculture


Conference Alerts



SJR





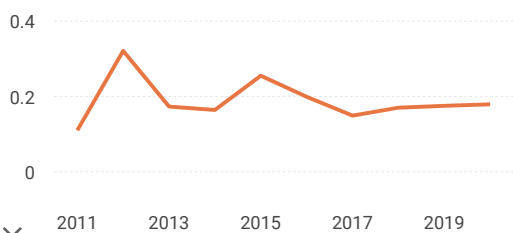


Total Documents

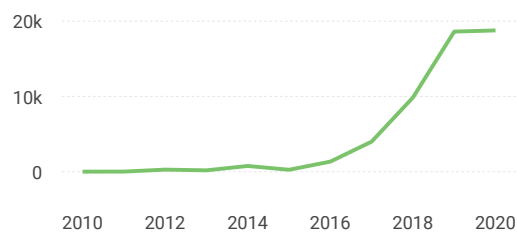

Regional Science - Publish Open Access

Make an impact. tandfonline.com

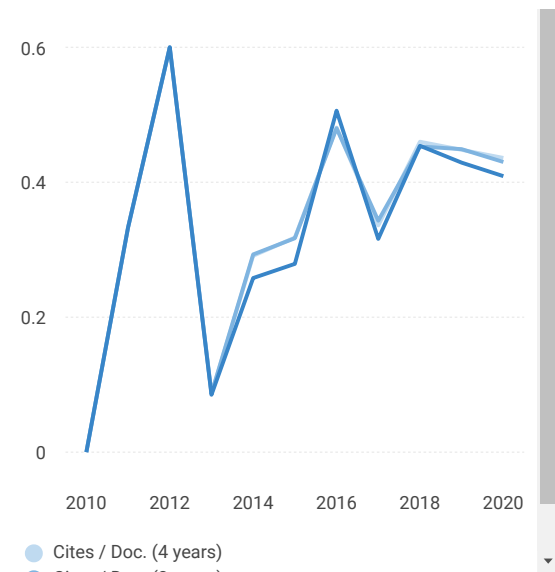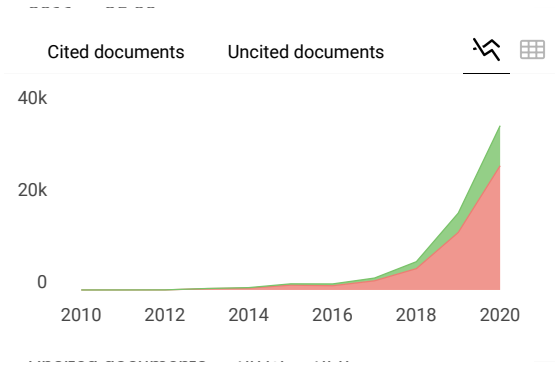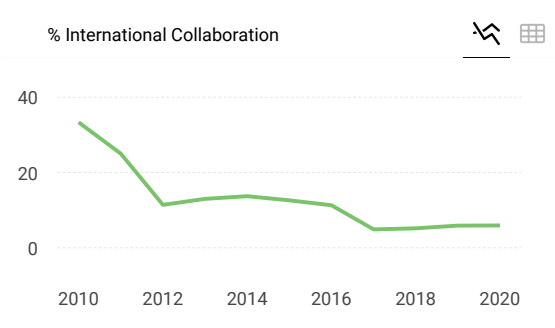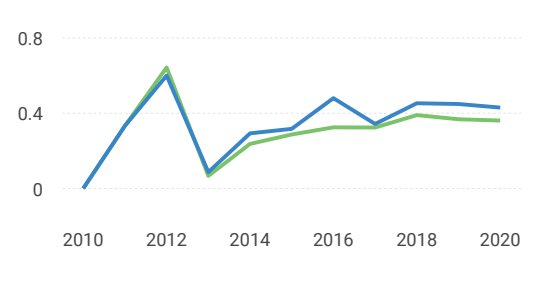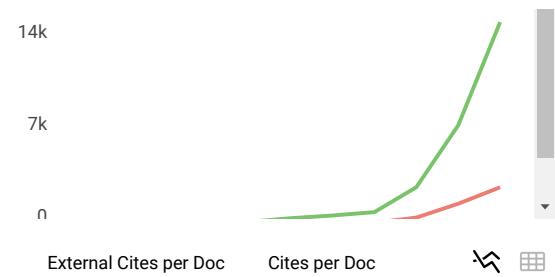

IOP Conference Series: Earth and Environmental...

Not yet assigned quartile

SJR 2020
0.18

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:


```
<a href="https://www.scimag
```



SCImago Graphica


Explore, visually communicate and make sense of data with our **new free tool**.

Get it

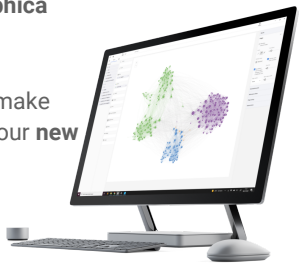

Regional Science - Publish Open Access

Make an impact. tandfonline.com



Impact factor 7.97, low cost

Open

IJCRT Research Journal

Metrics based on Scopus® data as of April 2021

A
Alharia Dinata
7 months ago

IOP Conference Series: Earth and Environmental Science - Volume 708 is not available in Scopus.

reply



Melanie Ortiz
7 months ago

SCImago Team

Dear Alharia,
thank you very much for your comment, unfortunately we cannot help you with your request. We suggest you contact Scopus support:
https://service.elsevier.com/app/answers/detail/a_id/14883/kw/scimago/supporthub/scopus/
Best Regards, SCImago Team

V
Vani
7 months ago

good evening, whether this journal is Q4 or Q2 ?

reply



Melanie Ortiz
7 months ago

SCImago Team

Dear Vani,
Thank you for contacting us.
As said below, we calculate the SJR data for all the publication's types, but the Quartile's data are only calculated for Journals and Book Series.
Best regards, SCImago Team

F
FEROSKHAN M
1 year ago

IOP Conference Series: Earth and Environmental Science - Volume 570 is not available in Scopus.



SCImago Team

Melanie Ortiz 1 year ago

Dear Sir/Madam,
thank you very much for your comment, unfortunately we cannot help you with your request. We suggest you contact Scopus support:
https://service.elsevier.com/app/answers/detail/a_id/14883/kw/scimago/supporthub/scopus/
Best Regards, SCImago Team

N **Natt** 1 year ago

I would like to know the quartile of this journal. Why isn't it showing on the website?

reply



SCImago Team

Melanie Ortiz 1 year ago

Dear Natt,
Thank you for contacting us. We calculate the SJR data for all the publication's types, but the Quartile's data are only calculated for Journals and Book Series.
Best regards, SCImago Team

N **Nurgustaana** 2 years ago

Dear SCImago Team!
I want to know previous quartiles of journal (for 2018 and 2019 years). I have tried find information about a quartile, but discovered just SJR for 2018. Could you please provide information about it?
Yours sincerely, Nurgustaana

reply



SCImago Team


Melanie Ortiz 2 years ago

Dear Nurgustaana,
Thank you for contacting us. We calculate the SJR data for all the publication types, but the Quartile data are only calculated for Journal type's publications. Best regards,
SCImago Team

M **Mora** 2 years ago

hello, how to search one of journal who publised by IOP, because when i find it by the title, they are not able in scimagojr but the publisher is available in here, thank you for the respond it means a lot

reply





Melanie Ortiz 2 years ago

SCImago Team

Dear Mora,

thank you for contacting us. Could you provide us the Title of the journal? We remember that SCImago Journal & Country Rank shows all the information have been provided by Scopus. If you didn't localize the journal in the search engine, it means that Scopus / Elsevier has not provided us the corresponding data.

Best Regards, SCImago Team

D **Dr. Yousif** 2 years ago

Dear Sir,

I have published a paper in Earth and Environmental Science Journal (only myself, single author) I am trying to withdraw it after 28 days of publishing online, is it possible? Could you please tell me the procedure of withdrawing a paper?

Thank you,

reply



Melanie Ortiz 2 years ago

SCImago Team

Dear Yousif,

thank you for contacting us.

We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to contact the journal's editorial staff , so they could inform you more deeply. Best Regards, SCImago Team

A **Agustinus Kastanya** 2 years ago

need information about renking of the Journal on Scopus


reply



Melanie Ortiz 2 years ago

SCImago Team

Dear Agustinus, thank you very much for your comment, unfortunately we cannot help you with your request. We suggest you to consult the Scopus database directly. Remember that the SJR is a static image of a database (Scopus) which is changing every day. Best regards, SCImago Team



Dear Admin,

How could our journal include in your IOP?

reply



Melanie Ortiz 2 years ago

SCImago Team

Dear Mahipal,
thank you for contacting us.
We suggest you to contact the IOP's editorial staff , so they could inform you more deeply.
If you would like to make an application to Scopus, please contact them to help you with
this issue here: <https://www.elsevier.com/solutions/scopus/content/content-policy-and-selection>
<http://suggestor.step.scopus.com/suggestTitle/step1.cfm>
Best Regards, SCImago Team

M **Mursalin** 2 years ago

Dear SCImago Team

My name is mursalin from Jambi City, Indonesia. I have published my article titled The Effect of Temperature on MDAG Purification Using Creaming Demulsification Technique at the IOP Conference Series: Earth and Environmental Science, Volume 309, conference 1 and could be accessed at: <https://iopscience.iop.org/article/10.1088/1755-1315/309/1/012068>. But why until now it does not appear into Google Scholar and my account.

Please help me to resolve the issue. Thank you for your kindness. I am waiting for good news from you.

Sincerelly,
Mursalin

reply



Melanie Ortiz 2 years ago

SCImago Team

Dear Mursalin,

Thank you for contacting us. Unfortunately, we can not help you with your request. Maybe other users can help you. Best Regards, SCImago Team

N **Танзиля Созаева** 2 years ago



Melanie Ortiz 2 years ago

SCImago Team

Dear user, thank you very much for your request. You can consult that information in SJR website. Best Regards, SCImago Team

S **syaiful** 3 years ago

I am very interested to send my paper to this conference

best regards

syaiful

reply



Elena Corera 3 years ago

SCImago Team

Dear user, in the link below you will find the information corresponding to the author's instructions of this journal. Best regards, SCImago Team
<https://publishingsupport.iopscience.iop.org/author-guidelines-for-conference-proceedings/>

Leave a comment

Name

Email

(will not be published)



I'm not a robot

reCAPTCHA
[Privacy](#) - [Terms](#)

Submit



Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2020. Data Source: Scopus®

EST MODUS IN REBUS

Horatio (Satire 1.1.106)

Regional Science - Publish Open Access

Make an impact. tandfonline.com



The effect of crumb rubber in dense graded and open graded cold mixture asphalt

P S Wulandari^{1,2} and D Tjandra¹

¹ Civil Engineering Department, Petra Christian University, Surabaya, Indonesia

² Corresponding author: paravita@petra.ac.id

Abstract. Recycling tires is one of the eco-friendly way for reducing environmental problems. Incorporating crumb rubber in asphalt mixtures is an alternative way for reusing the end-of-life tires in road construction. The main purpose of this study is to evaluate the cold mix asphalt incorporating crumb rubber as a substitute for a part of fine aggregates. In this study, the aggregate gradations for mix design were selected according to the specification, Dense Graded Emulsion Mixtures (DGEM) Type IV and Open Graded Emulsion Mixtures (OGEM) Type E/20. The design bitumen content in this study was optimized for stability, void in mixture (porosity), and density. Crumb Rubber (CR) emulsion mixtures were made with optimum bitumen content at 8% by mass of total mixture for DGEM and OGEM. In order to incorporate crumb rubber into the cold emulsion mixtures, laboratory testing were performed for 25% and 50% of fine aggregates replaced with an equal volume of crumb rubber. In general, CR emulsion mixtures showed good results in all parameters. The CR emulsion mixtures also had a good comparison to hot mix asphalt specification for medium volume traffic loads with porosity less than 10%. From this study, crumb rubber can be recommended as a substitution material of fine aggregates in cold mix asphalt.

1. Introduction

Cold mix asphalt (CMA) is a combination of aggregates and bitumen emulsion. CMA are produced by mixing unheated aggregates with bitumen emulsion at ambient temperatures. Bitumen emulsion is a liquid product, which also does not need to heat before the mixing process of CMA. Since this mixing process does not require heating, CMA are good for environment and has great energy savings during mixing process. CMA may be suitable for use in local roads where hot mix asphalt installation are unavailable. Many researches have been done on CMA with promising results to be applied as flexible pavement [1,2,3,4].

Generally, crumb rubber (CR) is produced from waste tires. Recycling tires is one of the eco-friendly way for reducing environmental problems. Incorporating crumb rubber in asphalt mixtures are an alternative way for reusing the end of life tires in road construction. Crumb rubber asphalt mixtures have been widely studied and have numbers of prospective results [1,2,5,6,7,8]. The main purpose of this study is to evaluate the cold mix asphalt incorporating crumb rubber as a substitute for a part of fine aggregate.



2. Materials description and testing procedures

2.1. Materials

The aggregate used in this study was supplied from Banyuwangi quarry, East Java, Indonesia. CMA in this study used cationic slow setting bitumen emulsion (CSS1-h) produced by Triasindomix company. Table 1 shows the properties and specifications of a bitumen emulsion CSS-1h. The residue content of the emulsion was 63.46%. Several laboratory tests were conducted to determine the properties of aggregate. Table 2 shows the physical properties and specifications of aggregates and meet the specifications. Fly ash Type C as filler material was taken from PLTU Paiton, passed through a 0.075 mm sieve (No. 200). In this study, crumb rubber produced by Pura Agung with mesh size #20 (0.841 mm), was incorporated into CMA to substitute 25% and 50% of fine aggregates in the mixtures.

Table 1. Properties and specifications of bitumen emulsion CSS-1h.

Properties	Units	Method	Results	Specifications
Test on Emulsions				
Viscosity, Saybolt-Furol at 25° C	second	SNI 03-6721	23.275	20-100
Storage stability, 24 hours	%	SNI 03-6828	0.33	1 max.
Particle charge	-	SNI 03-3644	Positive	Positive
Sieve test, retained on No. 20	%	SNI 03-3643	0.00	0.10 max.
Distillation				
Residue	%	SNI 03-3642	63.46	57 min.
Test on Residue from Distillation test				
Penetration at 25° C, 100g, 5 sec	0.1 mm	SNI 06-2456	51.60	40-90
Ductility at 25° C, 5 cm/min	cm	SNI 06-2432	107	40 min.
Solubility in trichloroethylene	%	SNI 06-2438	98.992	97.5 min.

Table 2. Physical properties of aggregates.


Properties	Units	Method	Results			Specifications
			F1	F2	F3	
Specific gravity, bulk	-		2.534	2.772	2.523	-
Specific gravity, SSD	-		2.580	2.820	2.548	-
Specific gravity, apparent	-		2.644	2.908	2.587	-
Water absorption	%		1.650	1.680	0.977	3 max.
Los Angeles Abrasion	%	SNI 2417	36	39	-	40 max.

2.2. Sample preparations and mix designs

In this study, the aggregate gradations for mix design were selected according to the specification, Dense Graded Emulsion Mixtures (DGEM) Type IV and Open Graded Emulsion Mixtures (OGEM) Type E/20. The aggregate gradation for DGEM and OGEM are given in Table 3 and Table 4. Figure 1 shows that the aggregate gradation are within the limits according to the specification limits of the Department of Public Works of Indonesia [7]. Fly ash as filler material (2% by weight of total aggregates) were incorporated into emulsion mixtures to improve the early age strength of the mixtures. Crumb rubber was incorporated directly in the mixture based on dry process by volumetric replacement of fine aggregates in the designed emulsion mixtures. Different percentages of Crumb rubber, 25% and 50%, were then analyzed.

Table 3. Aggregate gradations for DGEM (IV).

Sieve size		Coarse Aggregate (F1) 10-15 mm	Medium Aggregate (F2) 5-10 mm	Fine Aggregate (F3) 0-5 mm	Filler (Fly Ash Type C)	Combined Aggregate	Specifications
No	mm	23%	32%	43%	2%		DGEM (IV)
¾ inch	19	23.00	32.00	43.00	2.00	100.00	100
½ inch	12.5	14.16	32.00	43.00	2.00	91.16	90-100
4	4.75	0.39	11.73	42.75	2.00	56.88	45-70
8	2.36	0.35	2.68	35.39	2.00	40.43	25-55
50	0.3	0.00	1.56	11.53	2.00	15.09	5-20
200	0.075	0.00	1.09	4.81	2.00	7.90	2-9

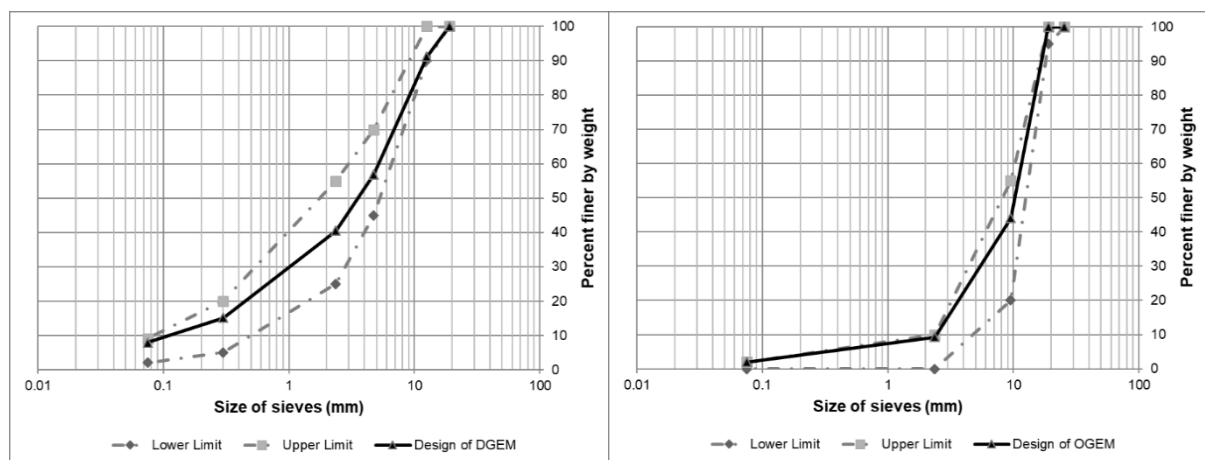**Figure 1.** Aggregate gradation for dense (DGEM) and open (OGEM) graded design mixtures.**Table 4.** Aggregate gradations for OGEM (E/20).

Sieve size		Coarse Aggregate (F1) 10-15 mm	Medium Aggregate (F2) 5-10 mm	Fine Aggregate (F3) 0-5 mm	Filler (Fly Ash Type C)	Combined Aggregate	Specifications
No	mm	68%	24%	6%	2%		OGEM (E/20)
1 inch	25.4	68.00	24.00	6.00	2.00	100.00	100
¾ inch	19	68.00	24.00	6.00	2.00	100.00	95-100
3/8 inch	9.5	12.10	24.00	6.00	2.00	44.10	20-55
8	2.36	0.68	1.68	4.91	2.00	9.26	0-10
200	0.075	0.00	0.00	0.00	2.00	2.00	0-2

3. Results and discussion

3.1. Determination of optimum bitumen content for emulsion mixtures

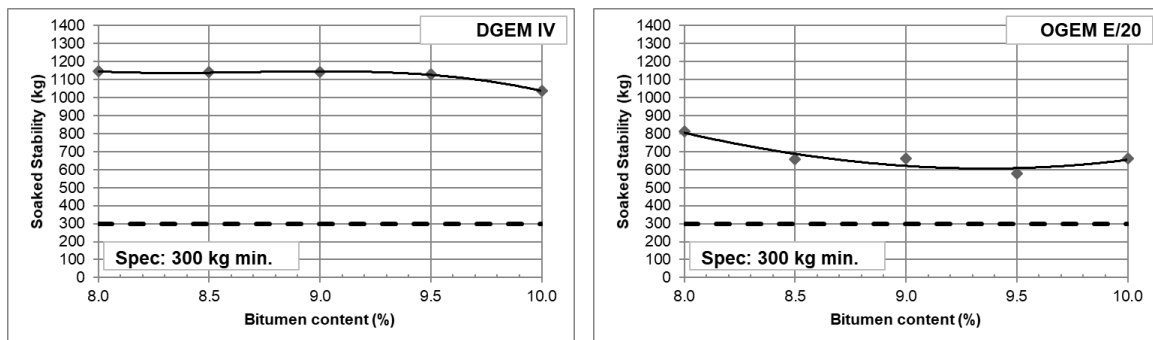
Table 5 and Table 6 shows the cold mix design results for DGEM and OGEM, three specimens were prepared at five variations of bitumen content for DGEM and OGEM. All the specimens were prepared for Marshall testing in standard molds with 75 blows Marshall hammer on each side of the specimen in room temperature.

Table 5. Results of mix design for DGEM (IV).

Properties	Units	Bitumen content (%)					Specifications
		8	8.5	9	9.5	10	
Soaked Stability	kg	1145	1142	1141	1130	1036	300 min.
Void in Mixture (VIM)	%	6.9	7.4	8.3	8.5	5.3	5 – 10
Density	gram/cm ³	2.192	2.165	2.131	2.111	2.169	
Void in Mineral Aggregate (VMA)	%	23	24	26	27	25	-
Void Filled with Bitumen (VFB)	%	69	69	68	68	79	-
Asphalt Film Thickness (AFT)	μm	16	17	18	19	21	8 min.

Table 6. Results of mix design for OGEM (E/20).

Properties	Units	Bitumen content (%)					Specifications
		8	8.5	9	9.5	10	
Soaked Stability	kg	812	659	663	580	662	300 min.
Void in Mixture (VIM)	%	4.6	4.3	3.5	3.0	2.2	-
Density	gram/cm ³	2.244	2.235	2.237	2.234	2.237	-
Void in Mineral Aggregate (VMA)	%	20	21	21	22	22	-
Void Filled with Bitumen (VFB)	%	77	80	83	86	90	-
Asphalt Film Thickness (AFT)	μm	44	48	51	54	58	8 min.

**Figure 2.** Stability of mix design for DGEM and OGEM.

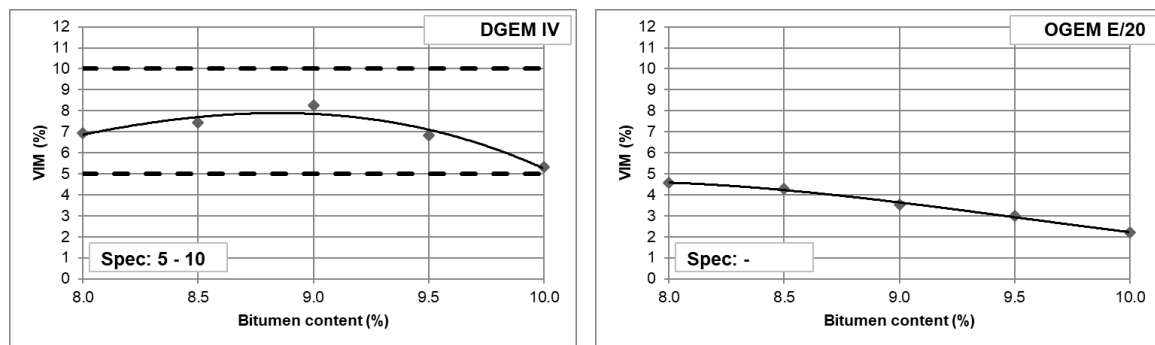


Figure 3. Void in Mixture (VIM) of mix design for DGEM and OGEM.

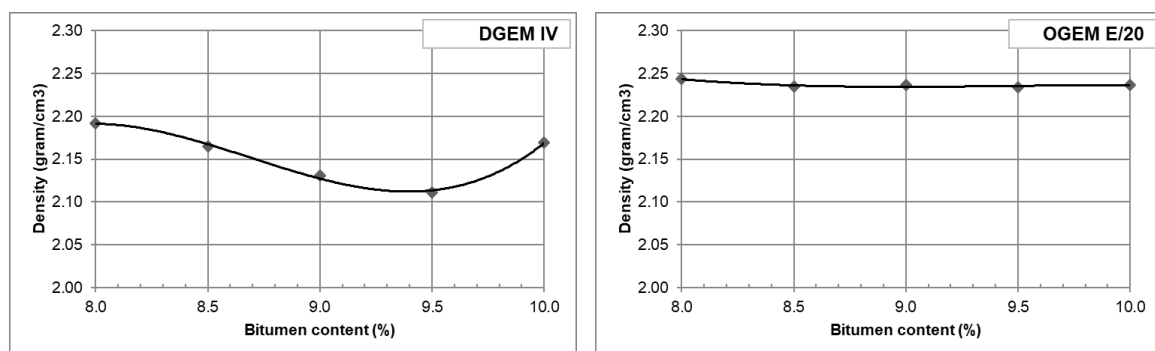


Figure 4. Density of mix design for DGEM and OGEM.

The design bitumen content in this study was optimized for stability, void in mixture (VIM), and density. According to the result shown in Figure 2, the maximum stability was reached at mix design for bitumen content of 8% for DGEM and OGEM. The porosity (VIM) of DGEM were also met the requirement in specification, and the porosity for OGEM is not specified in specification (Figure 3). Density of DGEM and OGEM were reached the maximum value for bitumen content of 8%, as shown in Figure 4. Considering these results, it was determined that the optimum bitumen content was at 8% by mass of total mixture for DGEM and OGEM.

3.2. Performances of Crumb Rubber emulsion mixtures

Crumb Rubber (CR) emulsion mixtures were made with optimum bitumen content at 8% by mass of total mixture for DGEM and OGEM. In order to investigate the performance of crumb rubber emulsion mixtures, laboratory testing were performed for 25% and 50% of fine aggregates replaced with an equal volume of crumb rubber. All factors in mixtures were keeping constant. The performances of CR emulsion mixtures were also observed at 7 days of curing time in room temperature due to emulsion mixtures has low early age strength.

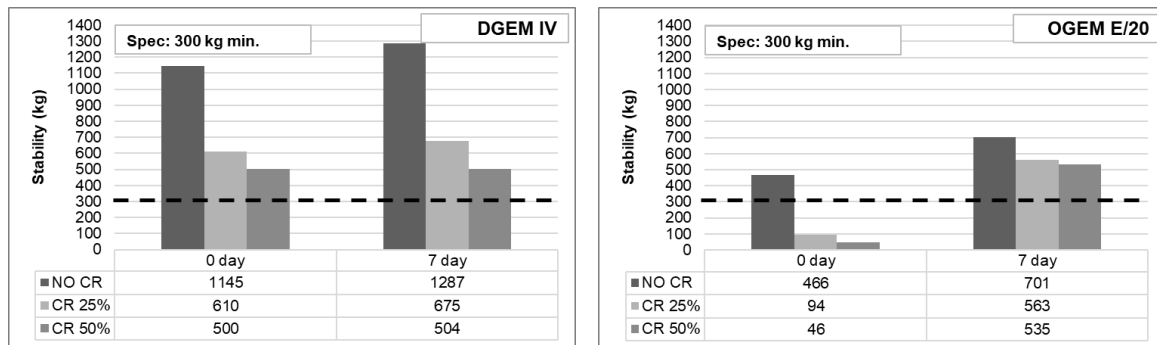


Figure 5. The effect of crumb rubber content on stability of emulsion mixtures.

Stability tends to increase with an increase in curing time, as shown in Figure 5 because CMA required longer curing times. Although the use of recycled crumb rubber reduced the stability of CMA about 50%, but still met the minimum requirement as in standard specification for 7 days curing time. The dense graded CMA produced the higher stability than OGEM. However, using of crumb rubber significantly improved the stability of open graded crumb rubber CMA after 7 days of curing time.

The CR emulsion mixture also produced the required value of porosity (VIM) as in standard specification. Results indicated that porosity (VIM) of the emulsion mixtures increased as the amount of crumb rubber increased. This condition occurred due to the CR emulsion mixtures had become stiffer made mixture hard to compact. The results (Figure 7) showed that at 7 day of curing time the more crumb rubber content in open graded emulsion mixtures produced better void in mixtures, which reached the requirement in specification.

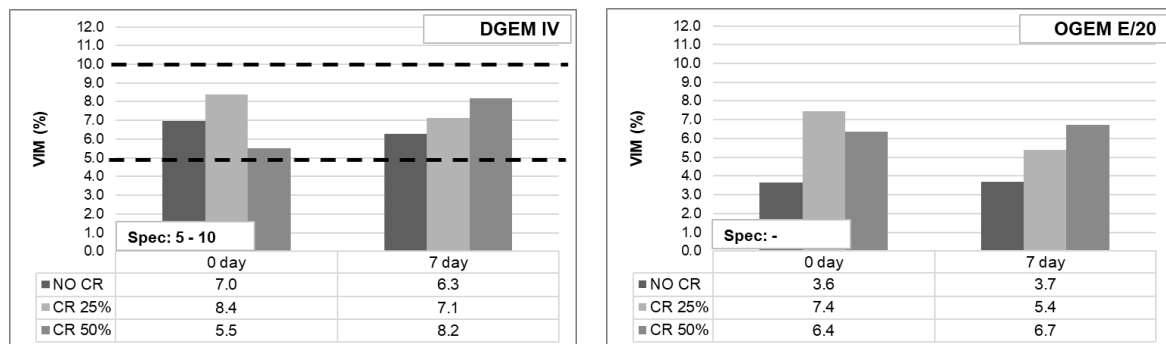


Figure 6. The effect of crumb rubber content on porosity (VIM) of emulsion mixtures

The CR emulsion mixtures tend to decrease the mixture density at 7 days of curing time as shown in Figure 7. Along with the porosity (VIM) increases, the density of CR emulsion mixtures decreases. When the porosity of the emulsion mixture increases, it was found that the water absorption also increases (Figure 8). Porous mixtures allow water to pass through the pores.

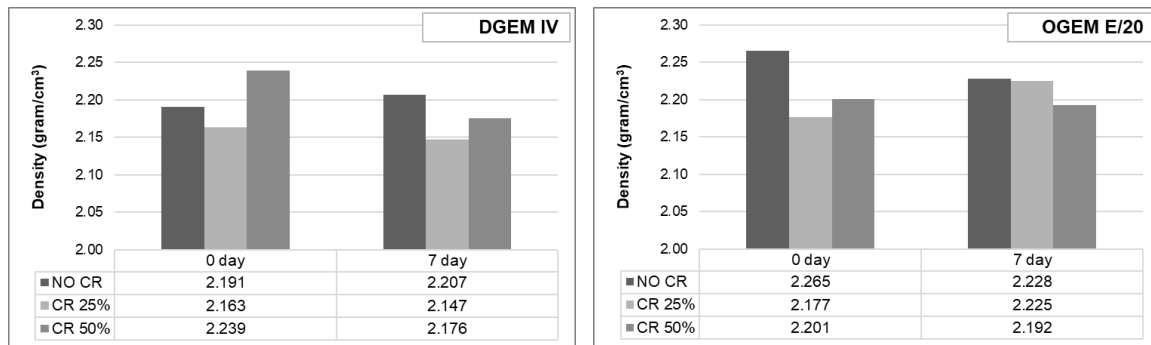


Figure 7. The effect of crumb rubber content on density of emulsion mixtures

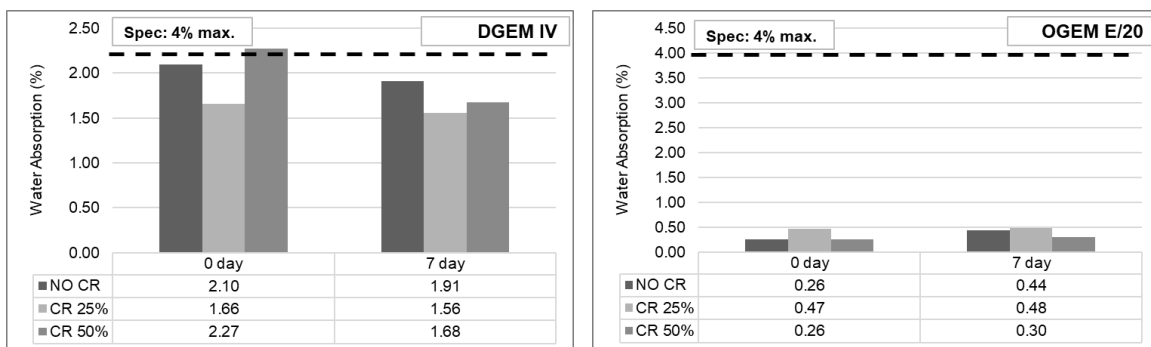


Figure 8. The effect of crumb rubber content on water absorption of emulsion mixtures

In general, CR emulsion mixtures showed good results in all parameters. The emulsion mixtures at 7 days of curing time also had a good comparison to HMA specification with porosity less than 10%, as SS, HRS-A and AC-WC, as shown in Table 7 (for dense graded mixtures) and table 8 (for open graded mixtures). Therefore, CR emulsion mixtures could be considered as an alternative mixture to be applied as flexible pavement for medium volume traffic loads. The benefit of CR emulsion mixtures are that this mixture does not need heat during the mixing process and the use of recycling of waste tires, also give contribution to the environment concern.

Table 7. Comparison of dense graded emulsion mixtures (DGEM) to HMA specifications.

Properties	7 days of curing			DGEM Type IV	Specifications		
	No CR	CR 25%	CR 50%		SS-A ¹	HRS-A ²	AC-WC ³
Soaked Stability (kg)	1287	675	504	300 min.	200 min.	450 min.	800 min.
Retained Stability (%)	92	85	77	50 min.	75 min.	75 min.	75 min.
VIM (%)	6.3	7.1	8.2	5 - 10	3 - 9	4 - 6	3 - 5
Density (gram/cm ³)	2.21	2.15	2.18	-	-	-	-
Water Absorption (%)	1.91	1.56	1.68	4 min.	-	-	-
VMA (%)	22	23	24	-	20 min.	18 min.	15 min.
VFB (%)	71	69	65	-	75 min.	68 min.	65 min.
MQ (kg/mm)	267	95	83	-	80 min.	250 min.	250 min.
BFT (mm)	19	23	28	8 min.	8 min.	8 min.	8 min.

Note: ¹Sand Sheet (SS-A); ²Hot Rolled Sheet Wearing Course (HRS-A); ³Asphalt Concrete Wearing Course (AC-WC)

Table 8. Comparison of open graded emulsion mixtures (OGEM) to HMA specifications.

Properties	7 days of curing			OGEM E-20	Specifications		
	No CR	CR 25%	CR 50%		SS-A ¹	HRS-A ²	AC-WC ³
Soaked Stability (kg)	701	563	535	300 min.	200 min.	450 min.	800 min.
Retained Stability (%)	61	84	77	50 min.	75 min.	75 min.	75 min.
VIM (%)	3.7	5.4	6.7	-	3 - 9	4 - 6	3 - 5
Density (gram/cm ³)	2.228	2.225	2.192	-	-	-	-
Water Absorption (%)	0.443	0.477	0.299	-	-	-	-
VMA (%)	19	21	22	-	20 min.	18 min.	15 min.
VFB (%)	74	74	69	-	75 min.	68 min.	65 min.
MQ (kg/mm)	106	50	60	-	80 min.	250 min.	250 min.
BFT (mm)	25	25	26	20 min.	8 min.	8 min.	8 min.

Note: ¹Sand Sheet (SS-A); ²Hot Rolled Sheet Wearing Course (HRS-A); ³Asphalt Concrete Wearing Course (AC-WC)

4. Conclusions

From this study, crumb rubber can be recommended as a substitution material of fine aggregates in cold mixture asphalt, for dense and open graded emulsion mixtures. After 7 days of curing time, crumb rubber emulsion mixtures for dense and open graded emulsion mixtures have the promising results and comparable to conventional hot mixture asphalt. It has been shown that at 50% crumb rubber substitution for both type of emulsion mixtures, the CR emulsion mixtures still reached the stability values that meet the standard specification for medium volume traffic loads with porosity less than 10%. Substitution of fine aggregate with crumb rubber on CMA is expected to overcome the environmental problems by using the recycles material from used tires to preserve the natural aggregates. Besides the CMA itself is also eco-friendly mixtures as the mixing process done at ambient temperature.

Acknowledgement

The authors gratefully acknowledge the following people in our research group for the contribution to finalize this research; Indra Kristanto, Aldo Lodi Nugraha, Kevin Ronaldo Gotama, Yoel Wuisan, Ken and Arianto Thesman.

References

- [1] Wulandari P S, Kertorahardjo K, Thesman A, and Tjandra D 2019 Effect of Crumb Rubber as Fine Aggregate Replacement in Cold Mixture Asphalt *Civil Engineering Dimension* **21**(2) 107 – 112
- [2] Wulandari P S and Tjandra D 2019 The use of crumb rubber for replacing fine aggregate in cold mixture asphalt *IOP Conference Series: Materials Science and Engineering* **615** 1 – 6
- [3] Thanaya I N A, Negara I N W, and Suarjana I P 2014 Properties of Cold Asphalt Emulsion Mixtures (CAEMs) using materials from old road pavement milling *Procedia Engineering* **95** 479 – 488
- [4] Thanaya I N A 2007 Review and Recommendation of Cold Asphalt Emulsion Mixtures (CAEMs) Design *Civil Engineering Dimension* **9**(1) 49 – 56 Picado-Santos L G, Capitão S D, and Neves J M C 2020 Crumb rubber asphalt mixtures: A literature review *Construction and Building Materials* **247** 1 – 13
- [5] Santos L G P, Capitao S D, and Dias J L F 2019 Crumb rubber asphalt mixtures by dry process: Assessment after eight years of use on a low/medium trafficked pavement *Construction and Building Materials* **215** 9 – 21

- [6] Ismail B I and Xiaoming H 2019 Modification of the dry method for mixing crumb rubber modifier with aggregate and asphalt based on the binder mix design *Construction and Building Materials* **220** 278 – 284
- [7] Wulandari P S and Tjandra D 2017 Use of Crumb Rubber As An Additive in Asphalt Concrete Mixture *Procedia Engineering* **171** 1384 – 1389
- [8] Pettinari M and Simone 2015 A Effect of crumb rubber gradation on a CR cold recycled mixture for road pavements *Materials & Design* **85** 598 – 606
- [9] Directorate Generals of Highways 1991 *Specifications of Cold Asphalt Emulsion Mixtures* (Public Works Department Jakarta)