

The open access *IOP Conference Series: Earth and Environmental Science (EES)* provides a fast, versatile and cost-effective proceedings publication service.

Latest published conferences

Vol 1094



Go

Conference archive

2022



Go


View forthcoming volumes accepted for publication.

If you would like more information regarding *IOP Conference Series: Earth and Environmental Science* please visit conferenceseries.iop.org, and if you are interested in publishing a proceedings with IOP Conference Series please visit our page for conference organizers.

Conference organizers can use our online form and we will get in touch with a quote and further details.

Most read

Latest articles



OXFORD
INSTRUMENTS

WITec | **Whitepaper** | Looking into Batteries with Ra

Correlative RISE Microscopy Studies of Li-ion Cells

view whitepaper

JOURNAL LINKS

[Journal home](#)

[Journal scope](#)

[Information for organizers](#)

[Information for authors](#)

[Contact us](#)

[Reprint services from Curran Associates](#)

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our [Privacy and Cookies policy](#).





JOURNAL INFORMATION

2008-present

IOP Conference Series: Earth and Environmental Science

doi: 10.1088/issn.1755-1315

Online ISSN: 1755-1315

Print ISSN: 1755-1307

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



Table of contents

Volume 1094

2022

◀ Previous issue

4th International Conference on Environment, Resources and Energy Engineering (EREE 2022)
10/06/2022 - 12/06/2022 Online

Accepted papers received: 13 September 2022

Published online: 27 September 2022

Open all abstracts

Preface

OPEN ACCESS 011001

Preface to EREE 2022

+ Open abstract  View article  PDF

OPEN ACCESS 011002

Peer Review Statement

+ Open abstract  View article  PDF

Resource & Environment Management and Sustainable Development

OPEN ACCESS 012001

Quantification and characterization of household waste in Dumai Timur District, Dumai City, Riau, Indonesia as a measure towards circular economy.

Fauzan Hidayat, Dwi Nowo Martono and Udi Syahnoedi Hamzah

+ Open abstract  View article  PDF

OPEN ACCESS 012002

Design of groundwater monitoring network for coastal aquifers based on seawater intrusion vulnerability: A case study of Mandaue City, Philippines

B Condor, C Patiño and J Sinogaya

+ Open abstract  View article  PDF

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



OPEN ACCESS

012003

Green energy and environmental sustainability on Vernacular Architecture. The case of Ayllus of Atacama Desert and stilt houses of Chiloé

Stefania Pareti, Vicente Valdebenito, Loreto Rudolph and Claudia Bustamante

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012004

An approach for analysis of critical infrastructure vulnerability to climate hazards

P Zlateva and S Hadjitodorov

[+ Open abstract](#) [View article](#) [PDF](#)

Energy Chemistry and Chemical Engineering

OPEN ACCESS

012005

Ethanol to high-octane hydrocarbons using HZSM-5 as catalyst

Sebastian Taco-Vasquez, Miguel Salinas, Herman Murillo and William Oñate

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012006

Sustainable product development of biomass briquette from *Samanea saman* leaf waste with rejected papaya as the binding agent in Indonesia

Yusuf Hilario, Iwan Halim Sahputra, Yusak Tanoto, Gabriel Jeremy Gotama, Alexander Billy and Willyanto Anggono

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012007

Phytochemical screening and antioxidants *in vitro* bioaccessibility of *Coccinia grandis*: an underutilized wild edible plant in Sri Lanka

P S Peduruhewa, K G L R Jayathunage and R Liyanage

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012008

Heat transfer optimization in a horizontal helical-shaped ground heat exchanger through response surface methodology

J D Malacas, L V R Certeza, B A Alfonso, M H Clerigo, G A Tiangco and C P Valencia

[+ Open abstract](#) [View article](#) [PDF](#)

Renewable Energy Technology and Energy Consumption Analysis

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see

[Privacy and Cookies policy.](#)

012009



IOP Conference Series: Earth and Environmental Science

COUNTRY

United Kingdom

Universities and
research
institutions in
United Kingdom**SUBJECT AREA AND
CATEGORY**Earth and Planetary
SciencesEarth and
Planetary
Sciences
(miscellaneous)Environmental
ScienceEnvironmental
Science
(miscellaneous)Physics and
AstronomyPhysics and
Astronomy
(miscellaneous)**PUBLISHER**

IOP Publishing Ltd.

H-INDEX**34****PUBLICATION TYPE**Conferences and
Proceedings**ISSN**

17551307, 17551315

COVERAGE






2010-2021

INFORMATION[Homepage](#)[How to publish in
this journal](#)ees@ioppublishing.org**SCOPE**




The open access IOP Conference Series: Earth and Environmental Science (EES) provides a fast,


versatile and cost-effective proceedings publication service.

Join the conversation about this journal

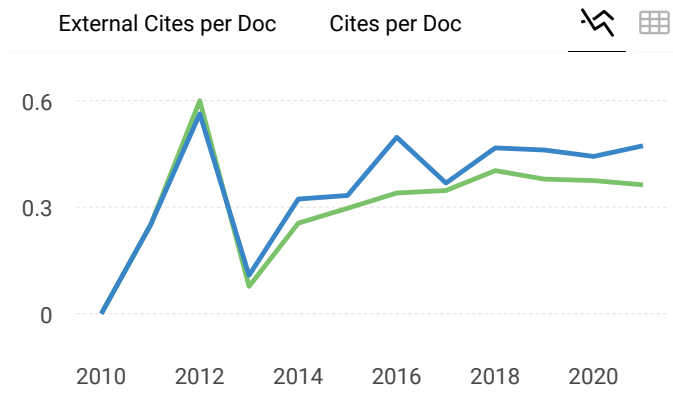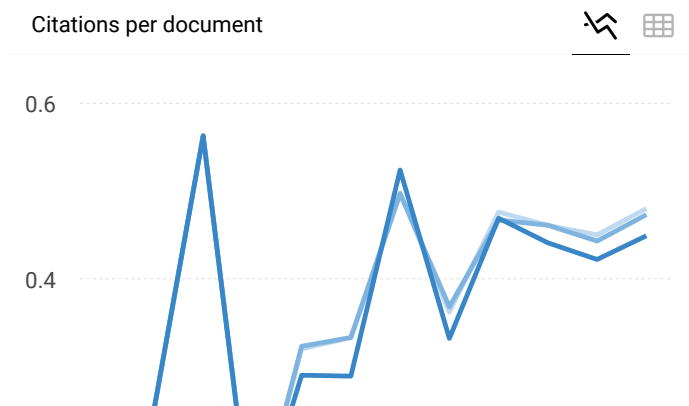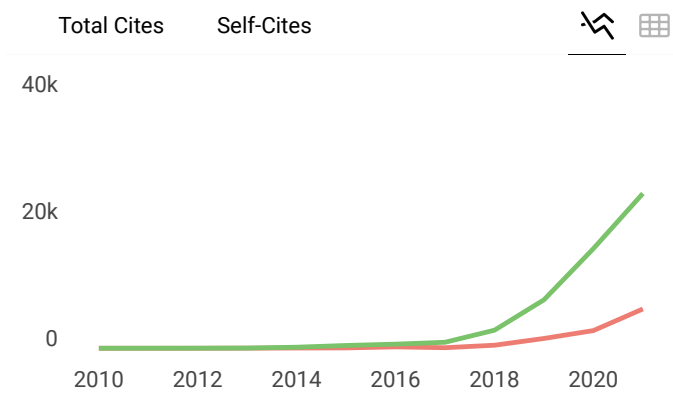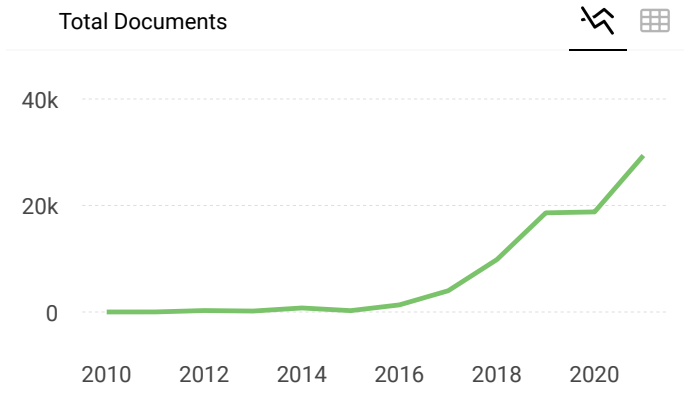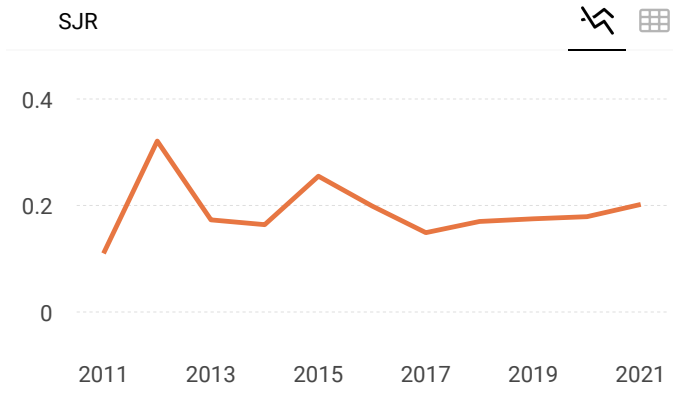


- Cites / Doc. (4 years)
- Cites / Doc. (3 years)
- Cites / Doc. (2 years)

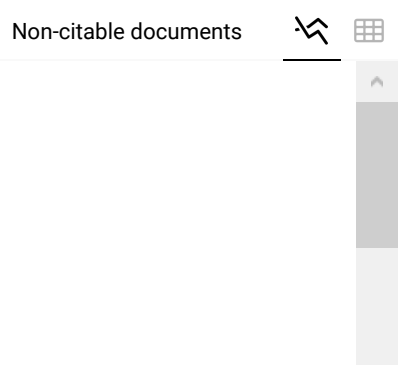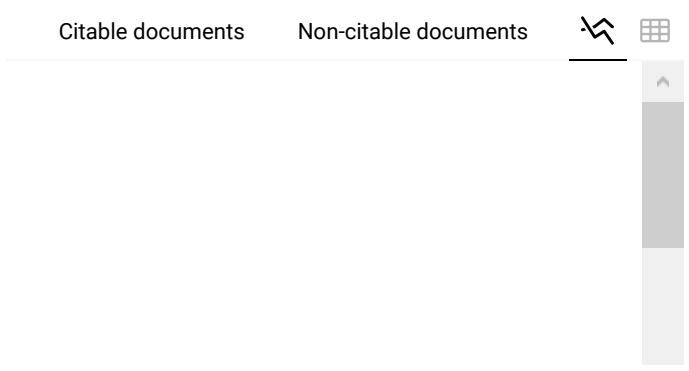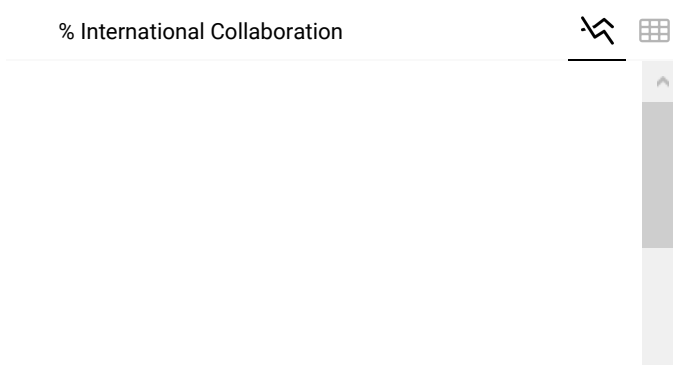

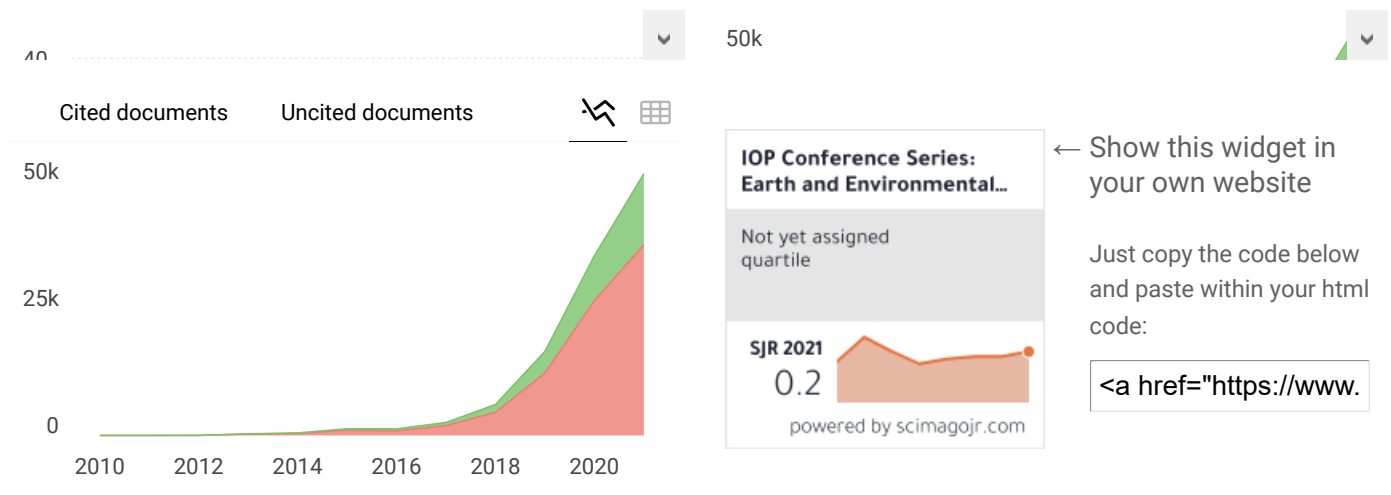

SCImago Graphica

Explore, visually communicate and make sense of data with our [new data visualization tool](#).

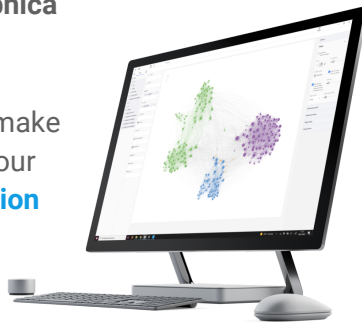

Metrics based on Scopus® data as of April 2022

N NAJI 6 months ago

Hello Dear

I participated as a corresponding author in IOP conf .series: Earth and Environment Science
877(2021)012046

I want do this IOP still in Scopus ???

kind regards

PAPER • OPEN ACCESS

Sustainable product development of biomass briquette from *Samanea saman* leaf waste with rejected papaya as the binding agent in Indonesia

To cite this article: Yusuf Hilario *et al* 2022 *IOP Conf. Ser.: Earth Environ. Sci.* **1094** 012006

View the [article online](#) for updates and enhancements.

You may also like

- [Physico-Mechanical Characterisation of Fuel Briquettes made from Blends of Corncob and Rice Husk](#)
H. A. Ajimotokan, S. E. Ibitoye, J. K. Odusote *et al.*
- [Pre-Design of Bio-Briquette Production Using Kenari Shell](#)
Sundari, Nurmaya Papuangan and A.W. Jabid
- [The utilization of biomass waste as charcoal briquette to reduce waste disposal](#)
Safri Gunawan, Banu Nursanni, Suprpto *et al.*



The Electrochemical Society
Advancing solid state & electrochemical science & technology

243rd ECS Meeting with SOFC-XVIII

More than 50 symposia are available!

Present your research and accelerate science

Boston, MA • May 28 – June 2, 2023

[Learn more and submit!](#)

Sustainable product development of biomass briquette from *Samanea saman* leaf waste with rejected papaya as the binding agent in Indonesia

Yusuf Hilario^{1,2}, Iwan Halim Sahputra^{1,2}, Yusak Tanoto^{1,3}, Gabriel Jeremy Gotama¹, Alexander Billy^{1,4}, and Willyanto Anggono^{1,4,*}

¹Centre for Sustainable Energy Studies, Petra Christian University, Surabaya, Indonesia

²Industrial Engineering Department, Petra Christian University, Surabaya, Indonesia

³Electrical Engineering Department, Petra Christian University, Surabaya, Indonesia

⁴Mechanical Engineering Department, Petra Christian University, Surabaya, Indonesia

*E-mail: willy@petra.ac.id

Abstract. The depletion of solid fuels in the world triggers the requirement for the existence of an alternative fuel product as a substitute. In several studies, briquettes have become one of the alternatives used to deal with this problem. However, the selection of briquette material that considers its impact on economic, social, and environmental aspects has not been widely carried out. To solve this problem, the selection of raw materials for briquettes must be determined using the concept of sustainable product development (SPD). SPD is a concept that can be used to determine a new product by considering various aspects, including economic, environmental, and social aspects. Briquette fuel that is derived from leaf waste and rejected fruit as a binding agent can be an alternative to renewable solid fuels since the raw materials come from wastes that have no selling value. The methodology used in this research is by conducting a survey at five markets in Surabaya and proceeding with interviews with the local government official. Pugh Matrix Concept Selection (PMCS) method is used to determine the suitable raw materials and to analyze the sustainability of the product development. Through PMCS, the results show that the best material for briquette production based on economic, social, and environmental aspects is a mixture of *Samanea saman* leaf waste with a 12.83 rating value and rejected papaya as the binding agent with a 10.44 rating value. Briquette with a mixture of 95% *Samanea saman* leaf waste and 5% rejected papaya is produced with a mesh size of 60 or 250 μm and a compression pressure of 2 MPa and is identified to have a heating value of 4025.87 Kcal/Kg.

1. Introduction

The increased human population leads to larger energy demand, including thermal energy. However, the availability of thermal energy in the form of fossil fuels is currently running low. According to the Ministry of Energy and Mineral Resources, the availability of natural gas is expected to run out within the next 22 years, while solid fuels are expected to be exhausted in the next 65 years [1]. Since fossil fuels are not environmentally friendly and non-renewable, the reliance on them as the primary sources of thermal energy is not sustainable [2, 3].

Briquette is one alternative for fossil fuel and it can be composed of various types of biomasses such as sawdust, agricultural waste, food waste, and paper waste. One of the most common materials found



in the manufacture of waste-based briquettes is plant waste and fruit waste [4]. Several studies on briquettes have been carried out by Anggono et al. [5,6] in making briquettes from leaf wastes and research by Nurhilal et al. [7] also studies the composition of briquettes from mahogany tree wastes with tapioca as the binding agent. From those past studies mentioned, it can be understood that the selection of briquette materials did not examine the product development sustainability.

To reduce human reliance on fossil fuels, alternative sources of thermal energy are necessary. For the past decades, various alternatives have been proposed. However, their application is hindered by their production sustainability. To consider the sustainability of the alternative, a sustainable product development concept can be implemented to further prevent damage to the environment [8]. One method that can be used to implement the sustainable product development concept is to utilize the PMCS. This method has been used by several researchers such as Thakker et al. [9] in selecting an impulse turbine product concept. Another work by Mustafa et al. [10] implements the Pugh Matrix Concept method to select and verify Kenaf plant fibers as an alternative to environmentally friendly friction materials in the automotive industries.

SPD has three crucial aspects, which are economic aspects, social aspects, and environmental aspects. A product can be regarded as sustainable if the product has a balance between the three SPD's crucial aspects [11, 12]. The three crucial aspects of the SPD concept were used as criteria and further subcategorized into design for social intervention, design for society, design for social innovation, design for cost, design for manufacturing, design for supply chain, and design for environment [13]. Briquettes made of the selected materials were then tested in the laboratory to obtain calorific values using proximate analysis to better understand the properties.

With regards to the need for sustainable fossil fuel alternatives, this study focuses on determining the best material for briquettes by applying the PMCS method based on the sustainable product development concept. The research aims to overcome the lack of previous studies where the selection process of briquette materials did not use any evaluation method and did not pay attention to the economic, social, and environmental aspects. The present study uses PMCS evaluation method with a sustainable product development concept as a criteria to get the suitable material for briquette from leaf waste and rejected fruit.

2. Experimental method

The first step of this research is conducting a survey at five markets in Surabaya, Indonesia (Citraland Market, PPI Market, Keputran Market, Darmo Market, and Keputih Market). The initial data taken are the types of fruit sold at each market and the average amount of rejected fruit each week. After obtaining data on various types of fruit sold and the average amount of rejected fruit, all data were collected and then used as a reference in making a questionnaire. The second step of this research is to obtain answers from fruit sellers at the market by interview. The questions include the kind of fruit they sell, the fruit that has the most waste, and the amount of the waste. The type of answer is in the form of multiple choices answers. After the answers were collected, the results were converted into numbers and averaged.

The results from the questionnaire show that *Raja* bananas, pineapples, papayas, and oranges have the most waste. Therefore, they were included as the four candidates in PMCS. Interviews were conducted at the local government official to obtain data on leaf waste in the city of Surabaya. The questions asked during the interview are regarding the most dominating tree species in the city of Surabaya. From the interview, the local government official informed that the most dominating trees in Surabaya are the *Pterocarpus indicus* tree, *Samanea saman* tree, palm tree, and *Cerbera manghas* tree.

The aspects used in determining the criteria in the Pugh Matrix Concept Selection were determined based on research conducted by He [13]. All aspects are then entered into the objective tree, as similarly conducted by Mustafa et al. [10] to determine the weight factor of each criterion. The calculation of weight factors value is determined using the WDM (Weight Decision Matrix) method where the value of all decision matrices sums to '1' [10,14]. The objective tree of leaf waste and fruit waste is illustrated in Figure 1(a) and 1(b) respectively. The level of each criterion was determined based on the level of importance in the manufacture of waste briquettes.

Consideration was given to the economic, environmental, and social aspects. In the economic aspect, the calorific value is the most important criterion since a high calorific value will produce a better yield which is closer to the standard provisions for wood charcoal briquettes. In addition, the high calorific value will also affect the selling value of the briquettes where it meets the requirements of a sustainable product, namely cost design. In the environmental aspect, the criteria are its role in reducing the volume of waste and the impact that will occur when the waste is not cleaned immediately. These criteria were chosen due to their inseparable relations as part of the design for environmentally sustainable products. In the social aspect, the most important criterion in making a sustainable product is the design for society. It includes the job openings as a consequence of the briquette manufacturing plant, which translates to an additional income and a health impact on the community.

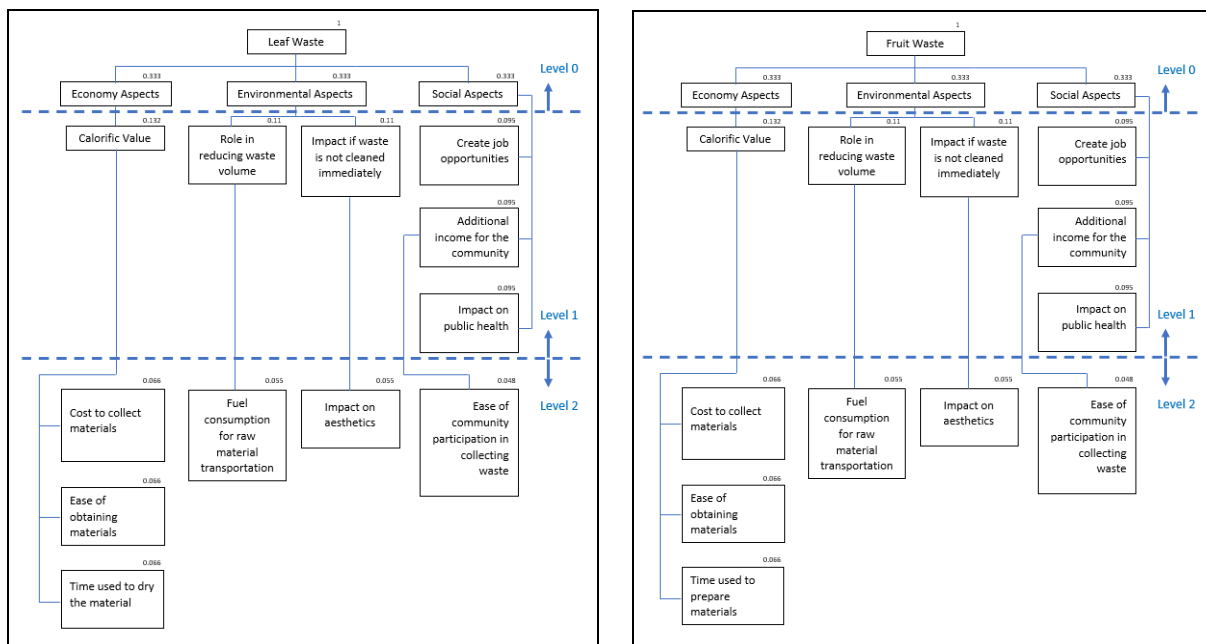


Figure 1. Objective tree of Pugh Matrix Concept implementation on the (a) leaf waste and (b) fruit waste

After obtaining all the criteria, Pugh Matrix Concept Selection was applied to determine the best materials for briquette production. The scoring on the Pugh Matrix uses a scale of 1-10, where 1 is the worst value and 10 is the best value. After assigning the score, the rating was calculated by multiplying the score by the weight factor. In the value column, the data filled were obtained from the interview results and analysis of the data. The raw material chosen for making briquettes was prepared to be processed into briquettes, following similar methods as described [5, 6]. In this study, leaf waste needs to be dried by directly exposing them under the sun for approximately 1-2 days. The dried leaf waste was then crushed into small particles. The size of the dried leaf waste particle is a mesh size of 60 or 250 μm . After the leaf waste was shifted, it was combined with the squashed fruit waste in a briquette mold (25 mm in diameter, 26 mm in height) with a ratio of 95% : 5%. The mold was pressed with a hydraulic press machine with 2 MPa pressure as shown in Figure 2. The briquettes that have been molded as shown in Figure 3 were then tested for their calorific values at the Sucofindo Laboratory using proximate analysis under SNI standards.



Figure 2. Hydraulic press machine



Figure 3. Briquette final product

3. Results and discussion

Based on the results of the survey conducted at the five markets in Surabaya, *Raja* bananas, pineapples, papayas, and oranges are the fruits suitable as candidates for the selection process in the Pugh Matrix Concept Selection due to their sufficient amount of waste and availability at the markets. These fruits were then assessed and calculated using the Pugh Matrix as demonstrated in Figure 4. From the evaluation, it can be determined that the fruit with the highest rating is papaya (10.44). Therefore, it is used in this study for the briquette production and further analysis. As for the leaf waste, based on the interviews with the government official of Surabaya City, the most dominating trees are the *Pterocarpus indicus* tree, *Samanea saman* tree, palm tree, and *Cerbera manghas* tree. Thus, the four trees are the candidates for the selection process in the Pugh Matrix. The assessment and calculation of leaf waste in the Pugh Matrix are illustrated in Figure 5. After evaluating the leaf waste potential using the Pugh Matrix Concept, *Samanea saman* leaf waste was found to have the highest rating with a value of 12.83, and therefore it was chosen as the main raw material for making briquettes in this study.

Briquettes were tested for their calorific value at the Sucofindo Laboratory, Surabaya, Indonesia using proximate analysis under SNI 01-2891-1992 standards, and the results are shown in Figure 6. Comparison of the current briquette's calorific value with those from the previous studies are shown in Figure 7. With composition of 95% *Pterocarpus indicus* leaf waste and 5% rejected papaya, the calorific value is 4338.79 KCal/Kg [6], while at 95% *Samanea saman* leaf waste and 5% rejected papaya, the calorific value is 4025.87 KCal/Kg. With composition of 95% *Pterocarpus indicus* leaf waste and 5% rejected pineapple, the calorific value is 4169.76 Kcal/Kg [15].

4. Summary

Pugh Matrix Concept Selection method was implemented to determine the best raw materials for briquette production in Surabaya, Indonesia. Through analysis and calculations carried out using PMCS concerning the environmental, economic, and social aspects, rejected papaya and *Samanea saman* leaf waste were found to be the most ideal raw materials. Therefore, these wastes were used as the material for making briquette and the composition ratio of 95% leaf waste and 5% fruit waste were found to have a calorific value of 4025.87 KCal/Kg. This promising result using PMCS method that pay attention to the SPD concept for material selection process of making briquette can also be applied in other region or countries according to various availability of leaf and fruit waste resources.

	No	Criteria	Weight Factor	Raja Banana Fruit Waste			Pineapple Fruit Waste			Papaya Fruit Waste			Orange Fruit Waste		
				Value	Score	Rating	Value	Score	Rating	Value	Score	Rating	Value	Score	Rating
Economy Aspect	1	Calorific value (Kcal/Kg)	0.135	96.51	2.2	0.30	233.32	5.4	0.72	435.02	10	1.35	36.2	0.8	0.11
	2	Cost to collect materials (Rupiah/Ton)	0.066	Rp3,316,089	6.4	0.87	Rp3,635,277	5.9	0.79	Rp2,673,211	8	1.08	Rp2,979,712	7.2	0.97
	3	Ease of obtaining materials (Kg/Arm Roll truck 14m ³)	0.066	4386	5.8	0.78	3931	5.2	0.70	5283	7	0.95	4822	6.4	0.86
	4	Time used to dry materials (day)	0.066	1.7	6.5	0.87	1.34	5.1	0.69	2.1	8	1.08	1.89	7.2	0.97
Environmental Aspect	5	Role in reducing waste volume (Kg/m ³)	0.11	301.1	7.2	0.97	280.8	6.7	0.90	377.4	9	1.22	344.5	8.2	1.11
	6	Impact if waste is not cleaned immediately	0.11	Non Acceptable	7	0.95	Non Acceptable	3	0.41	Non Acceptable	3	0.41	Non Acceptable	3	0.41
	7	Impact on aesthetics	0.055	Acceptable	7	0.95	Non Acceptable	3	0.41	Non Acceptable	3	0.41	Acceptable	7	0.95
	8	Fuel consumption for raw material transportation (Liters/Ton)	0.055	100	5.6	0.75	107	5.2	0.70	79	7	0.95	87	6.4	0.86
Social Aspect	9	Create job opportunities	0.095	1	5	0.68	1	5	0.68	1	5	0.68	1	5	0.68
	10	Additional income for the community (Rupiah/Kg)	0.095	Rp649	9.1	1.23	Rp711	10	1.35	Rp523	7.4	0.99	Rp583	8.2	1.11
	11	Impact on public health	0.095	Dangerous	6	0.81	Very dangerous	1	0.14	Very dangerous	1	0.14	Dangerous	6	0.81
	12	Ease of community participation in collecting waste	0.048	Very easy	9	1.22	Easy	7	0.95	Very easy	9	1.22	Very easy	9	1.22
TOTAL RATING						10.37				8.43				10.44	10.04

Indicator: ideal solution 10, excellent 9, very good solution 8, good solution 7, good solution with a few drawbacks 6, satisfactory solution 5, tolerable solution 4, poor solution 3, weak solution 2, very inadequate solution 1, totally useless solution 0

Figure 4. Pugh Matrix Concept Selection on fruit waste

	No	Criteria	Weight Factor	Cerbera manghas Leaf Waste			Samanea saman Leaf Waste			Pterocarpus indicus Leaf Waste			Palm Leaf Waste		
				Value	Score	Rating	Value	Score	Rating	Value	Score	Rating	Value	Score	Rating
Economy Aspect	1	Calorific value (Kcal/Kg)	0.135	4287.5	8.8	1.18	4897	10	1.35	4427.6	9.0	1.22	4242	8.7	1.17
	2	Cost to collect materials (Rupiah/Ton)	0.066	Rp8,873,611	6.8	0.92	Rp7,583,382	8	1.08	Rp9,717,110	6.2	0.84	Rp23,445,871	2.6	0.35
	3	Ease of obtaining materials (Kg/Arm Roll truck 14m ³)	0.066	1668.1	5.8	0.79	2001.7	7	0.95	1455.8	5.1	0.69	788.6	2.8	0.37
	4	Time used to dry materials (day)	0.066	2	4	0.54	1	8	1.08	1	8	1.08	0	10	1.35
Environmental Aspect	5	Role in reducing waste volume	0.11	119.2	7.5	1.01	143	9	1.22	104	6.5	0.88	56.3	3.5	0.48
	6	Impact if waste is not cleaned immediately	0.11	Very dangerous	2	0.27	Not dangerous	8	1.08	Not dangerous	8	1.08	Dangerous	5	0.68
	7	Impact on aesthetics	0.055	Medium	5	0.68	Small	8	1.08	Small	8	1.08	Big	2	0.27
	8	Fuel consumption for raw material transportation (Liters/Ton)	0.055	18	7	0.95	15	9	1.22	28.5	5	0.68	38	3	0.41
Social Aspect	9	Create job opportunities	0.095	1	5	0.68	1	5	0.68	1	5	0.68	2	7	0.95
	10	Additional income for the community (Rupiah/Kg)	0.095	Rp1,736	8.5	1.15	Rp1,483	10	1.35	Rp1,901	7.8	1.05	Rp4,587	3.2	0.44
	11	Impact on public health	0.095	Very dangerous	2	0.27	Dangerous	5	0.68	Dangerous	5	0.68	Dangerous	5	0.68
	12	Ease of community participation in collecting waste	0.048	Very easy	8	1.08	Very easy	8	1.08	Easy	5	0.68	Not Easy	2	0.27
TOTAL RATING						9.51				12.83				10.63	7.40

Indicator: ideal solution 10, excellent 9, very good solution 8, good solution 7, good solution with a few drawbacks 6, satisfactory solution 5, tolerable solution 4, poor solution 3, weak solution 2, very inadequate solution 1, totally useless solution 0

Figure 5. Pugh Matrix Concept Selection on leaf waste

Parameter	Unit	Result	Method
Moisture	% mass	10.40	SNI 01-2891-1992, point 5.1
Ash	% mass	1.51	SNI 01-2891-1992, point 6.1
Crude Protein (N x 6.25)	% mass	3.48	SNI 01-2891-1992, point 7.1
Fat	% mass	6.55	SNI 01-2891-1992, point 8.1
Raw Fiber	% mass	12.31	SNI 01-2891-1992, point 11
Carbohydrate	% mass	1.75	By differences from the other compositions
Calorific Value	cal/100 gr	4025.87	By Calculation

Figure 6. Proximate analysis results of 95% *Samanea saman* leaf waste with 5% rejected papaya briquette

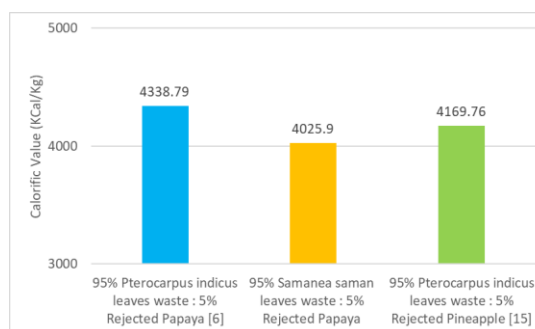


Figure 7. Calorific value of various briquettes

5. References

- [1] Katadata.co.id 2020 Bahan bakar fosil menipis, ESDM dorong transisi energi. Accessed on 15 November 2020 <https://katadata.co.id/sortatobing/ekonomi-hijau/5f90073b81977/bahan-bakar-fosil-menipis-esdm-dorong-transisi-energi>
- [2] Kotcher J, Maibach E and Choi W T 2019 Fossil fuels are harming our brains: identifying key messages about the health effect of air pollution from fossil fuels *BMC Public Health* **19** 1079.
- [3] Handayani K, Krozer Y and Filatova T. 2019 From fossil fuels to renewables: An analysis of long-term scenarios considering technological learning *Energy Policy* **127**
- [4] Brunerova A, Roubik H, Brozek M, Herak D, Sleger V, and Mazancova J 2017 Potential of tropical fruit waste biomass for production of bio-briquette fuel: using Indonesia as an example. *Energies*
- [5] Anggono W, Suprianto F D, Sutrisno and Kasrun A W 2016 Investigation on biomass briquette as energy source from waste leaf *Cerbera manghas* *JIRAE* **1** 1
- [6] Anggono W, Sutrisno, Suprianto F D, Arifin F X Y and Gotama G J 2020 Combustion Performance of *Pterocarpus indicus* Leaves Wastes Briquette with Rejected Papaya as Binding Agent. 10th *International Conference on Future Environment and Energy* **581**
- [7] Nurhilal O, Suryaningsih S, Nusi S 2018 Preparation and characterization of leaf-based bio briquette with tapioca as adhesives *Journal of Powder Technology and Advanced Functional Materials* **1** 1
- [8] Ahmadi Z, Pintado A B 2021 The effect of sustainability on new product development in manufacturing-internal and external practices *Adm. Science* **11** 115
- [9] Thakker A 2009 3DCAD conceptual design of the next-generation impulse turbine using the Pugh decision-matrix *Materials and Design* **30** 2676-2684
- [10] Mustafa A 2015 Selection and verification of kenaf fibres as an alternative friction material using Weighted Decision Matrix Method *Materials and Design* **67** 577-582
- [11] Klopffer W 2003 Life-cycle based methods for sustainable product development *The International Journal of Life Cycle Assessment* **8** 157 doi:10.1007/BF02978462
- [12] Su D 2020 Sustainable product development (tools, methods, and examples) Switzerland: Springer
- [13] He B 2020 Product sustainable design: a review from the environmental, economic, and social aspects *Journal of Computing and Information Science in Engineering* **20**
- [14] George E D, Schmit L G 2009 Engineering design. 4th ed.
- [15] Gotama J G, Angono W, Sutrisno T, Suprianto F D, Jonoadji N, Arifin F X Y 2017 Investigation of briquette derived from *Pterocarpus indicus* leaves and rejected pineapples as inedible sources of renewable energy. *IOP Conference Series Materials Science and Engineering* **1034**