

nanopowder

by Ekadewi Handoyo

Submission date: 20-Sep-2022 01:53PM (UTC+0700)

Submission ID: 1904353547

File name: camera_ready_ekadewi_paper.pdf (395.03K)

Word count: 3871

Character count: 19563

Experimental Study on the Motorcycle Radiator Cooling Performance with the Effect of Nano ZnO

Ekadewi A. Handoyo^a, Christian I. Soevanto^b, Sutrisno^c

Mechanical Engineering Dept, Faculty of Industrial Technology, Petra Christian University – Indonesia
^aekadewi@petra.ac.id, ^bm24414080@alumni.petra.ac.id, ^csutrisno@petra.ac.id.

Abstract. An internal combustion engine requires a proper cooling system to release heat from the engine. The working fluid or coolant in a water-cooled engine impacts the overall radiator cooling performance. Several studies show that nanopowder can increase the thermal performance of the base fluids, although the pressure drops increase significantly. This paper describes the experimental research of motorcycle radiator cooling performance using nanopowder ZnO with distilled water and commercial coolant as the base fluids. The results show that the boiling point of all nanofluids increases with the highest boiling point achieved by 0.5% ZnO – coolant, i.e., 110.06°C. Thus, the nanopowder will keep the cooling fluid in the liquid phase and lower the fluid's specific heat. Nanofluid 0.5% ZnO – coolant gives the highest temperature drops and overall heat transfer coefficient among other nanofluids or the base fluids. Unfortunately, nanopowder also increases pressure drop by approximately twice the base liquid. The next research should analyze the effect of Nanopowder ZnO on the surface of the radiator pipe with which the ZnO is in contact. Before implementing ZnO in an actual motorcycle radiator, it is necessary to study the effect of the nanopowder on the surface of the cooling passage of the motorcycle.

Keywords: Nanopowder ZnO, Radiator, ethylene glycol, overall heat transfer coefficient, pressure drop

INTRODUCTION

An internal combustion engine converts thermal energy from the fuel to mechanical energy. Then, it will drive some equipment, such as electrical generators, automobiles, lawnmowers, military, and emergency vehicles, railroad locomotives, construction equipment, boats, etcetera (1). In the combustion process, there is an increase in the temperature of the combustion chamber, the walls, and its surroundings. Since the strength of the engine's material is limited, cooling is an essential process in equipment that uses an internal combustion engine as its driving force.

Generally, the cooling media used is either water or air. Air is easier to handle and less expensive than water for cooling an internal combustion engine. However, the heat transfer rate of water is much higher than that of air. That is why much working fluid is water for the cooling process in gasoline or diesel cars and some motorcycles—the heat produced during the combustion process is released from the outer surface of the cylinder to the air. Some fins are inserted since the convection heat transfer in the air is lower than in water. Fins are generally cast integrally with the cylinder. The fins extend the area of heat transfer and thus improve the cooling process.

Engine coolant is preferred over water, considering it has some disadvantages compared to engine coolant. Water has a higher freezing point and lower boiling point and is more corrosive than the coolant. Thus, coolant is mainly used in the cooling system of an internal combustion engine.

Water or coolant will flow through the cylinder block and absorb some heat from the cylinder. Then, water or coolant will release the heat while it flows in a radiator. A fan installed in front of the radiator to draw ambient air to cool off the liquids. A thermostat primarily controls the flow rate of the cooling fluid entering the engine. The thermostat controls the flow so that the engine operates at an optimum temperature (2).

Suppose the operating temperature of the cylinder is too high. It could be harmful to the cylinder, especially if it is made of aluminum, a head-cylinder gasket, and other equipment such as a pump. But if it's too low, more thermal energy will be transferred to the cooling media. Then it will lead to improper vaporization of the fuel and decrease the

performance of the Internal Combustion Engine. So, the cooling liquid needs to be controlled to maintain the temperature of the engine within the optimum range (1), (2), and (3).

For an old car, the radiator might have some deposit inside or outside the pipes, and the fan's performance might decrease. These conditions reduce heat transfer from the cooling liquid to the ambient air, especially when traffic jams are on a hot summer day. An indicator shows that the water temperature is higher than the recommended value.

Thanks to God for the nanotechnology. It can be applied in any area of our lives, including solar collectors and coolants in automotive heat exchangers (4). Nanopowder CuO in water or nanofluid has improved fluids' thermal properties and increased the Nusselt number by increasing the Reynolds number, thus improving the convective heat transfer coefficient (5). Nanofluid CuO could increase overall heat transfer compared to distilled water (6). Titanium oxide was used as the nanoparticles in cooking oil as the fluid base. The heat transfer rate increased 36.25% for 0.09% of nanofluid volume concentration (7). An experiment used Alumina nanoparticles whose size was 22 nm in diameter. Alumina-water based nanofluid was produced with different concentrations of Alumina particles using an ultrasonicator. The heat transfer rate increases as the particle size decreases (8). The heat transfer improved by using nano aluminum oxide with 20 nm particle size and some volume fraction from 0.001 to 0.002. The overall heat transfer coefficient increases by 8%–10% (9). The Al₂O₃ nanoparticles of about 30 nm diameter are used in water. The convective heat transfer coefficient of nanofluid is higher than that of the base liquid at the same mass flow rate and inlet temperature (10). Nanofluid flows inside the inner tube, and pure hot water flows in the outer tube. Results show that the overall heat transfer coefficient increases with nanoparticle volume concentrations in the heat exchangers (11). Various nanofluids such as Al₂O₃, TiO₂, and SiO₂ on automotive engine (Aprilia SXV 450 engine) cooling were experimentally studied. For the 1% volume concentration of nanoparticles, they found that TiO₂, SiO₂, and Al₂O₃ nanofluids could give higher heat transfer than the base fluid, i.e., 31.9%, 27.7%, and 12.5%, respectively, at flow rate = 3.5 GPM (12). Another researcher investigated numerically the effect of three types of nanoparticles: copper oxide (CuO), aluminum oxide (Al₂O₃), and titanium dioxide (TiO₂) on the cooling capabilities of ethylene glycol (EG)-based fluid in a radiator (13).

The effect of Zinc oxide (ZnO) water-based nanofluids was also studied on Suzuki Mehran (VXR) 2016 radiator. They learned the heat transfer, pressure drop, and friction factor. Three kinds of volumetric concentrations of ZnO nanoparticles were employed, i.e., 0 – 0.3% (14). Another study on automotive car radiators applied to copper to the ethylene glycol or coolant. Thus, it turned out to be ethylene glycol copper nanofluids. The heat transfer enhancement of the radiator with this nanofluid increased by 3.8% when the copper was added as much as 2% at Reynolds numbers of 6000 and 5000 for the air and coolant (15). Zinc Oxide (ZnO) in aqueous-based nanofluid effectively increases the heat absorption capacity. The ZnO nanoparticles used were 19 to 30 nm (16). The ZnO-water nanofluid is used in a concentric tube heat exchanger. ZnO-water nanofluid's overall heat transfer coefficient increases by 11% with a volume fraction of 0.5% compared with water (17). ZnO nanoparticle ethylene glycol (EG) improve the transport properties of ZnO-EG nanofluids. ZnO-EG-water nanofluid has a thermal conductivity enhancement of 17.26% viscosity reduction of 17.34% at 27°C (18).

In recent years, nanoparticles have been extensively applied in many heat exchangers, including radiators. Many researchers used ZnO nanoparticles, but the base fluid used in nanoparticles was water. Some research used ethylene glycol as base fluid but did not use ZnO. Suganthi et al. investigated ZnO-ethylene glycol nanofluid, but they discussed the transport properties and not the heat transfer or the pressure drop (18). This paper will discuss the result of an experiment conducted to find the effect of nanopowder Zinc Oxide (ZnO) added to the cooling liquid of the radiator of a motorcycle Vixion 2012. The ZnO and 2012 Vixion motorcycle specification sheets are attached in Appendix 1 and 2. Some parameters to be measured were the boiling point, specific heat, the temperature of the cooling liquid at the inlet and outlet of a radiator, and pressure drop of liquid.

RESEARCH METHODS

There were six fluids observed in this experiment, i.e., (1) distilled water, (2) distilled water + nanopowder ZnO 0.3%, (3) distilled water + nanopowder ZnO 0.4%, (4) distilled water + nanopowder ZnO 0.5%, (5) commercial coolant (ethylene glycol), (6) coolant (ethylene glycol) + nanopowder ZnO 0.5%. The first thing conducted was doing the preliminary experiment to find the boiling point and specific heat of the six fluids, as shown in Fig. 1 and Fig. 2, respectively. The boiling point of nanofluid is higher than the base fluid. It is true for distilled water and coolant. More concentration of the nanopowder ZnO makes the boiling point increase. The highest boiling point is given by 0.5% ZnO – coolant, i.e., 110.06°C. The boiling point increases 1.81% for 0.5% ZnO – distilled water and 9.13% for 0.5%

ZnO – coolant. Thus, the nanofluid will keep the cooling fluid stay in a liquid phase. The measured temperature has an uncertainty of $\pm 0.1^\circ\text{C}$ or around 0.1%. Then, the boiling point of the six fluids is very accurate.

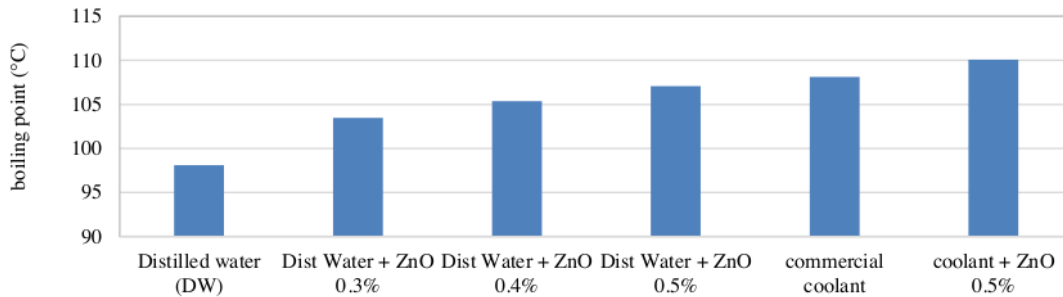


FIGURE 1. The boiling point of the six fluids studied

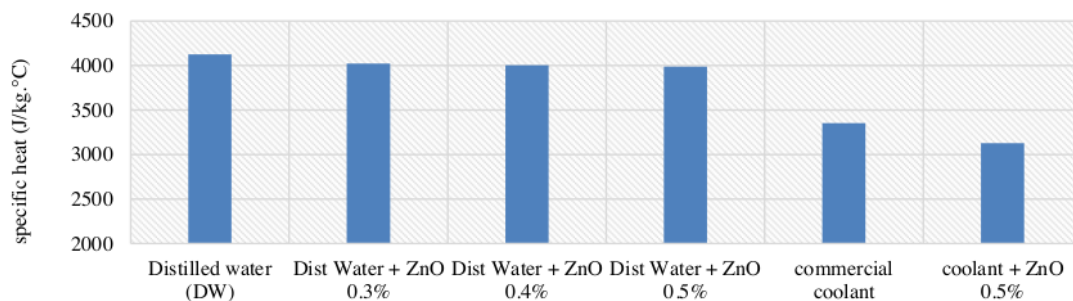


FIGURE 2. The specific heat of six fluids in this study

Fig. 2 shows that the higher concentration of ZnO, the lower the specific heat of the nanofluid. The result of the experiment with distilled water determined the concentration of ZnO used with coolant. Since the specific heat of distilled water with ZnO 0.5% is the least, the experiment will use coolant with ZnO 0.5% as the nanofluid. The nanofluid will absorb and release heat easier. The specific heat was measured using a calorimeter. The quantities to be measured were the weight and the temperature. The smallest weight measured was 31.9 grams. At the same time, the scale has an uncertainty of ± 0.1 gram or around 0.3%. The uncertainty of the specific heat depends on the uncertainty of the scale, i.e., 0.3%, and the thermometer used, i.e., 0.1%. The uncertainty of the specific heat was 0.4% or around $\pm 12 - 17$ J/kg.C. The uncertainty was minimal, and the measurement was adequate.

The fluid velocity flowing inside the radiator pipe is needed to obtain the convection heat transfer coefficient. The flow rate of the cooling fluids in radiator Vixion 2012 was measured at different engine rotation speeds, as seen in Fig. 3. The flow rate of the cooling fluid increases when the engine speed increases. The engine needs much cooling when speeding up because more combustion energy is released.

The experiment cannot be conducted on the motorcycle because some instruments, such as thermocouples, airflow meter, and U-tube, need to be installed to measure pressure drop. Then, a set of equipment was prepared, as seen in Fig. 4. The water flowing into the radiator was heated in a hot water tank until it reached the optimum operating temperature of the radiator in a real motorcycle. A ball valve was installed to control the flow rate of the cooling fluid entering the radiator to have the same flow rate measured during the preliminary experiment. Cooling fluid released the heat to the air drawn by a fan in front of the radiator. Then, fluid flowed down to the reservoir tank and circulated back to the hot water tank by a pump.

The K-type thermocouple was installed at the inlet and outlet of the cooling fluid, at the inlet and outlet of the air crossing radiator, and at the hot water tank to ensure that the temperature of the cooling fluid entering the radiator was at the optimum temperature. U-tube was installed to measure the pressure drop of cooling fluid passing through the radiator. Fig. 5 (a) and (b) show the location of the instruments installed.


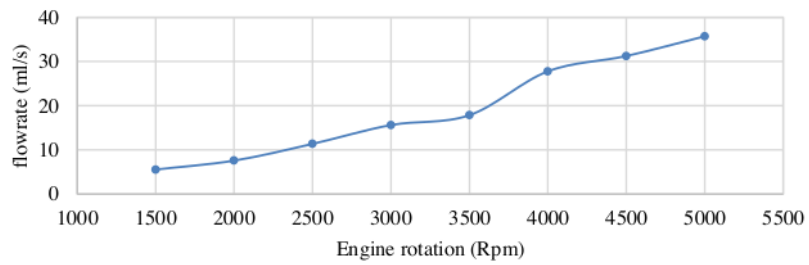


FIGURE 3. The cooling fluid flow rate at a different engine rotation speed




(a) Schematic diagram

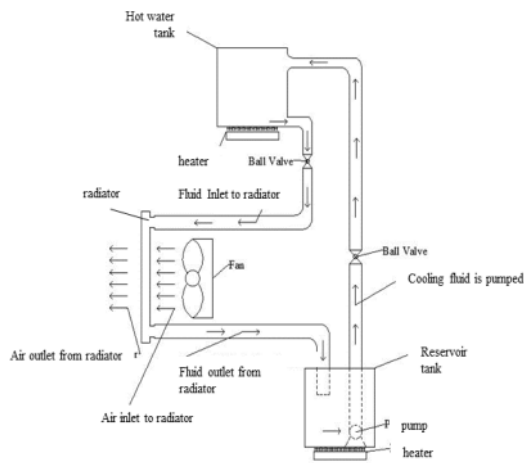


(b) experimental equipments

FIGURE 4. The equipment used during experiments

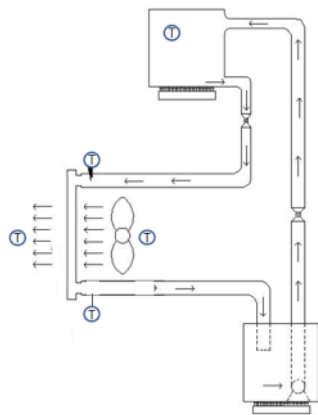

(a) Location of K-type thermocouple

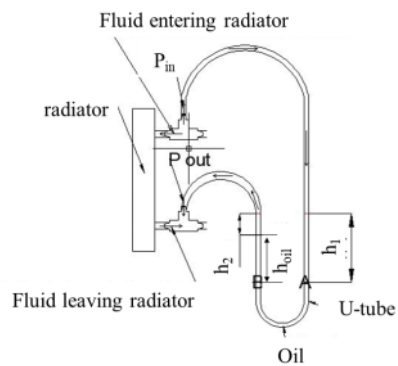

(b) Location of U-tube

FIGURE 5. The location of the instruments installed

RESULT AND DISCUSSION

The effect of nanofluid using ZnO as the cooling fluid in the radiator of motorcycle Vixion 2012 is discussed in this section. The ambient air temperature during the experiment was between 29.2 – 32.1°C. Nanofluid with more concentration of ZnO gives a higher temperature drop for the cooling fluid passing through the radiator. It is valid for both base fluids, distilled water, and coolant. Figure 6 shows that the highest temperature drop occurs for nanofluid 0.5% ZnO coolant. A higher temperature drop means higher heat transfered from the cooling fluid to the air. The slightest temperature difference between both cooling fluid and air is when distilled water is used as the cooling fluid.

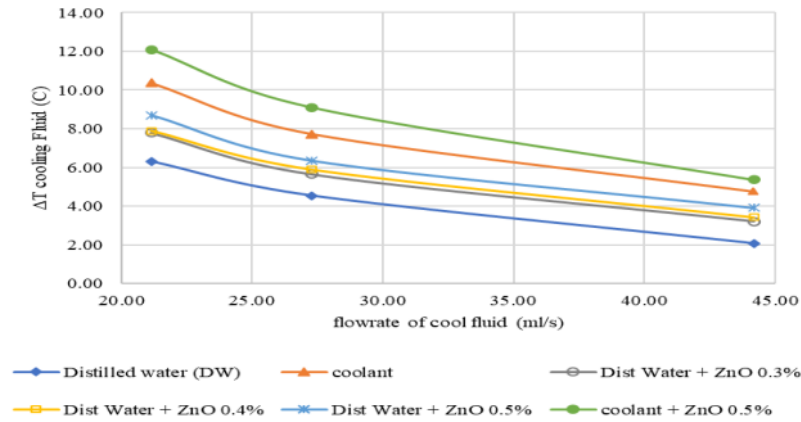


FIGURE 6. Temperature drops of cooling fluid passing through the radiator

The most significant temperature drop among the cooling fluids is nanofluid 0.5% ZnO – coolant. The specific heat of this nanofluid is the smallest in Fig. 2. For the same flow rate and heat transfer, the smaller the specific heat, the higher the temperature difference.

1. Overall heat transfer coefficient

Heat transfer in the radiator involves convection in each fluid, conduction through the wall separating the air and cooling fluid. An overall heat transfer coefficient U is used to account for the contribution of all these effects on heat transfer. The rate of heat transfer from the cooling fluid is equal to the rate of heat transfer to the air, as shown in Eq (1):

$$\dot{Q} = m_{cooling\ fluid} c_p \Delta T_{cooling\ fluid} = UA \Delta T_{LM} \quad (1)$$

Where log-mean temperature difference, ΔT_{LM} , is defined as in Eq (2):


$$\Delta T_{LM} = \frac{\Delta T_2 - \Delta T_1}{\ln\left(\frac{\Delta T_2}{\Delta T_1}\right)} \quad (2)$$

$$\Delta T_2 = T_{cooling\ fluid,in} - T_{air,out}, \quad \Delta T_1 = T_{cooling\ fluid,out} - T_{air,in}$$

The overall heat transfer coefficient, U , in the radiator is shown in Fig. 7. Nanofluid 0.5% ZnO – coolant gives the highest value compared to other nanofluids or the base fluid, i.e., 42.7 W/m².°C when the flow rate is 44.2 ml/s. The lowest value is 14.7 W/m².°C when the fluid is distilled water flowing at 21.1 ml/s.

When coolant is the base fluid, the 0.5% nanopowder ZnO increases the overall heat transfer coefficient by 10.8%, 8.7%, and 12.4% for a flowrate of 21.1 ml/s, 27.3 ml/s, and 44.2 ml/s, respectively. The finding with

distilled water as the working fluid is that 0.3% nanopowder ZnO increases the overall heat transfer coefficient by 19.4%, 30.6%, and 60.8% for a flowrate of 21.1 ml/s, 27.3 ml/s, and 44.2 ml/s, respectively.

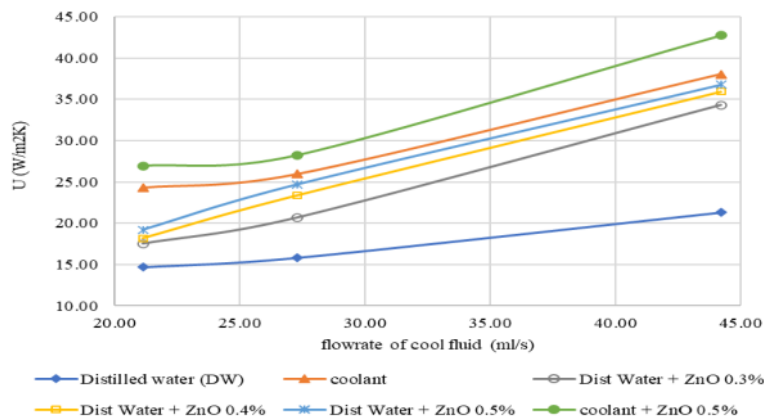

16
FIGURE 7. The overall heat transfer coefficient in the radiator.

The nanopowder ZnO can increase the overall heat transfer coefficient, U , for any base fluid. More concentration will produce a higher overall heat transfer coefficient, U , of the radiator. The overall heat transfer coefficient improvement occurs, mainly when the engine rotates at high speed. This finding can help overcome the degradation of the old radiator.

The overall heat transfer coefficient increases as more ZnO is used in the coolant-based or water-based nanofluid. This trend is the same as Suganthi et al. found (18). They reported that the thermal conductivity increased 33.4% when ZnO-EG (Ethylene Glycol) nanofluids contained 4% and only 17.26% for 2%. The thermal conductivity of both nanofluids increased linearly with nanoparticle concentration (18).

2. Pressure drop

Any viscous fluid will experience a pressure drop when it flows inside a pipe or enclosure. The pressure drop is caused by (1) friction between the fluid and the surface of the straight pipe or enclosure and (2) various fittings such as valve, elbow, tee, inlet, exit, expansion, and contractions in addition to the straight pipe. Figure 8 shows the pressure drop of the six-cooling fluid studied. Since coolant is more viscous than distilled water, its pressure drop is higher than water. It is valid for both the base fluid and nanofluid. More concentration of nanopowder ZnO in the fluid increases its pressure drop. So, the increasing overall heat transfer coefficient also produces a higher pressure drop.

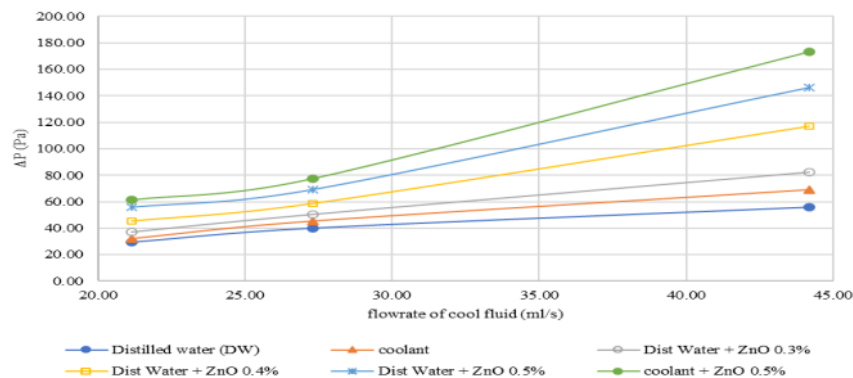


FIGURE 8. Pressure drops of cooling fluid passing through the radiator

The highest-pressure drop was given by nanofluid 0.5% ZnO – coolant, i.e., 61.24 Pa, 77.22 Pa, and 173.07 Pa for the flow rate of 21.1 ml/s, 27.3 ml/s, and 44.2 ml/s, respectively. While pressure drop given by base fluid coolant was only 31.95 Pa, 45.27 Pa, and 69.23 Pa for a flow rate of 21.1 ml/s, 27.3 ml/s, and 44.2 ml/s. Nanopowder ZnO with a concentration of 0.5% approximately doubled the pressure drop. Increasing pressure drop is undesirable since it means more pumping power circulates the cooling fluid to the radiator.

The higher the nanopowder's concentration, the higher the pressure drop. The trend corresponds to the other researchers' findings, such as Muh. Qasim et al. (14) and Suganthi et al. (18).

3. The Uncertainties of measurement apparatus

The measurement apparatus used in the experiment are shown in Table 1.

Table 1. The uncertainties of the measurement apparatus used

Instruments used	Accuracy	Smallest data measured	Biggest uncertainties
k-type thermocouple	0.1°C	$T_{\text{ambient-air}} = 29.2^{\circ}\text{C}$	0.34%
Scale	0.1 gr	$m_{\text{copper}} = 31.9 \text{ gram}$	0.31%
Measuring cup	10 ml	$V_{\text{water}} = 200 \text{ ml}$	5%
Stopwatch	0.1 s	$T_{\text{water-flow}} = 6.0 \text{ s}$	1.67%
mm block in u-pipe	1 mm	$H = 48 \text{ mm}$	2.08%
Meter	1 mm	$H = 70 \text{ mm}$	1.43%
Anemometer	0.1 m/s	5.8	1.72%

The most significant uncertainty of some variables calculated is 5.31% for the density, 6.67% for the flow rate, 1.3% for the specific heat, 5.49% for the overall heat transfer coefficient, and 8.75% for the pressure drop.

CONCLUSION

From the experiment conducted in a radiator Vixion 2012, nanopowder ZnO can increase boiling point, reduce the specific heat of the cooling fluid, increase temperature drop when it passes through the radiator, and increase overall heat transfer coefficient, but also increase pressure drop.

The highest boiling point given by 0.5% ZnO – coolant is 110.06°C. The boiling point increases 1.81% for 0.5% ZnO – distilled water and 9.13% for 0.5% ZnO – coolant. Thus, the nanopowder will keep the cooling fluid in a liquid phase. Nanopowder ZnO can lower the specific heat of the fluid. The fluid with the lowest specific heat is nanofluid 0.5% ZnO – coolant. Low specific heat relates to the higher temperature drops. Nanofluid 0.5% ZnO – coolant has the highest temperature drop.

Nanofluid 0.5% ZnO – coolant gives the highest overall heat transfer coefficient than other nanofluids or the base fluid, i.e., 42.7 W/m².°C when its flow rate is 44.2 ml/s. However, nanopowder also increases pressure drop. The pressure drop of nanofluid 0.5% ZnO – coolant is approximately twice that of the base coolant.

REFERENCES

1. Arcoumanis C. Internal Combustion Engine: Elsevier Inc.; 1988.
2. Virale AG, Nitnaware PT. Experimental Analysis of Jacket Cooling of SI Engine And Study of Operating Parameters and Emissions. International Journal of Advances in Engineering & Technology, 2017; 10(1): p. 113-121.
3. Hossain AK, Smith DI, Davi PA. Effects of Engine Cooling Water Temperature on Performance and Emission Characteristics of a Compression Ignition Engine Operated with Biofuel Blend. Journal of Sustainable Development of Energy, Water and Environment Systems Volume 5, Issue 1. 2017; p. 46-57.
4. Gupta M, Singh V, Kumar R, Said Z. A review on thermophysical properties of nanofluids and heat transfer applications. Renewable and Sustainable Energy Reviews Volume 74. 2017; p. 638-670.

5. Senthilraja S, Vijayakumar. Analysis of Heat Transfer Coefficient of CuO / Water Nanofluid using Double Pipe Heat Exchanger. *International Journal of Engineering Research and Technology* Volume 6, Number 5. 2013; p. 675 - 680.
6. Choudhury, Garg, Jha. Study of Nano Particles for Enhanced Heat Transfer Characteristics of Base Fluids for Cool Thermal Energy System. *Int. Journal of Engineering Research and Applications* Vol 4. 2014; p. 97 - 101.
7. Kottasamy, Kadirgama K, Annamalai, Mohanesan, Devarajan, Noor, et al. Titanium oxide with nanocoolant for heat exchanger application. *Journal of Mechanical Engineering and Sciences*. 2017; p. 2834 - 2844.
8. Rao MSE, Sreeramulu D, Naidu DA. Experimental Investigation of Heat transfer rate of Nanofluids using a Shell and Tube Heat exchanger. *IOP Conference Series: Materials Science and Engineering*. 2016; p. 1-8.
9. Aghayari R, Madah, Keyvani, Moghadassi, Ashori. The Effect of Nanoparticles on Thermal Efficiency of Double Tube Heat Exchangers in Turbulent Flow. *ISRN Mechanical Engineering* 2014 (4). 2014; p. 1-5.
10. Albadr, Taya S, Alasadi M. Heat transfer through heat exchanger using Al₂O₃ nanofluid at different concentrations. *Case Studies in Thermal Engineering* Vol 1. 2013; p. 38 - 44.
11. Mahrooghi, Moghiman. Effect of nanoparticles on heat transfer in heat exchangers. *Ciencia e Natura* V. 37. 2015; p. 199 - 206.
12. Mathivanan, Gasior D, Liu L, Yee K, Li Y. Experimental Investigation of the Impact of Nanofluids on Heat Transfer Performance of a Motorcycle Radiator. ; 2017.
13. Mutuku WN. Ethylene glycol (EG)-based nanofluids as a coolant for automotive radiator. *Asia Pac. J. Comput. Engin.* 2016; 3.
14. QASIM M, KAMRAN MS, AMMAR M, Muhammad AJ, YASAR JAVAID. Heat Transfer Enhancement of an Automobile Engine Radiator using ZnO Water Base Nanofluids. *Journal of Thermal Science*. 2020; p. 1-15.
15. Kin Yuen Leong , Saidur R, Kazi SN, Mamun MAH. Performance investigation of an automotive car radiator operated with nanofluid-based coolants (nanofluid as a coolant in a radiator). *Applied Thermal Engineering*. 2010; 30(17-18): p. 2685-2692.
16. Bhagat, More, Khanna PK. Study of Zinc Oxide Nanofluids for Heat Transfer Application. *SAJ Nanoscience and Nanotechnology*. 2015; p. 1 - 7.
17. Krishna VM. Heat Transfer Enhancement by using ZnO - Water Nanofluid in a Concentric Tube Heat Exchanger under Forced Convection Conditions. *International Journal of Innovations in Engineering and Technology (IJJET)* Vol 7. 2016; p. 177 - 184.
18. Suganthi KS, Vinodhan VL, Rajan KS. Heat transfer performance and transport properties of ZnO–ethylene glycol and ZnO–ethylene glycol–water nanofluid coolants. *Applied Energy* Vol 135. 2014; p. 548-559.

nanopowder

ORIGINALITY REPORT

16%

SIMILARITY INDEX

8%

INTERNET SOURCES

15%

PUBLICATIONS

3%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Gianpiero Colangelo, Noemi Francesca Diamante, Marco Milanese, Giuseppe Starace, Arturo de Risi. "A Critical Review of Experimental Investigations about Convective Heat Transfer Characteristics of Nanofluids under Turbulent and Laminar Regimes with a Focus on the Experimental Setup", *Energies*, 2021
Publication 1%

- 2 www.ijcrr.com
Internet Source 1%

- 3 profdoc.um.ac.ir
Internet Source 1%

- 4 Muhammad Qasim, Muhammad Sajid Kamran, Muhammad Ammar, Muhammad Ali Jamal, Muhammad Yasar Javaid. "Heat Transfer Enhancement of an Automobile Engine Radiator using ZnO Water Base Nanofluids", *Journal of Thermal Science*, 2020
Publication 1%

5	K.S. Suganthi, V. Leela Vinodhan, K.S. Rajan. "Heat transfer performance and transport properties of ZnO–ethylene glycol and ZnO–ethylene glycol–water nanofluid coolants", Applied Energy, 2014 Publication	1 %
6	Submitted to Aston University Student Paper	1 %
7	Henrik Sorensen. "Water cooling of high power Light Emitting Diode", 13th InterSociety Conference on Thermal and Thermomechanical Phenomena in Electronic Systems, 2012 Publication	1 %
8	citeseerx.ist.psu.edu Internet Source	1 %
9	W Rashmi, M Khalid, S S Ong, R Saidur. "Preparation, thermo-physical properties and heat transfer enhancement of nanofluids", Materials Research Express, 2014 Publication	<1 %
10	essuir.sumdu.edu.ua Internet Source	<1 %
11	www.intechopen.com Internet Source	<1 %
12	www.irjet.net Internet Source	<1 %

<1 %

13

www.researchgate.net

Internet Source

<1 %

14

Dattatraya G. Subhedar, Bharat M. Ramani, Akhilesh Gupta. " Experimental Investigation of Overall Heat Transfer Coefficient of Al O /Water-Mono Ethylene Glycol Nanofluids in an Automotive Radiator ", Heat Transfer-Asian Research, 2017

Publication

<1 %

15

M. Soltani, Farshad Moradi Kashkooli, Mehdi Alian Fini, Derrick Gharapetian, Jatin Nathwani, Maurice B. Dusseault. "A review of nanotechnology fluid applications in geothermal energy systems", Renewable and Sustainable Energy Reviews, 2022

Publication

<1 %

16

Submitted to The Hong Kong Polytechnic University

Student Paper

<1 %

17

Communications in Computer and Information Science, 2015.

Publication

<1 %

18

Sardarabadi, Mohammad, and Mohammad Passandideh-Fard. "Experimental and numerical study of metal-oxides/water

<1 %

nanofluids as coolant in photovoltaic thermal systems (PVT)", Solar Energy Materials and Solar Cells, 2016.

Publication

19

Submitted to Taylor's Education Group

Student Paper

<1 %

20

actamechanicamalaysia.com

Internet Source

<1 %

21

JOSÉ COCA, GEMMA GUTIÉRREZ, JOSÉM BENITO. "Chapter 1 TREATMENT OF OILY WASTEWATER", Springer Science and Business Media LLC, 2011

Publication

<1 %

22

Manikandan, S., and J. Jancirani. "Review on Heat Transfer Enhancement of Nanofluids - Engine Coolant", Advanced Materials Research, 2014.

Publication

<1 %

23

link.springer.com

Internet Source

<1 %

24

www.ijert.org

Internet Source

<1 %

25

A Akbar, R Firdaus, N Cahyono. "The cooling effectiveness of the V-ixion motorcycle radiator using water coolant variation", IOP Conference Series: Materials Science and Engineering, 2018

<1 %

26

Devendra Purbia, Akshya Khandelwal, Amit Kumar, Arvind Kumar Sharma. "Graphene-water nanofluid in heat exchanger: Mathematical modelling, simulation and economic evaluation", International Communications in Heat and Mass Transfer, 2019

Publication

<1 %

27

Naraki, M., S.M. Peyghambarzadeh, S.H. Hashemabadi, and Y. Vermahmoudi. "Parametric study of overall heat transfer coefficient of CuO/water nanofluids in a car radiator", International Journal of Thermal Sciences, 2013.

Publication

<1 %

28

Serena Askar, Shahram Fotowat, Amir Fartaj. "Transient experimental investigation of airside heat transfer in a crossflow heat exchanger", Applied Thermal Engineering, 2021

Publication

<1 %

29

ebin.pub
Internet Source

<1 %

30

Alexander Moultanovsky. "Mobile HVAC System Evaporator Optimization and Cooling Capacity Estimation by Means of Inverse

<1 %

Problem Solution", Inverse Problems in Engineering, 2002

Publication

31

Behzad Ghobadi, Farshad Kowsary, Farzad Veysi. "Optimization of heat transfer and pressure drop of the channel flow with baffle", High Temperature Materials and Processes, 2021

Publication

<1 %

32

Li, Yanjun, José Fernández-Seara, Kai Du, Ángel Álvarez Pardiñas, Luis Lugo Latas, and Weixue Jiang. "Experimental investigation on heat transfer and pressure drop of ZnO/ethylene glycol-water nanofluids in transition flow", Applied Thermal Engineering, 2016.

Publication

<1 %

33

Munish Gupta, Vinay Singh, Rajesh Kumar, Z. Said. "A review on thermophysical properties of nanofluids and heat transfer applications", Renewable and Sustainable Energy Reviews, 2017

Publication

<1 %

34

Tae Jong Choi, Bimal Subedi, Hyun Jun Ham, Myeong Soo Park, Seok Pil Jang. "A review of the internal forced convective heat transfer characteristics of nanofluids: Experimental features, mechanisms and thermal

<1 %

performance criteria", Journal of Mechanical Science and Technology, 2018

Publication

35

Vermahmoudi, Y., S.M. Peyghambarzadeh, S.H. Hashemabadi, and M. Naraki.

"Experimental investigation on heat transfer performance of /water nanofluid in an air-finned heat exchanger", European Journal of Mechanics - B/Fluids, 2013.

Publication

<1 %

36

Yong-qiang Feng, Rui-Jing Shi, Yu-Zhuang Liu, Xin Wang, Xiu-Zhi Wu, Xiang-Ling Huang, Zhi-Xia He, Tzu-Chen Hung. "Flow and heat transfer characteristics of nano-organic working fluid during evaporation for organic Rankine cycle", Applied Thermal Engineering, 2022

Publication

<1 %

37

libmast.utm.my

Internet Source

<1 %

38

Andrew D. Chiasson. "Geothermal Heat Pump and Heat Engine Systems", Wiley, 2016

Publication

<1 %

39

P. Sivashanmugam. "Chapter 14 Application of Nanofluids in Heat Transfer", IntechOpen, 2012

Publication

<1 %

40

Winifred Nduku Mutuku. "Ethylene glycol (EG)-based nanofluids as a coolant for automotive radiator", Asia Pacific Journal on Computational Engineering, 2016

Publication

<1 %

41

M SIVA ESWARA RAO, DOWLURU SREERAMULU, D ASIRI NAIDU. "Experimental Investigation of Heat transfer rate of Nano fluids using a Shell and Tube Heat exchanger", IOP Conference Series: Materials Science and Engineering, 2016

Publication

<1 %

42

Ray, Dustin R., and Debendra K. Das. "Superior Performance of Nanofluids in an Automotive Radiator", Journal of Thermal Science and Engineering Applications, 2014.

Publication

<1 %

43

Saidur, R.. "A review on applications and challenges of nanofluids", Renewable and Sustainable Energy Reviews, 201104

Publication

<1 %

44

eprints.utm.my

Internet Source

<1 %

Exclude quotes OnExclude matches < 5 wordsExclude bibliography On

