

deace1

by Jonathan Aloysius

Submission date: 23-Nov-2021 12:26PM (UTC+0700)

Submission ID: 1710906602

File name: Aloysius_2021_IOP_Conf._Ser._Earth_Environ._Sci._907_012010.pdf (826.97K)

Word count: 3214

Character count: 16605

PAPER • OPEN ACCESS

Optimization of concentrically braced steel frame structures based on SNI 1726:2019, SNI 1727:2020, SNI 1729:2020, and AISC 341-16

To cite this article: J Aloysius *et al* 2021 *IOP Conf. Ser.: Earth Environ. Sci.* **907** 012010

11

View the [article online](#) for updates and enhancements.

You may also like

- 3 - [Comparative study on using of SNI 1726:2012 and SNI 1726-2019 for calculating of internal force magnitude of lecture building in D.I. Yogyakarta Province](#)
M A T Windarta, D J Jaya and S Widodo
- 15 - [Design, analysis and application of innovative composite PR connections between steel beams and CFT columns](#)
Jong Wan Hu, Eunsoo Choi and Roberto T Leon
- 9 - [On the Frequency Evolution of X-Ray Lightness Oscillations during Thermonuclear X-Ray Bursts: Evidence of Coherent Oscillations](#)
Tod E. Strohmayer and Craig B. Markwardt



The Electrochemical Society
Advancing solid state & electrochemical science & technology

241st ECS Meeting

May 29 – June 2, 2022 Vancouver • BC • Canada
Abstract submission deadline: Dec 3, 2021

Connect. Engage. Champion. Empower. Accelerate.
We move science forward



Submit your abstract



Optimization of concentrically braced steel frame structures based on SNI 1726:2019, SNI 1727:2020, SNI 1729:2020, and AISC 341-16

J Aloysius^{1,2}, J A Sumito¹, D Prayogo¹ and H Santoso¹

¹ Department of Civil Engineering, Faculty of Civil Engineering and Planning, Petra Christian University, Surabaya, Indonesia

² Corresponding author: b11170103@john.petra.ac.id

Abstract. Damages resulted from earthquakes are a loss in the economic sector. The structure of multi-story buildings needs an earthquake-proof design with higher performance to reduce such losses. By utilizing the metaheuristic algorithm, this study aims to identify the most compatible brace configuration and profile used in a concentrically braced steel frame structures with minimal total weight and that will meet the safety requirements. This algorithm is suitable owing to the fact that it is able to find solutions to any known optimization problem either through Particle Swarm Optimization (PSO), Symbiotic Organisms Search (SOS), or Differential Evolution (DE). The performance of these algorithms will demonstrated in a form of comparison through a case study of optimizing a 5-span, 6-story steel frame structure. These systems will determine the lightest frame weight, which also correlates to a lower construction cost, without compromising the constraints of SNI 1726:2019, SNI 1727:2020, SNI 1729:2020, and AISC 341-16. Based on the results of data processing, SOS is shown to achieve the highest algorithm performance compared to PSO and DE.

1. Introduction

The concentrically braced steel frame structure is one of the most effective and economic lateral load-bearing structures [1]. The concentric brace placement is the main factor that affects the structure's performance during an earthquake. Therefore, finding the correct settings of the brace member is one of the main challenges in designing steel frame structure [2]. Although the trial-and-error method is still possible to be used in the field, this does not always lead to the best result due to the sheer number of possibilities of the brace placement. Therefore, the structure incorporates the methodology of optimizing the angles of diagonal members along the height of multi-story buildings in the context of brace-placement optimization [3].

Based on Oteiza, Rodriguez, and Brignole, metaheuristics are able to solve multiple-objective multiple-solutions and nonlinear formulations, so they are utilized to settle high-quality solutions to increasingly complex real-world problems, namely the combinatorial ones [4]. Furthermore, these algorithms are calculated for optimization problems that are elaborate where the traditional heuristics and optimization algorithms show the ineffectiveness and inefficiency. Officially, a metaheuristic can be elucidated as the generation process that is continual, so it can lead a subordinate heuristic with intelligent combinations of various concepts for exploring and exploiting the search space. Moreover, the learning strategies can be applied to structure information to find the efficient near-optimal results



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

[5]. Structural optimization can be done through several metaheuristic algorithms, e.g., Genetic Algorithm (GA) [6], Ant Colony Optimization (ACO) [7], Differential Evolution (DE) [8], Particle Swarm Optimization (PSO) [9], and Symbiotic Organisms Search (SOS) [10].

The main benefit of the PSO algorithm lies in its simple concept, easy implementation procedures, and efficiency in its calculation [11], whereas the main benefit of SOS requires no specific parameter for its operation unlike the other algorithms [10]. DE is the evolution of GA, with a shorter calculation time and fewer iterations in its optimization process [12].

There has been a study on the optimization of concentrically braced steel frame structures on 3-story and 5-story buildings using various metaheuristic algorithms [13]. That study succeeded in showing the better standard deviation of DE compared to GA, ACO, Big Bang–Big Crunch (BB-BC), and PSO. This study investigates the behavior of a mid-rise building because in order to examine a new approach, the study of a building with simpler behavior needs to be conducted first. A 6-story building is considered as a representative of a mid-rise building. If this study is successful, it can be applied to a higher level of building.

This study aims to discover which metaheuristic algorithm has the best performance in finding the most compatible brace configuration and profile to design a structure with minimal total weight, and satisfies the safety standard. This paper discusses the optimization based on PSO, SOS, and DE algorithms, and summarizes optimization results of the multi-story steel structure based on SNI 1726:2019, SNI 1727:2020, SNI 1729:2020, and AISC 341-16.

2. Metaheuristic Algorithms

A metaheuristic is an advanced-level mechanism that guides the searching process in a certain space sufficiently to produce the best and optimal solution to be applied to various problems [14]. Metaheuristic can be viewed as a general framework that can be applied to various optimization problems with relatively few modifications to adapt to a certain condition. Metaheuristic plays a huge role in solving various optimization problems, especially in the civil engineering world where an optimal result is always demanded, both in terms of the design and its implementation.

The aim of this study is to minimize the total weight of the structure. The objective function of this study is as follows:

$$f(X) = \gamma \sum_{i=1}^n A_i L_i \quad (1)$$

where $f(X)$ is objective function, γ is the density, A_i is the cross sectional area of i th member, and L_i is the length of i th member.

In order to optimize the brace configuration and profile used in steel frame structures, constraints are used to ensure the design result will not fail. The inter-story drift and stability requirements are taken from SNI 1726:2020 in which design story drift should not exceed 2% of the story height below level x , and the value of θ should not be higher than 0.01 to make sure the P-Delta effect is not included. The profile capacity should satisfy the requirements of both AISC 341-16 and SNI 1729:2020 specification. The structures need to be checked using the interaction formula taken from SNI 1729:2020 to make sure the combination of axial and bending forces does not cause the structures to fail. Members also need to satisfy the profile capacity requirements and the interaction formula when the structures are applied with capacity design concept as a structure is loaded with the yielding forces of the braces in exchange for the earthquake loads. Table 1 shows the constraints used in the optimization process are based on SNI 1726:2019, SNI 1729:2020, and AISC 341-16.


Table 1. Constraints used in optimization process.

	Constraint	Design Requirements	Designation Code
$g_1(X)$	Inter-story drift	$\leq 0.02h_{sx}$	SNI 1726:2019
$g_2(X)$	Stability	≤ 0.01	SNI 1726:2019
$g_3(X)$	Profile capacity	$\leq R_u$	AISC 341-16 and SNI 1729:2020
$g_4(X)$	Interaction formula	≤ 1	SNI 1729:2020
$g_5(X)$	Capacity design	$\leq g_3(X), g_4(X)$	AISC 341-16 and SNI 1729:2020

3. Methodology

There are three main phases of this optimization: the analysis of the structure using the Finite Element Method – Direct Stiffness Method (DSM) phase; the search for the structure element profile and optimized brace configuration using the metaheuristic algorithm phase; and the comparison of the optimized result from the PSO, SOS, and DE algorithm phase. The process of structure analysis calculation and optimization with the algorithm is carried out using MATLAB R2017b software. There are 4 different design codes used in this study, which are SNI 1727:2020 [15] for the dead load and live load calculation, SNI 1726:2019 [16] for earthquake load calculation, SNI 1729:2020 [17] for structural steel building's specification, and AISC 341-16 [18] for structural steel building's seismic provisions.

The structure is subjected to a load according to SNI 1727:2020 [15] and then analyzed in order to acquire data in the form of bending moment and axial tension as well as the necessary displacement to be checked against the limits/constraints listed in the requirements for SNI 1726:2019 [16], SNI 1729:2020 [17], and AISC 341-16 [18]. After the first phase, the optimization phase is done using PSO, SOS, and DE algorithms in order to find the structure element profile, the optimal brace configuration, and the lightest total structure weight for the concentrically braced steel frame. The total weight of the frame structure is an objective function with the aim of finding the lightest weight. Total weight of the structure, deviation standard, mean value, and success rate from PSO, SOS, and DE will be compared to determine which algorithm produces the lightest weight efficiently and consistently. The research flowchart is shown in Figure 1.

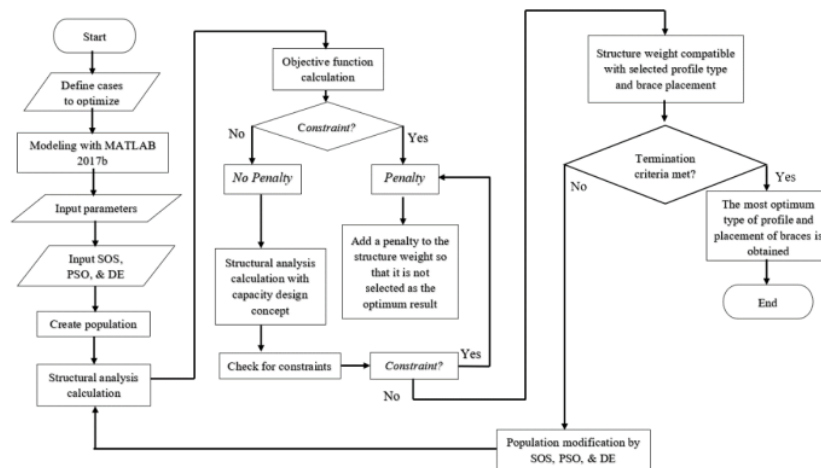**Figure 1.** Research Flowchart.

4. Result and discussion

Figure 2 shows a 5-span, 6-story frame structure with element numbering. This structure bears a distributed vertical load on each beam, with a dead load of 6.3 kN/m² and a live load of 1.96 kN/m². The elements' grouping is as follows:

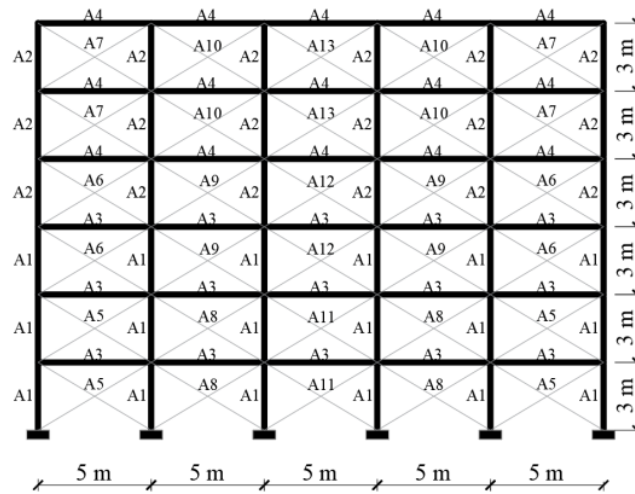


Figure 2. Front view of a 5-span, 6-story frame structure.

The material properties, geometry, and earthquake load of the frame structure are as follow:

Material properties

$\rho = 78.5$ (kN/m³), $E = 2e8$ (kN/m²), $\mu = 0.3$, and $f_y = 248.2$ (MPa)

Geometry

Height of each floor = 3.0 m

Width of the frame = 5.0 m

Three degrees of freedom for each joint (x , y -translations and z -rotation)

All connections and supports are rigid

Earthquake load

Earthquake concentrated loads are calculated according to SNI 1726-2019 [16] by considering:

$R = 6$, $I = 1$, $S_s = 0.75$, $S_1 = 0.35$, and seismic design category = E

Earthquake loads acting on 5-span, 6-story frame are shown in table 2.

Table 2. Earthquake loads acting on 6-story frame.

Floor	Earthquake Load (kN)
1	37.37
2	74.75
3	112.12
4	149.49
5	186.87
6	217.43
Base shear	778.02

Hyperparameter of algorithms

The hyperparameters of the algorithms are as follow:

PSO: $w = 1$, $c_1 = 2$, and $c_2 = 2$

DE: $F_{\max} = 2$, $F_{\min} = 0$, and $CR = 0,5$.

The optimization of this structure uses an HSS profile for braces based on ASTM A1085. The W profile for the beams and columns is taken from the steel profile table [19]. All data used from the table are calculated thoroughly to ensure the given constraints are not breached. A trial is considered a success if the algorithm is able to produce a value that has not broken any constraint at the last iteration. Based on 30 trials on each of the algorithms, it is found that SOS displays a significant margin of error as it fails to find the optimal solution 11 times compared with DE, which only failed 3 times. However, SOS manages to produce the smallest mean value and standard deviation value out of all, producing 447.74 kN and 67.48 kN while DE as the runner-up generates 464.75 kN and 171.29 kN, respectively. Even though PSO manages to complete 25 out of 30 trials and produces the second-best standard deviation value of 80.19 kN, it still demonstrates the worst performance compared to DE and SOS due to having the biggest mean value of 686.30 kN. In terms of producing the minimum (best) result, SOS and DE are on par because both produce the same number of 350.04 kN while PSO further demonstrate its under-performed capability by producing the largest minimum structure weight of 545.05 kN. Even so, PSO's maximum (worst) result is better than DE with 820.99 kN, weighing up to DE's maximum result of 1028.11 kN while SOS constructs the best result because it constructs the maximum value of 572.29 kN. SOS's failure in consistency of the trial's success is probably due to random initial solutions that were not quite compatible with the constraints and its lack of ability to explore new variables, which results in a value that does not satisfy the constraints. However, SOS excels in exploiting the values it has produced. That is why it has the consistency of producing the minimum result that can be seen from the mean and standard deviation value. Table 3 compares the optimization results of PSO, SOS and DE.

Table 3. Optimization results of 5-span, 6-story frame structure.

Variable	PSO	SOS	DE
A1	0.03607 m ²	0.02224 m ²	0.02224 m ²
A2	0.03076 m ²	0.01077 m ²	0.01077 m ²
A3	0.03098 m ²	0.02355 m ²	0.02355 m ²
A4	0.01077 m ²	0.01077 m ²	0.01077 m ²
A5	0	0	0
A6	0	0	0
A7	0	0.00155 m ²	0.00155 m ²
A8	0.00232 m ²	0.00155 m ²	0.00155 m ²
A9	0	0	0
A10	0	0	0
A11	0	0	0
A12	0.00241 m ²	0.00155 m ²	0.00155 m ²
A13	0.00167 m ²	0	0
Min (kN)	545.05	350.04	350.04
Max (kN)	820.99	572.29	1028.11
Mean (kN)	686.30	447.74	464.75
Standard Deviation	80.19	67.48	171.29
Success Rate	25/30	19/30	27/30
Running Time (hr)	50.09	203.24	47.84

Figure 3 shows the brace placement of the 5-span, 6-story concentrically braced steel frame structure using PSO, SOS, and DE (from left to right, respectively).

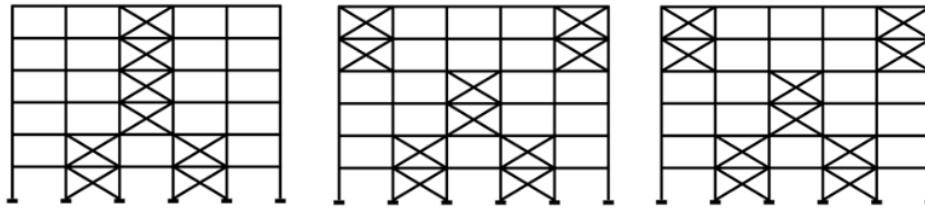


Figure 3. Brace placement of the 5-span, 6-story concentrically braced steel frame structure.

According to the convergence graph shown in figure 4, the DE algorithm is able to produce the most optimal result at the end of the iteration, whereas the SOS is able to produce an optimal result albeit not as light as DE. On the other hand, PSO is shown to construct the heaviest structure weight among all three algorithms. Therefore, it can be said that the performance of DE algorithm is similar to SOS as both of their system processes and final structure share a fair amount of resemblance. Meanwhile, PSO still displays inferiority compared to the other two algorithms in terms of finding the used profile and brace placement in the 5-span, 6-story frame structure.

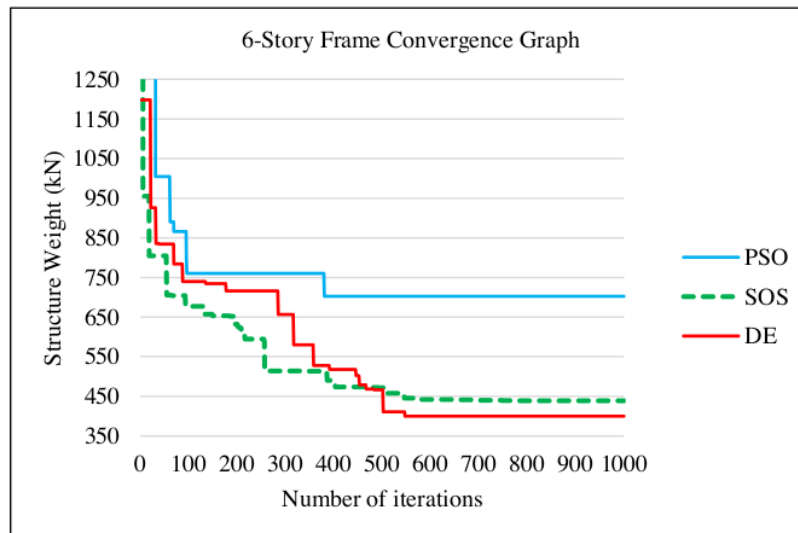


Figure 4. 6-story frame convergence graph

5. Conclusion

Based on the above results, the metaheuristic algorithm proves to be successful in finding the the most compatible brace configuration and profile for a 5-span, 6-story concentrically braced steel frame structure with minimal total weight that satisfies the safety standard. SOS and DE proved to be superior to PSO in the ability to find a lighter total weight structure. Moreover, SOS also has a lower standard deviation and mean value compared to PSO and DE, but lacks consistency in finding optimal results. This result can be seen from the lower success rate than DE. The low success rate is concluded

from the initial random that does not satisfy the constraints and the lack of ability of SOS in exploration. Nonetheless, SOS also has advantages over DE, namely the average experimental results and standard deviation. These two points are less than DE because SOS has the benefit in exploitation of existing results.

References

- [1] Broderick B, Hunt A, Mongabure P, LeMaoult A, Goggins J, Salawdeh S, et al 2015 Assessment of the Seismic Response of Concentrically-Braced Steel Frames Brian *Exp Res Earthq Eng*
- [2] Hassanzadeh A, Gholizadeh S 2019 Collapse-performance-aided design optimization of steel concentrically braced frames *Eng Struct* **197** 1-15
- [3] Stromberg L, Beghini A, Baker W, Paulino G 2011 Application of layout and topology optimization using pattern gradation for the conceptual design of buildings *Struct Multidiscip Optim* **43** 165–80
- [4] Otieza PP, Rodriguez DA, Brignole NB 2018 Parallel cooperative optimization through hyperheuristics *Computer Aided Chemical Engineering* **44** 805-810
- [5] Osman IH, Laporte G 1996 Metaheuristics: a bibliography *Ann Oper Res* **63** 513-623
- [6] Goldberg DE, Holland JH 1988 Genetic Algorithms and Machine Learning Metaphors *Mach Learn* **3** 95–9
- [7] Dorigo M, Maniezzo V, Colomi A 1996 Ant system: Optimization by a colony of cooperating agents *IEEE Trans Syst Man, Cybern Part B Cybern* **26** 1–13
- [8] Storn R, Price K 1997 Differential Evolution – A Simple and Efficient Heuristic for Global Optimization over Continuous Spaces *Australas Plant Pathol* **11** 341–59
- [9] Eberhart R, Kennedy J 1995 New optimizer using particle swarm theory *Proc Int Symp Micro Mach Hum Sci* **39**–43
- [10] Cheng MY, Prayogo D 2014 Symbiotic Organisms Search: A new metaheuristic optimization algorithm *Comput Struct* **139** 98–112
- [11] Rini DP, Shamsuddin SM 2011 Particle Swarm Optimization: Technique, System and Challenges *Int J Appl Inf Syst* **1** 33–45
- [12] Fajarwati IA, Anggraeni W 2012 Penerapan Algoritma Differential Evolution untuk Penyelesaian Permasalahan Vehicle Routing Problem with Delivery and Pick-up *Jurnal Teknik ITS*
- [13] Kaveh A, Farhoudi N 2015 Layout Optimization of Braced Frames Using Differential Evolution Algorithm and Dolphin Echolocation Optimization *Period Polytech Civ Eng* **59** 441–449
- [14] Blum C, Roli A 2003 Metaheuristics in Combinatorial Optimization: Overview and Conceptual Comparison *ACM Comput Surv* **35** 268–308
- [15] Badan Standardisasi Nasional 2020 *Beban desain minimum dan Kriteria terkait untuk bangunan gedung dan struktur lain SNI 1727:2020* (Jakarta: Author)
- [16] Badan Standardisasi Nasional 2019 *Tata cara perencanaan ketahanan gempa untuk struktur bangunan gedung dan nongedung SNI 1726:2019* (Jakarta: Author)
- [17] Badan Standardisasi Nasional 2020 *Spesifikasi untuk bangunan gedung baja struktural SNI 1729:2020* (Jakarta: Author)
- [18] American Institute of Steel Construction 2016 *Seismic Provisions for Structural Steel Buildings AISC 341-16* (Chicago: Author)
- [19] Gunawan R, Morisco 1988 *Tabel Profil Konstruksi Baja* (Yogyakarta: Kanisius)

ORIGINALITY REPORT

16%

SIMILARITY INDEX

7%

INTERNET SOURCES

15%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

- 1** L Kristanto, W W Canadarma, E S Wijaya. "Comparison of Shibataea kumasasa and Equisetum hyemale as vertical greenery system for thermal and light shade in student's architectural design studio in Surabaya", IOP Conference Series: Earth and Environmental Science, 2021
Publication 2%

- 2** mafiadoc.com
Internet Source 2%

- 3** N S Nugroho, Erizal, H Putra. "Structure evaluation of building based on the earthquake response acceleration spectrum of the SNI 03-1726-2019", IOP Conference Series: Earth and Environmental Science, 2021
Publication 2%

- 4** Aydin Hassanzadeh, Saeed Gholizadeh. "Collapse-performance-aided design optimization of steel concentrically braced frames", Engineering Structures, 2019
Publication 1%

5	Christian Blum. "Metaheuristics in combinatorial optimization", ACM Computing Surveys, 9/1/2003 Publication	1 %
6	A. Kaveh, N. Farhoudi. "Dolphin monitoring for enhancing metaheuristic algorithms: Layout optimization of braced frames", Computers & Structures, 2016 Publication	1 %
7	A. Kaveh, N. Farhoudi. "A unified approach to parameter selection in meta-heuristic algorithms for layout optimization", Journal of Constructional Steel Research, 2011 Publication	1 %
8	"EngOpt 2018 Proceedings of the 6th International Conference on Engineering Optimization", Springer Science and Business Media LLC, 2019 Publication	1 %
9	china.iopscience.iop.org Internet Source	1 %
10	Paola P. Oteiza, Diego A. Rodríguez, Nélide B. Brignole. "Parallel cooperative optimization through hyperheuristics", Elsevier BV, 2018 Publication	1 %
11	multisitestaticcontent.uts.edu.au Internet Source	1 %

12

coek.info

Internet Source

1 %

13

Saeed Gholizadeh, Aydin Hassanzadeh, Arman Milany, Hamid Farrokh Ghatte. "On the seismic collapse capacity of optimally designed steel braced frames", *Engineering with Computers*, 2020

Publication

1 %

14

tel.archives-ouvertes.fr

Internet Source

1 %

15

worldwidescience.org

Internet Source

1 %

16

www.frontiersin.org

Internet Source

1 %

Exclude quotes On

Exclude matches < 1%

Exclude bibliography On