



buildings

IMPACT
FACTOR
2.648

CITESCORE
4.2
SCOPUS



Daylighting Performance of Split Louver with Simplified Parametric Control

Volume 12 • Issue 5 | May 2022



mdpi.com/journal/buildings
ISSN 2075-5309

Search:

Title / Keyword

Author / Affiliation / Email

Buildings

All Article Types

Search

Advanced

Journals / Buildings / Volume 12 / Issue 5

IMPACT
FACTOR
3.8CITESCORE
3.1

Submit to Buildings

Review for Buildings

Journal Menu

- Buildings Home
- Aims & Scope
- Editorial Board
- Reviewer Board
- Topical Advisory Panel
- Instructions for Authors
- Special Issues
- Topics
- Sections & Collections
- Article Processing Charge
- Indexing & Archiving
- Editor's Choice Articles
- Most Cited & Viewed
- Journal Statistics
- Journal History
- Journal Awards
- Society Collaborations
- Editorial Office

Journal Browser

volume

▼

issue

▼

Go

- › Forthcoming issue
- › Current issue

Vol. 14 (2024)
Vol. 13 (2023)
Vol. 12 (2022)
Vol. 11 (2021)
Vol. 10 (2020)
Vol. 9 (2019)
Vol. 8 (2018)
Vol. 7 (2017)
Vol. 6 (2016)
Vol. 5 (2015)
Vol. 4 (2014)
Vol. 3 (2013)
Vol. 2 (2012)
Vol. 1 (2011)

Affiliated Society:



Buildings, Volume 12, Issue 5 (May 2022) – 199 articles



Cover Story (view full-size image): Different shading systems and controls, particularly for fully glazed facades, should be used in different parts of a window system to accomplish different functions. The split louver is a significant component of automated building systems for improving overall daylighting performance. This research studied an overarching framework for developing a reflective split louver with two sections based on a simplified parametric control to illuminate the deep room space. The proposed control of the split louver has the potential to provide a glare-free environment and more uniform daylight coverage of up to 100% of the floor area within a desired illuminance range (150–750 lux). View this paper

- Issues are regarded as officially published after their release is announced to the table of contents alert mailing list.
- You may sign up for e-mail alerts to receive table of contents of newly released issues.
- PDF is the official format for papers published in both, html and pdf forms. To view the papers in pdf format, click on the "PDF Full-text" link, and use the free Adobe Reader to open them.

Order results

Publication Date

▼

Result details

Normal

▼

Section

All Sections

▼

Show export options ▼

[Open Access](#) [Article](#) 23 pages, 5314 KiB

LCIA Parameters and the Role of BIM towards Sustainability: Regional and Temporal Trends

by Tayyab Ahmad and Muhammad Jamaluddin Thaheem
Buildings 2022, 12(5), 700; <https://doi.org/10.3390/buildings12050700> - 23 May 2022
Viewed by 1748

Abstract Building materials with a low environmental impact are critical to the sustainability of the built environment. The environmental impact of materials can be determined by a Life Cycle Impact Assessment (LCIA), which constitutes multiple parameters such as the water used in a material's [...] Read more.
(This article belongs to the Special Issue State-of-the-Art Studies of Green and Sustainable Building Materials)

► Show Figures

[Open Access](#) [Article](#) 20 pages, 7103 KiB

The Strength in Axial Compression of Aluminum Alloy Tube Confined Concrete Columns with a Circular Hollow Section: Experimental Results

by Di Zhao, Jigang Zhang, Ling Lu, Haizhi Liang and Zhehao Ma
Buildings 2022, 12(5), 699; <https://doi.org/10.3390/buildings12050699> - 23 May 2022
Cited by 7 | Viewed by 1816

Abstract Steel tube confined concrete (STCC) stub columns have great strength and facilitate construction. In this study, the axial compressive strength of an aluminum alloy tube confined concrete column with (ATCC-CHS) and without (ATCC) a circular hollow section was tested in laboratory experiments. The [...] Read more.
(This article belongs to the Special Issue Resilience-Based Structural Seismic Design and Evaluation)

► Show Figures

[Open Access](#) [Article](#) 16 pages, 5095 KiB

Axial Compression Prediction and GUI Design for CCFST Column Using Machine Learning and Shapley Additive Explanation

by Xuerui Liu, Yanqi Wu and Yisong Zhou
Buildings 2022, 12(5), 698; <https://doi.org/10.3390/buildings12050698> - 23 May 2022
Cited by 3 | Viewed by 1628

Abstract Axial bearing capacity is the key index of circular concrete-filled steel tubes (CCFST). A hybrid PSO-ANN model consisting of an artificial neural network (ANN) optimized with particle swarm algorithm (PSO) was proposed to reliably and accurately predict the axial bearing capacity in this [...] Read more.
(This article belongs to the Special Issue Composite Structural Members in the Building Sector: From Design to Materials)

► Show Figures

[Open Access](#) [Article](#) 16 pages, 2699 KiB

The Optimal Determination of the Truncation Time of Non-Exponential Sound Decays

by Min Chen and Chang-Myung Lee
Buildings 2022, 12(5), 697; <https://doi.org/10.3390/buildings12050697> - 23 May 2022
Viewed by 1349

Abstract The noise effects in the room impulse response (RIR) make the decay range of the integrated impulse response insufficient for reliable determination of reverberation time (RT). One of the preferred techniques to minimize noise effects is based on noise subtraction, RIR truncation, and [...] Read more.
(This article belongs to the Special Issue Advances in Architectural Acoustics)

► Show Figures

[Open Access](#) [Article](#) 26 pages, 295 KiB

Classification of Key Elements of Construction Project Complexity from the Contractor Perspective

by Marin Nikolić and Anita Cerić
Buildings 2022, 12(5), 696; <https://doi.org/10.3390/buildings12050696> - 23 May 2022
Cited by 7 | Viewed by 3504

Abstract Contractors are facing an increasing degree of complexity in their construction projects. Due to inadequately prepared project plans, they have been suffering significant losses during the execution of construction projects. One of the key disadvantages of such plans is that during the planning [...] Read more.
(This article belongs to the Topic Advances in Construction and Project Management)

[Open Access](#) [Review](#) 23 pages, 2773 KiB

The Private Sector Role as a Key Supporting Stakeholder towards Circular Economy in the Built Environment: A Scientometric and Content Analysis

by Oluwatobi Mary Owojori and Chioma Okoro
Buildings 2022, 12(5), 695; <https://doi.org/10.3390/buildings12050695> - 23 May 2022
Cited by 9 | Viewed by 3146

Abstract The United Nations (UN) 2030 Agenda, borne from the most inclusive policy dialogue ever, emphasized partnerships built upon collaboration to achieve sustainable goals, as documented in SDG17. However, the building and construction sector has been experiencing sustainability issues, leading to several traditional government-led [...] Read more.
(This article belongs to the Topic Sustainable Built Environment)

► Show Figures

[Open Access](#) [Article](#) 20 pages, 6699 KiB

Some Issues in the Seismic Assessment of Shear-Wall Buildings through Code-Compliant Dynamic Analyses

by Maria Cristina Porcu, Juan Carlos Vielma Pérez, Gavino Pais, Diego Osorio Bravo and Juan Carlos Vielma Quintero
Buildings 2022, 12(5), 694; <https://doi.org/10.3390/buildings12050694> - 23 May 2022
Cited by 5 | Viewed by 2264

Abstract Due to their excellent seismic behavior, shear wall-type concrete buildings are very popular in earthquake-prone countries like Chile. According to current seismic regulations, the performance of such structures can be indifferently assessed through linear or non-linear methods of analysis. Although all the code-compliant [...] Read more.
(This article belongs to the Special Issue Seismic Performance Assessment and Analysis of Buildings Structures and Critical Infrastructure)

► Show Figures

[Open Access](#) [Article](#) 15 pages, 5953 KiB

Numerical Analysis of Shallow Foundations with Varying Loading and Soil Conditions

by Muhammad Rehan Hakro, Aneel Kumar, Mujahid Ali, Agha Faizal Habib, Afonso R. G. de Azevedo, Roman Feduk, Mohamed Muayad Sabri Sabri, Abdelatif Sami and Yousef Ahmed Awad
Buildings 2022, 12(5), 693; <https://doi.org/10.3390/buildings12050693> - 23 May 2022
Cited by 3 | Viewed by 3407

Abstract The load–deformation relationship under the footing is essential for foundation design. Shallow foundations are subjected to changes in hydrological conditions such as rainfall and drought, affecting their saturation level and conditions. The actual load–

[Open Access](#) [Article](#)22 pages, 8175 KB [Download](#)

Prototyping a Lighting Control System Using LabVIEW with Real-Time High Dynamic Range Images (HDRIs) as the Luminance Sensor

by [Aris Buhiyento](#) and [Yun-Shang Chio](#)*Buildings* **2022**, *12*(5), 649; <https://doi.org/10.3390/buildings12050649> - 13 May 2022

Cited by 2 | Viewed by 2045

Abstract Lighting control systems (LCSs) play important roles in maintaining visual comfort and energy savings in buildings. This paper presents a prototype LCS using LabVIEW with real-time high dynamic range images and a digital multiplex controller to brighten lamps sequentially to provide visual comfort. [...] [Read more](#)

(This article belongs to the Special Issue Indoor Environmental Quality and Occupant Comfort)

[► Show Figures](#)[Open Access](#) [Article](#)25 pages, 10991 KB [Download](#)

Compressive Behavior of a Fully Prefabricated Lifiable Connection for Modular Steel Construction

by [En-Feng Deng](#), [Jun-Yi Lian](#), [Zhe Liu](#), [Guang-Cao Zhang](#), [Shi-Bo Wang](#) and [Dian-Bin Cao](#)*Buildings* **2022**, *12*(5), 649; <https://doi.org/10.3390/buildings12050649> - 13 May 2022

Cited by 9 | Viewed by 2412

Abstract Modular steel construction (MSC) consists of the off-site prefabrication of a fully finished module and the on-site assembling of the module unit. The popularity of MSC is on the rise, attributable to its technical advantages of speed and quality of buildings with repetitive [...] [Read more](#)

(This article belongs to the Special Issue High-Performance Steel–Concrete Composite Structures)

[► Show Figures](#)[Open Access](#) [Article](#)23 pages, 8284 KB [Download](#)

Experimental Characterization of Raw Earth Properties for Modeling Their Hygrothermal Behavior

by [Yassine Elias Belarbi](#), [Mohamed Sawadogo](#), [Philippe Poulain](#), [Nabil Issaadi](#), [Ameur El Amine Hamami](#), [Stéphanie Bonnet](#) and [Rafik Belarbi](#)*Buildings* **2022**, *12*(5), 648; <https://doi.org/10.3390/buildings12050648> - 12 May 2022

Cited by 5 | Viewed by 1955

Abstract Raw earth is one of the oldest building materials of mankind. Almost a third of the world's population is living in an earth-based house. However, their use remains low compared to conventional materials such as concrete, steel, and wood. Although these geosourced materials [...] [Read more](#)

(This article belongs to the Topic Sustainable Building Structures)

[► Show Figures](#)[Open Access](#) [Article](#)19 pages, 3547 KB [Download](#)

Software for the Multi-Criteria Design of the External Walls Based on User Priority

by [Jiří Majer](#), [Nikola Vavřinová](#), [Kateřina Stejskalová](#) and [Lenka Pentková](#)*Buildings* **2022**, *12*(5), 647; <https://doi.org/10.3390/buildings12050647> - 12 May 2022

Cited by 4 | Viewed by 1510

Abstract The external walls of buildings account for a substantial part of the financial costs of the entire construction, and there can be a loss of up to 35% of thermal energy through them. By properly optimizing the price for the construction of m [...] [Read more](#)

(This article belongs to the Special Issue Advanced Residential and Commercial Building Envelope Systems Evaluation)

[► Show Figures](#)[Open Access](#) [Article](#)11 pages, 4659 KB [Download](#)

Bearing Capacity of Annular Foundations on Rock Mass with Heterogeneous Disturbance by Finite Element Limit Analysis

by [Bo Sung Kim](#), [O-il Kwon](#), [Yong Hyuk Choi](#) and [Joon Kyu Lee](#)*Buildings* **2022**, *12*(5), 646; <https://doi.org/10.3390/buildings12050646> - 12 May 2022

Viewed by 1351

Abstract Estimating the performance of foundations on rock mass is essential in designing buildings. Stability assessment of weathered rocks under foundation load is a complicated task if there is an internal opening within the foundation. This study applies finite element limit analysis to evaluate [...] [Read more](#)

(This article belongs to the Section Building Structures)

[► Show Figures](#)[Open Access](#) [Feature Paper](#) [Article](#)15 pages, 4810 KB [Download](#)

Dynamic Data Feeding into BIM for Facility Management: A Prototype Application to a University Building

by [Jonatan Villavicencio Moreno](#), [Rita Machete](#), [Ana Paula Falcão](#), [Alexandre B. Gonçalves](#) and [Rita Bento](#)*Buildings* **2022**, *12*(5), 645; <https://doi.org/10.3390/buildings12050645> - 12 May 2022

Cited by 12 | Viewed by 2811

Abstract Building information modelling (BIM) has demonstrated its potential as a solution providing support to a series of operations related to facility management (FM) through building data retrieval, analysis, and processing. However, some challenges to the effective adoption of BIM-centred FM information systems occur [...] [Read more](#)

(This article belongs to the Special Issue Advanced BIM Application in Construction and Buildings)

[► Show Figures](#)[Open Access](#) [Article](#)18 pages, 5912 KB [Download](#)

Calculation of Additional Internal Forces in Post-Tensioned Prestressed Concrete Frame Columns Based on Equivalent Lateral Stiffness

by [Li Wang](#), [Donghui Cheng](#), [Enxiang Qu](#), [Daoming Zhang](#) and [Chun Lv](#)*Buildings* **2022**, *12*(5), 644; <https://doi.org/10.3390/buildings12050644> - 12 May 2022

Cited by 4 | Viewed by 1594

Abstract The additional internal forces in vertical members caused by prestressed tendons are typically overlooked in the design of post-tensioned prestressed concrete. A calculation method for additional internal forces in single-story multi-span prestressed concrete frame columns based on equivalent lateral stiffness is proposed in [...] [Read more](#)

(This article belongs to the Section Building Structures)

[► Show Figures](#)[Open Access](#) [Article](#)30 pages, 4918 KB [Download](#)

Selecting an Appropriate Configuration in a Construction Project Using a Hybrid Multiple Attribute Decision Making and Failure Analysis Methods

by [Ali Belki Ashkezari](#), [Mahsa Zokaei](#), [Amir Aghsami](#), [Fariborz Jolai](#) and [Maziar Yazdani](#)*Buildings* **2022**, *12*(5), 643; <https://doi.org/10.3390/buildings12050643> - 11 May 2022

Cited by 7 | Viewed by 2132

Abstract To successfully complete a project, selecting the most appropriate construction method and configuration is critical. There are, however, plenty of challenges associated with these complex decision-making processes. Clients require projects with the desired cost, time, and quality, so contractors should trade-off project goals [...] [Read more](#)

(This article belongs to the Special Issue Construction Management and Disaster Risk Management)

[► Show Figures](#)[Open Access](#) [Article](#)29 pages, 9636 KB [Download](#)

Detailed Structural Characterization of Existing RC Buildings for Seismic Exposure Modelling of the Lisbon Area

by [Váiter Xavier](#), [Rita Couto](#), [Ricardo Monteiro](#), [José Miguel Castro](#) and [Rita Bento](#)*Buildings* **2022**, *12*(5), 642; <https://doi.org/10.3390/buildings12050642> - 11 May 2022

Cited by 1 | Viewed by 2028

Abstract As many European countries, the Portuguese territory is a region of moderate seismicity, and a large part of its building stock includes reinforced concrete (RC) buildings built before the introduction of modern seismic codes (<1983s). Currently, the Lisbon building stock is composed of [...] [Read more](#)

(This article belongs to the Special Issue Assessment and Retrofit of Buildings)

[► Show Figures](#)[Open Access](#) [Article](#)21 pages, 4736 KB [Download](#)

AlphaTruss: Monte Carlo Tree Search for Optimal Truss Layout Design

by [Ruifeng Luo](#), [Yifan Wang](#), [Weifang Xiao](#) and [Xianzhong Zhao](#)*Buildings* **2022**, *12*(5), 641; <https://doi.org/10.3390/buildings12050641> - 11 May 2022

Cited by 8 | Viewed by 2185

Abstract Truss layout optimization under complex constraints has been a hot and challenging problem for decades that aims to find the optimal node locations, connection topology between nodes, and cross-sectional areas of connecting bars. Monte Carlo Tree Search (MCTS) is a reinforcement learning search [...] [Read more](#)

(This article belongs to the Special Issue Application of Emerging Technologies to Improve Construction Performance)

[► Show Figures](#)[Open Access](#) [Article](#)10 pages, 4078 KB [Download](#)

Search:

Search

Advanced

[Journals](#) / [Buildings](#) / [Editorial Board](#)[Submit to Buildings](#)[Review for Buildings](#)

Journal Menu

- * [Buildings Home](#)
- * [Aims & Scope](#)
- * [Editorial Board](#)
- * [Reviewer Board](#)
- * [Topical Advisory Panel](#)
- * [Instructions for Authors](#)
- * [Special Issues](#)
- * [Topics](#)
- * [Sections & Collections](#)
- * [Article Processing Charge](#)
- * [Indexing & Archiving](#)
- * [Editor's Choice Articles](#)
- * [Most Cited & Viewed](#)
- * [Journal Statistics](#)
- * [Journal History](#)
- * [Journal Awards](#)
- * [Society Collaborations](#)
- * [Editorial Office](#)

Journal Browser

- > [Forthcoming issue](#)
- > [Current issue](#)

Vol. 14 (2024)
Vol. 13 (2023)
Vol. 12 (2022)
Vol. 11 (2021)
Vol. 10 (2020)
Vol. 9 (2019)
Vol. 8 (2018)
Vol. 7 (2017)
Vol. 6 (2016)
Vol. 5 (2015)
Vol. 4 (2014)
Vol. 3 (2013)
Vol. 2 (2012)
Vol. 1 (2011)

An innovative social network for researchers and scholars

Set up your profile to start global scholarly communication

SCIPROFILES.COM

Affiliated Society:



Editorial Board

- [Building Structures Section](#)
- [Building Materials, and Repair & Renovation Section](#)
- [Building Energy, Physics, Environment, and Systems Section](#)
- [Architectural Design, Urban Science, and Real Estate Section](#)
- [Construction Management, and Computers & Digitization Section](#)

Please note that the order in which the Editors appear on this page is alphabetical, and follows the structure of the editorial board presented on the MDPI website under information for editors. editorial board responsibilities.

Members



Prof. Dr. David Arditi Website
Editor-in-Chief

Construction Engineering and Management Program, Department of Civil, Architectural, and Environmental Engineering, Illinois Institute of Technology, 3201 South Dearborn Street, Chicago, IL 60616, USA
Interests: construction management; organizational theory; conflict resolution; optimal bidding strategies; project delivery systems; sustainability; linear scheduling methods; stochastic simulation; information technologies
Special Issues, Collections and Topics in MDPI Journals



Prof. Dr. Bjorn Birgisson Website
Associate Editor

School of Environmental, Civil, Agricultural and Mechanical Engineering, International Fellow, Royal Swedish Academy of Engineering Sciences, 712K Boyd Research and Graduate Education Center, University of Georgia, 200 DW Brooks Drive, Athens, GA 30602, USA
Interests: asphalt mixtures; cement; concrete; 3D print; high-strength geopolymers; life cycle assessment
* Section "Building Materials, and Repair & Renovation"



Prof. Dr. Shi-Jie Cao Website
Associate Editor

1. School of Architecture, Southeast University, Nanjing 210096, China
2. Global Centre for Clean Air Research (GCARE), Department of Civil and Environmental Engineering, Faculty of Engineering and Physical Sciences, University of Surrey, Guildford GU2 7XH, UK
Interests: building environment and control; air quality and health; urban environment and design; fast prediction of built environment
* Section "Building Energy, Physics, Environment, and Systems"
Special Issues, Collections and Topics in MDPI Journals



Prof. Dr. Derek Clements-Croome Website
Associate Editor

School of the Built Environment, Whiteknights, University of Reading, P.O. Box 219, Reading RG6 6AW, UK
Interests: health and wellbeing; design and management of intelligent buildings; sustainable liveable buildings; environmental sensory design; creating productive and creative workplaces
* Section "Architectural Design, Urban Science, and Real Estate"
Special Issues, Collections and Topics in MDPI Journals



Prof. Dr. Lucio Solbeman Website
Associate Editor

Department of Civil and Environmental Engineering, Civil and Environmental Engineering and Spatial Sciences Institute, University of Southern California, Los Angeles, CA, USA
Interests: use of information technology for economic development; information technology support for construction management; process integration during the development of large-scale engineering systems; information logistics; artificial intelligence; data mining; knowledge discovery; image reasoning; text mining; machine learning; advanced infrastructure systems; sensors; streaming data; multi-reasoning mechanisms
* Section "Construction Management, and Computers & Digitization"



Prof. Dr. Humberto Varum Website
Associate Editor

CONSTRUCT-LESE, Faculty of Engineering, University of Porto, 4200-465 Porto, Portugal
Interests: assessment, strengthening and repair of structures; structural health monitoring; structural testing and modeling; earthquake engineering; earth construction rehabilitation and seismic strengthening
* Section "Building Structures"
Special Issues, Collections and Topics in MDPI Journals



Dr. Henry Abanda Website
Editorial Board Member

Oxford Institute for Sustainable Development, School of the Built Environment, Faculty of Technology, Design & Environment, Oxford Brookes University, Oxford, UK
Interests: BIM; building rehabilitation; sustainable construction
Special Issues, Collections and Topics in MDPI Journals



Prof. Dr. Jamal A. Abdalla Website
Editorial Board Member

School of Engineering, American University of Sharjah, Sharjah, United Arab Emirates
Interests: strengthening and retrofitting of structures; sustainable construction materials; computing in civil engineering and earthquake engineering
Special Issues, Collections and Topics in MDPI Journals



Prof. Dr. Osama Abudayyeh Website
Editorial Board Member

Civil and Construction Engineering in the College of Engineering and Applied Sciences, Western Michigan University, Kalamazoo, MI 49008, USA
Interests: asset management; innovative project delivery and contracting strategies; smart buildings; safety management; infrastructure management and health monitoring; non-destructive testing and evaluation; modeling and analysis of engineering data; project control concepts and systems
Special Issues, Collections and Topics in MDPI Journals



Prof. Dr. Emin Apıkkalp Website
Editorial Board Member

Department of Mechanical Engineering, Engineering Faculty, Eskişehir Technical University, Eskişehir 26470, Turkey
Interests: energy; sustainability; thermodynamics; exergy; sustainable energy in buildings



Dr. Mizan Ahmed Website
Editorial Board Member

School of Civil and Mechanical Engineering, Curtin University, Perth, WA 6102, Australia
Interests: steel structures; concrete structures; steel-concrete composite structures; computational mechanics; structural dynamics
Special Issues, Collections and Topics in MDPI Journals



Dr. Anuoluwapo Ajayi Website
Editorial Board Member

Big Data Enterprise and Artificial Intelligence Laboratory, University of the West of England, Bristol, UK
Interests: energy analytics; safety management; sustainable construction; construction informatics; artificial intelligence



Dr. Ali Akbar Nezhad Website
Editorial Board Member

School of Civil and Environmental Engineering, University of New South Wales (UNSW Sydney), Sydney, NSW 2052, Australia
Interests: sustainable construction materials; construction management; automation in construction; digital engineering in construction; risk management and decision making
Special Issues, Collections and Topics in MDPI Journals



Dr. Reza Akhavan Website
Editorial Board Member

Department of Civil, Construction, and Environmental Engineering, San Diego State University, San Diego, CA 92182, USA
Interests: construction robotics; artificial intelligence (AI); Internet of Things (IoT); data analytics; machine learning; cyber-physical systems; building information modeling (BIM); construction automation; digital transformation; digital twins
Special Issues, Collections and Topics in MDPI Journals



Prof. Dr. Khair Al-Kodmany Website
Editorial Board Member

Department of Urban Planning and Policy, College of Urban Planning and Public Affairs, University of Illinois at Chicago, Chicago, IL 60607, USA
Interests: tall buildings; ecological design; biomimicry; intelligent systems; smart skins; renewable energy; wood skyscraper; retrofitting skyscrapers; vertical farms; green roofs; security systems; ultra-high speed and regenerative

IMPACT
FACTOR
3.8CITESCORE
3.1

**Dr. Karam M. Al-Obaidi** Website*Editorial Board Member*

Department of the Natural and Built Environment, College of Social Sciences and Arts, Sheffield Hallam University, Sheffield, UK

Interests: building performance; building simulation; energy efficiency; environmental and biometric architecture; indoor environmental quality; sustainable building technologies; solar energy; smart buildings and cities
Special Issues, Collections and Topics in MDPI journals

**Dr. Md Morshed Alam** Website*Editorial Board Member*

Swinburne University of Technology, Hawthorn, VIC 3122 Australia.

Interests: digital construction; building information modelling; digital twin; construction management; building materials; building design and retrofit; energy rating; building performance and simulation; life cycle assessment; sustainable construction; sustainable building technology; life cycle cost analysis
Special Issues, Collections and Topics in MDPI journals

**Dr. Ricardo M. S. F. Almeida** Website*Editorial Board Member*

1. CONSTRUCT-LFC, Faculty of Engineering (FEUP), University of Porto, Porto, Portugal, Rua Dr. Roberto Frias s/n, 4200-465 Porto, Portugal
2. Polytechnic Institute of Viseu, School of Technology and Management, Department of Civil Engineering, Campus Politécnico de Repeses, 3504-510 Viseu, Portugal

Interests: natural ventilation and airlihtness; energy efficiency; thermal comfort; indoor environmental quality; infrared thermography and in situ testing of buildings or building components; heat, air and moisture transfer in buildings or building components; building simulation; multi-objective optimization
Special Issues, Collections and Topics in MDPI journals

**Dr. Jingjing An** Website*Editorial Board Member*

School of Environment and Energy Engineering, Beijing University of Civil Engineering and Architecture, Beijing, China

Interests: analysis and mining of building related data including energy consumption; environmental parameters; occupant behavior; envelope thermal properties; optimal control of HVAC systems

Prof. Dr. Yonghui An Website*Editorial Board Member*

1. Department of Civil Engineering, Dalian University of Technology, Dalian 116023, China

2. School of Civil Engineering and Architecture, Guangxi University, Nanning 530004, China

Interests: structural health monitoring; structural vibration mitigation; smart structures; composite structures

**Prof. Dr. Bassem O. Andrawes** Website*Editorial Board Member*

Department of Civil and Environmental Engineering, University of Illinois at Urbana-Champaign, 205 N. Mathews, Urbana, IL 61801, USA

Interests: earthquake engineering; reinforced and prestressed concrete structures; smart and advanced materials; structural application of shape memory alloys (SMAs); experimental testing; advanced numerical

**Dr. Julieta Maria Pires António** Website*Editorial Board Member*

Department of Civil Engineering, University of Coimbra, Coimbra, Portugal

Interests: building acoustics; sustainable building materials; materials characterization; numerical simulation of wave propagation

**Prof. Dr. Jurgita Antucheviciene** Website*Editorial Board Member*

Department of Construction Management and Real Estate, Vilnius Gediminas Technical University, LT-10223 Vilnius, Lithuania

Interests: civil engineering; multiple-criteria decision making; multiple-criteria optimization in construction technology and management; sustainability
Special Issues, Collections and Topics in MDPI journals

**Prof. Dr. Alessandra Aprile** Website*Editorial Board Member*

Department of Engineering, University of Ferrara, Ferrara, Italy

Interests: earthquake engineering; environmental damage of RC bridges; fatigue damage of aluminum truss structures; seismic assessment of existing and historical structures; seismic retrofit with passive control techniques, including base isolation; friction and viscoelastic dissipation; strengthening of RC and masonry structures with advanced materials and techniques; sustainable retrofit techniques; ductility reduction factor assessment for RC frame-wall structures; risk analysis and risk mitigation at urban scale
Special Issues, Collections and Topics in MDPI journals

**Prof. Dr. Müslüm Anıcı** Website*Editorial Board Member*

Mechanical Engineering Department, Engineering Faculty, Kocaeli University, Umuttepe Campus, Kocaeli 41001, Turkey

Interests: buildings; energy efficiency; thermal energy storage; thermal management; CFD; phase change materials; renewable energy
Special Issues, Collections and Topics in MDPI journals

**Prof. Dr. Fabrizio Ascione** Website*Editorial Board Member*

Department of Industrial Engineering, University of Naples Federico II, 80138 Napoli NA, Italy

Interests: energy efficiency in buildings; heat transfer; HVAC systems; thermal envelope; renewable technologies at the building scale; net zero-energy buildings
Special Issues, Collections and Topics in MDPI journals

Dr. Francesco Ascione Website*Editorial Board Member*

Department of Civil Engineering, University of Salerno, 84084 Fisciano, Italy

Interests: multiscale modeling; buckling; connection technologies for fiber composite materials; strengthening of concrete structures by FRP, SRP and FRCM; coatings; high performance fiber reinforced concrete; sustainability
Special Issues, Collections and Topics in MDPI journals

**Prof. Dr. Francesco Asdrubali** Website*Editorial Board Member*

Department of Industrial, Electronic and Mechanical Engineering, Roma Tre University, Via Vito Volterra, 62, 00146 Roma, Italy

Interests: green buildings; energy efficiency; NZEB; building performance; building materials; building acoustics; life cycle assessment; embodied energy; embodied carbon; renewable energy systems
Special Issues, Collections and Topics in MDPI journals

**Dr. Mahmud Ashraf** Website*Editorial Board Member*

School of Engineering, Deakin University, Geelong, Australia

Interests: timber and bamboo structures; steel and stainless steel structures; hybrid structures; modelling of materials and structures; sustainable construction and structures; 3D printed structures

**Prof. Dr. Panagiotis G. Asteris** Website*Editorial Board Member*

Department of Civil Engineering, School of Pedagogical & Technological Education, Athens, Greece

Interests: structural engineering; earthquake engineering; masonry structures; historical & monumental structures
Special Issues, Collections and Topics in MDPI journals

Displaying Editorial board member 1-30 on page 1 of 26.

Go to page 1 2 3 4 5 > >>

Further Information

[Article Processing Charges](#)
[Pay an Invoice](#)
[Open Access Policy](#)
[Contact MDPI](#)
[Jobs at MDPI](#)

Guidelines

[For Authors](#)
[For Reviewers](#)
[For Editors](#)
[For Librarians](#)
[For Publishers](#)
[For Societies](#)
[For Conference Organizers](#)

MDPI Initiatives

[Sciforum](#)
[MDPI Books](#)
[Preprints.org](#)
[Scilit](#)
[SciProfiles](#)
[Encyclopedia](#)
[JAMS](#)
[Proceedings Series](#)

Follow MDPI

[LinkedIn](#)
[Facebook](#)
[Twitter](#)



Source details

Buildings

Open Access ⓘ

Scopus coverage years: from 2011 to 2023

Publisher: Multidisciplinary Digital Publishing Institute (MDPI)

E-ISSN: 2075-5309

Subject area: Engineering: Architecture Engineering: Building and Construction Engineering: Civil and Structural Engineering

Source type: Journal

[View all documents >](#) [Set document alert](#) Save to source list Locate full-text(opens in a new window)

CiteScore 2022
3.1 ⓘ

SJR 2022
0.605 ⓘ

SNIP 2022
1.343 ⓘ

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

Improved CiteScore methodology

CiteScore 2022 counts the citations received in 2019-2022 to articles, reviews, conference papers, book chapters and data papers published in 2019-2022, and divides this by the number of publications published in 2019-2022. [Learn more >](#)

CiteScore 2022 ▾

3.1 = $\frac{10,404 \text{ Citations 2019 - 2022}}{3,380 \text{ Documents 2019 - 2022}}$

Calculated on 05 May, 2023

CiteScoreTracker 2023 ⓘ

3.3 = $\frac{19,212 \text{ Citations to date}}{5,809 \text{ Documents to date}}$

Last updated on 05 December, 2023 • Updated monthly

CiteScore rank 2022 ⓘ

Category	Rank	Percentile
Engineering Architecture	#28/170	83rd
Engineering Building and Construction	#86/200	57th
Engineering Civil and Structural	#171/350	51st

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site ↗](#)

Andor Quantum Camera Solutions

Learn more about Andor's iXon Ultra EMCCD & iStar Intensified Cameras

AndorTechnology

Open

Buildings

COUNTRY	SUBJECT AREA AND CATEGORY	PUBLISHER	H-INDEX
Switzerland	Engineering Architecture Building and Construction Civil and Structural Engineering	Multidisciplinary Digital Publishing Institute (MDPI)	45
Universities and research institutions in Switzerland			
Media Ranking in Switzerland			
PUBLICATION TYPE	ISSN	COVERAGE	INFORMATION
Journals	20755309	2001, 2011-2022	Homepage How to publish in this journal buildings@mdpi.com

E-ICEBLUE

C# PDF Libræ

Open

Cambridge Open Access


Cambridge UniversityPress

Open

SCOPE

Buildings covers the following scope of research: -architecture- architectural/building engineering- design- building construction- construction management- building materials- energy and buildings- building operations- building physics- building structures- building mechanical systems- building lighting systems- green buildings- building/facility management- the philosophy, art and science of architecture designing- the linkages and interactions between the built environment and ecology, natural resources, climate, local communities, public policy, and economic development.

Join the conversation about this journal


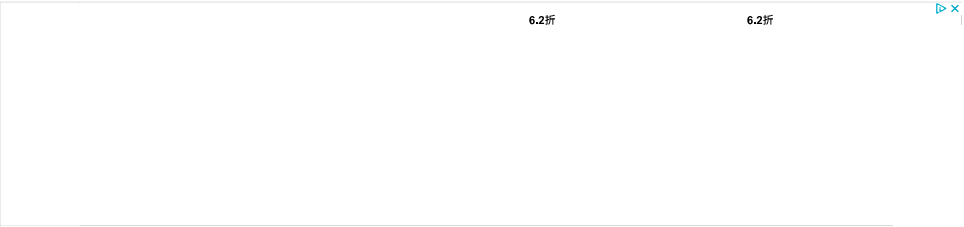


Quartiles

FIND SIMILAR JOURNALS

options

1 Journal of Architectural Engineering USA 78% similarity	2 Journal of Green Building USA 75% similarity	3 Journal of Building Engineering NLD 74% similarity	4 Architectural Science Review GBR 67% similarity	5 Intelligent Buildings International GBR 63% similarity
---	--	--	---	--

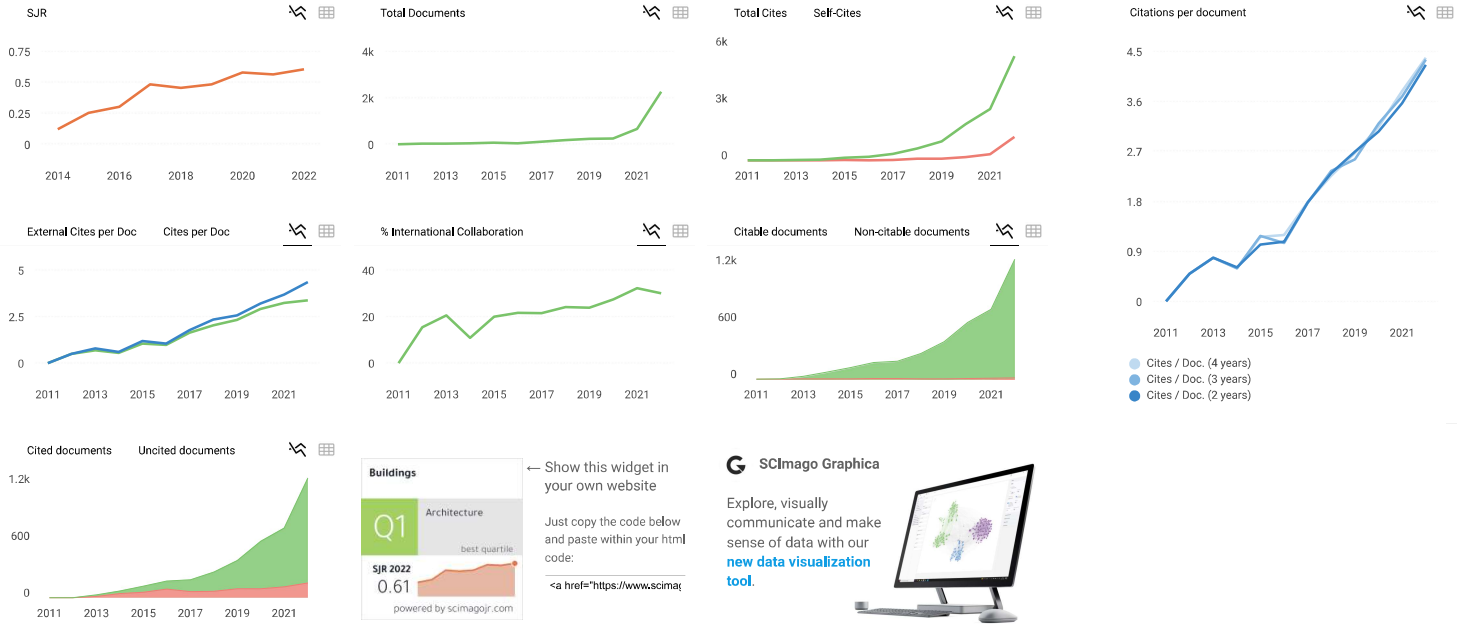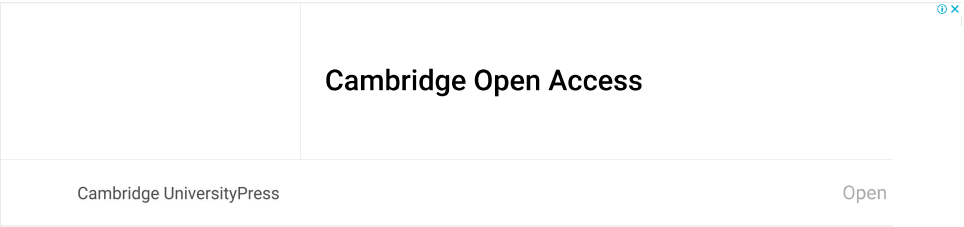

Article

Prototyping a Lighting Control System Using LabVIEW with Real-Time High Dynamic Range Images (HDRis) as the Luminance Sensor

Aris Budhiyanto *  and Yun-Shang Chiou

Department of Architecture, National Taiwan University of Science and Technology, Taipei 106, Taiwan;
ychiou@mail.ntust.edu.tw

* Correspondence: aris.budhiyanto@gmail.com; Tel.: +866-986341427

Abstract: Lighting control systems (LCSs) play important roles in maintaining visual comfort and energy savings in buildings. This paper presents a prototype LCS using LabVIEW with real-time high dynamic range images and a digital multiplex controller to brighten lamps sequentially to provide visual comfort. The prototype is applied to a scaled classroom model with three schemes involving different activities and needs: writing and reading, requiring a uniform luminance of approximately 100 cd/m², teaching using a whiteboard, requiring an illuminance of approximately 120 cd/m² for the whiteboard and 60 cd/m² for the desks, and drawing and art activities focused on the center of the room, requiring an illuminance of approximately 100 cd/m² for the center area and 50 cd/m² for the background area. For each scheme, two conditions are presented: one in which the room is treated as a closed room without windows, and the one in which the room has a large window on one wall that enables daylight to penetrate the room. The prototype works well with both schemes and provides different combinations of lamp brightness levels, starting from 10% to 60%, based on the activities and required luminance, and can save around 73–82% of electricity. The presence of daylight does not always result in more energy savings, as the brightness contrast for visual comfort needs to be considered.

Keywords: lighting design; lighting control system; visual comfort; HDRi luminance analysis; LabVIEW; energy saving



Citation: Budhiyanto, A.; Chiou, Y.-S. Prototyping a Lighting Control System Using LabVIEW with Real-Time High Dynamic Range Images (HDRis) as the Luminance Sensor. *Buildings* **2022**, *12*, 650. <https://doi.org/10.3390/buildings12050650>

Academic Editor: Alessandro Cannavale

Received: 25 April 2022

Accepted: 9 May 2022

Published: 13 May 2022

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Lighting is an essential factor for indoor environmental quality since it is related to occupants' visual comfort. In terms of building energy consumption, approximately 30% is dedicated to lighting. Therefore, it is important to find a way to reduce energy consumption without sacrificing occupants' visual comfort [1]. To achieve that purpose, lighting control systems (LCSs) are implemented in buildings. Implementing an LCS not only provides visual comfort for the occupants, but also reduces energy consumption by 60% [2].

The LCS receives information from the sensors, which is then processed by control rules and algorithms to determine the actions of the lighting fixtures. Based on the sensors, there are three lighting control schemes commonly used in buildings: occupancy-based sensors, daylight-linked systems, and scheduling schemes. Occupancy-based sensors depend on movement detection using passive infrared (PIR) sensors, ultrasonic sensors, or radio frequency identification (RFID), while daylight availability (illuminance) measured by a photosensor is used in the daylight-linked system, and a fixed schedule is used to control the lights in the scheduling system [3]. LCSs may use several types of sensors to achieve optimal results. An intelligent LCS research has developed a combination of lux sensors to monitor light intensity and motion sensors to sense human presence connected with LabVIEW (Laboratory Virtual Instrument Engineering Workbench) programming to control light intensity [4]. Based on the actions of the lights, there are two light-control methods:

switching and dimming methods. In the switching method, lights can be controlled to switch on or off, while in dimming, the system reduces or increases the light level and dims the lights.

There have been many studies on LCSs. Table 1 presents selected related research and techniques.

Table 1. Selected research and their techniques of LCSs.

Ref.	Objectives	Detection/Measurement		Method
		Tools/ Sensor	Unit	
[5]	Energy saving by applying daylight harvesting systems and lighting control	Daylight sensor	Illuminance (lux)	Simulation using DYSIM software based on the close loop control algorithm
[6]	Minimizing energy consumption	Occupancy sensor, ambient lux sensor, and scheduling	Illuminance (lux)	ZigBee protocol and illumination control rules
[7]	Providing visual comfort and energy saving for different uses and room layouts	Daylight sensor and user control	Illuminance (lux)	Home automation system
[8]	Adjusting lighting brightness, CCT, and illuminance distribution to meet various needs	Occupancy sensor, ambient lux sensor, scheduling, and user control	Illuminance (lux) and correlated color temperature (K)	IoT (Internet of Things) gateways and cloud platform
[9]	Providing illumination levels based on the users' needs and routines	PIR sensor, lux sensor, scheduling	Illuminance (lux)	Simulation using Dialux Evo software based on Fuzzy Logic and Artificial Neural Network
[10]	Proposing a control system for shop window lighting	Digital camera to produce HDRi	Luminance (cd/m^2)	DMX controller based on rules and algorithm
[11]	Developing a lighting system integrating users in the control loop	lux sensor, user survey	Illuminance (lux) and users' response	Q-learning algorithm
[12]	Comparing independent and integrated control strategies based on energy saving and lighting performance	Occupancy sensor, ambient lux sensor, and scheduling	Illuminance (lux)	Co-simulation platform consisting of BCVTB, EnergyPlus, and MATLAB

Illuminance sensors are common sensors used in LCSs [5–9,11,12], and working plane illuminance is mostly used to indicate lighting quantity because it is easily measured. However, as placing the illuminance sensor on the working plane is not practical, most illuminance sensors are mounted on walls or ceilings instead of the working plane, which can affect their performance [3]. In addition to illuminance, luminance also needs to be taken into consideration for providing visual comfort [13], as it is related to the light received by the human eye and human visual perception of brightness [14]. Luminance distribution can be measured by a spot luminance meter, but it is not effective to measure individual spots continuously. Current technology uses digital cameras to measure the luminance of a scene, called the high dynamic range (HDR), which captures luminance ranges within a scene and calculates the luminance based on pixel values [10,14]. The digital camera offers advantages over the light sensor in that the digital camera can be mounted on walls or ceilings without affecting the quality and performance of the HDRi. The method of using a digital camera as a luminance meter using high-dynamic-range images (HDRis) has been used for shop window LCSs to maintain a constant contrast between the shop window interior and its surroundings. The control system varies the brightness level of the lamps based on the level of exterior light to maintain this contrast [10].

Common LCSs are programmed to brighten or dim lamps simultaneously based on illuminance or occupancy detection [9,11,12]. However, this method mostly provides a uniform brightness, and for some activities that require brightness contrast, brightening or dimming lamps simultaneously is not able to achieve the desired brightness contrast, resulting in visual discomfort. In comparison, the occupancy detection sensor usually

responds by turning on the lamps in a certain area where the occupants are detected and keeping the lamps in other areas turned off. This will lead to substantial brightness contrast in the room and cause visual discomfort [15,16]. In addition, the presence of daylight in the room should be considered in LCSs. Several LCSs are integrated with a blind/shade control system to block daylight. To fill this research gap, this study proposes an LCS based on HDRi for view sensing that uses dimmable LED lamps with various brightness levels as a solution. The lamps can be controlled to brighten in sequence in response to brightness contrast or daylight, so their brightness levels are varied.

The objective of this study is to develop a prototype of an LCS consisting of several dimmable LED lamps and a 360° internet protocol (IP) camera that serves as a viewing sensor for maintaining the visual comfort of the task area for various activities by brightening the lamps in sequence based on the activities and lighting needs. The 360° IP camera is used as a luminance sensor to produce HDRis and measure luminance. The LCS is developed based on HDRis for a room used for three activities, each requiring a different luminance. Different from the research conducted by [10], which focused only on the given contrast values of indoor and exterior environments without considering the various activities occurring there, this LCS is designed to provide visual comfort by maintaining the indoor luminance level at a given value and saving energy for both activities and needs.

Instead of using common programming languages, such as C++, Python, or MATLAB, which require advanced programming skills [5–12], the LabVIEW environment is used since it employs G programming, which can analyze several layers of data and execute according to the rules of data flow instead of a more traditional procedural approach. In addition, it enables parallel processing and performing multiple tasks at once, different from traditional and sequential languages such as C and C++ [17]. LabVIEW's biggest advantage is the rapid and simple construction of the graphical user interface (GUI), which makes it easier to create the algorithm and does not require advanced programming skills to operate [18]. Based on HDRi luminance values, LabVIEW sets the brightness levels of the LED lamp and communicates with a digital multiplex (DMX) controller to control and brighten the LED lamps. Each lamp is brightened in sequence to respond to the indoor luminance levels.

2. Materials and Methods

2.1. Model Prototype

The prototype of lighting control is composed of:

- 9 dimmable LED lamps with a dimmable DMX driver.
- 2 LED Fresnel lamps.
- An Arduino Uno as the DMX controller.
- A 360° IP camera.
- A luminance meter.
- A laptop installed with LabVIEW software.

The prototype is assumed to be a classroom environment that is used for three different types of activities: the first includes writing and reading (self-studying room), the second is teaching using a whiteboard (conventional classroom), and the last one is drawing and art activities focused on the center of the room (art activity classroom).

The prototype is set on a $1.5 \times 1.5 \text{ m}^2$ measurement area divided into 25 squares (X_1, Y_1 to X_5, Y_5) as the working plane, and a piece of paper is placed in each square. Nine LED lamps arranged in three rows (A, B, C) and three columns (1, 2, 3) are hung 70 cm above the floor, so the proportion of room depth:height is approximately 2.15:1. Compared to a real classroom, the prototype is scaled down by four times. The LED lamps are covered with papers to reduce the brightness to levels in line with the scale of the prototype. To ensure the brightness scales as intended, an LED lamp is adjusted to various brightness levels, and an illuminance meter is used to measure the illuminance of the working plane in the prototype and in the real classroom for comparison. The illuminance measurements of the working plane in both the prototype and the real classroom are approximately 160 lux,

260 lux, and 500 lux as the lamp is brightened to 30%, 50%, and 100%, respectively. On one side of the wall, three papers are placed at a height of 45 cm (two-thirds of room height) as the whiteboard (X_2, Y_6 to X_4, Y_6). A 360° IP camera and a luminance meter are installed at the center of the experimental area, and two LED Fresnel lamps are placed outside of the measurement area, but their light is directed toward the measurement area to provide additional light to be assumed as daylight when the measurement scheme with daylight is presented (Figure 1). The IP camera captures images of the scene, and an algorithm is used to create an HDRi. The luminance value of each piece of paper placed inside the 28 squares is obtained from the HDRi and calibrated using the luminance meter. Based on these luminance values, LabVIEW is programmed to determine the brightness level of each LED lamp, and an Arduino Uno, used as a DMX controller, controls the brightness levels of the lamps [19,20] (Figure 2).

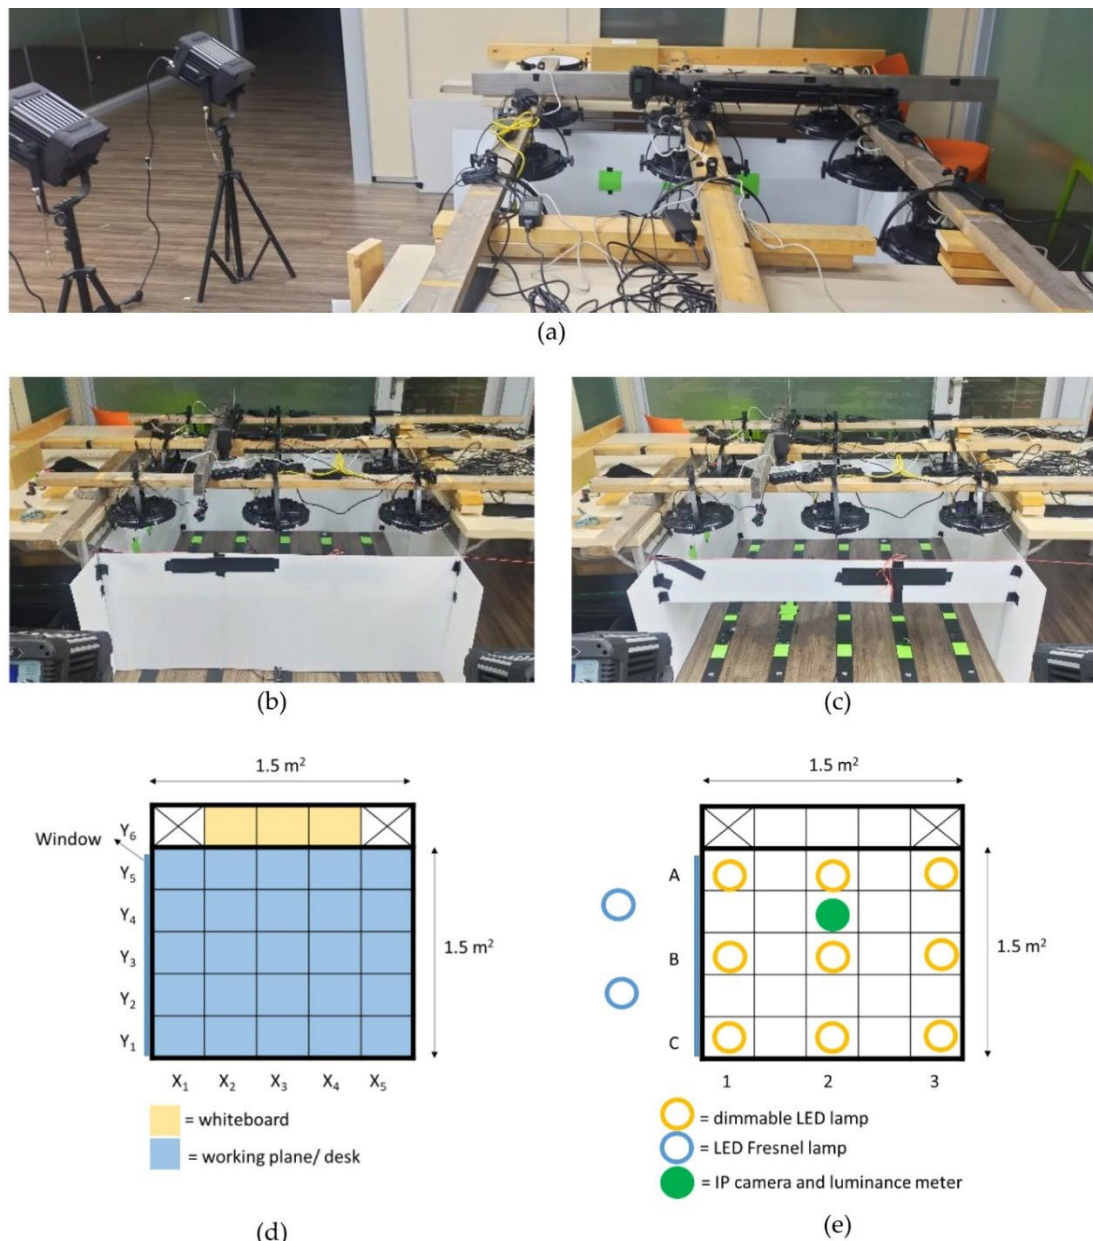


Figure 1. (a) The prototype is set on a $1.5 \times 1.5 \text{ m}^2$ area; (b) The model for the closed room without daylight scheme; (c) The model for the room with a window on one side and daylight is presented; (d) The layout of the prototype; (e) The arrangement of lamps.

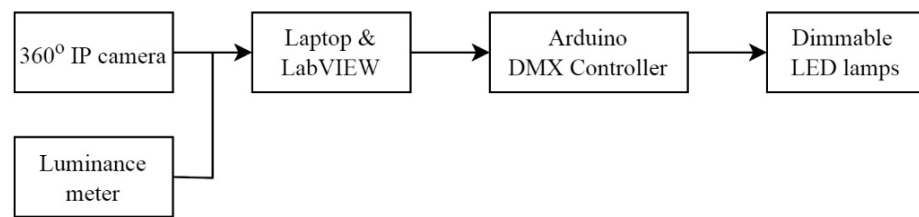


Figure 2. Control system framework.

2.2. HDRi Processing

The HDR technique has been widely accepted and applied for various purposes, such as digital photography, image editing, virtual reality, digital cinema and video, rendering, lighting simulation, and remote sensing [21]. In this study, an IP camera is used to measure the luminance of a scene using the HDR photography technique. The camera acquires images at multiple exposures to capture a wide luminance variation within a scene within one minute (Figure 3). The images are merged to create an HDRi based on the Debevec algorithm [10,22]. The luminance value is calculated based on the Radiance-based program using the following equation:

$$L = (0.265 \times R + 0.670 \times G + 0.065 \times B) \quad (1)$$

where L is the luminance value of the pixel (cd/m^2); R , G , and B are the spectrally weighted radiance values of the pixel ($\text{W}/\text{m}^2 \text{ sr}$), and 0.265, 0.670, and 0.065 are calculated from CIE chromaticity used by Radiance [23,24]. A luminance meter is used to calibrate the 360° IP camera luminance value to obtain the correct luminance results [25].

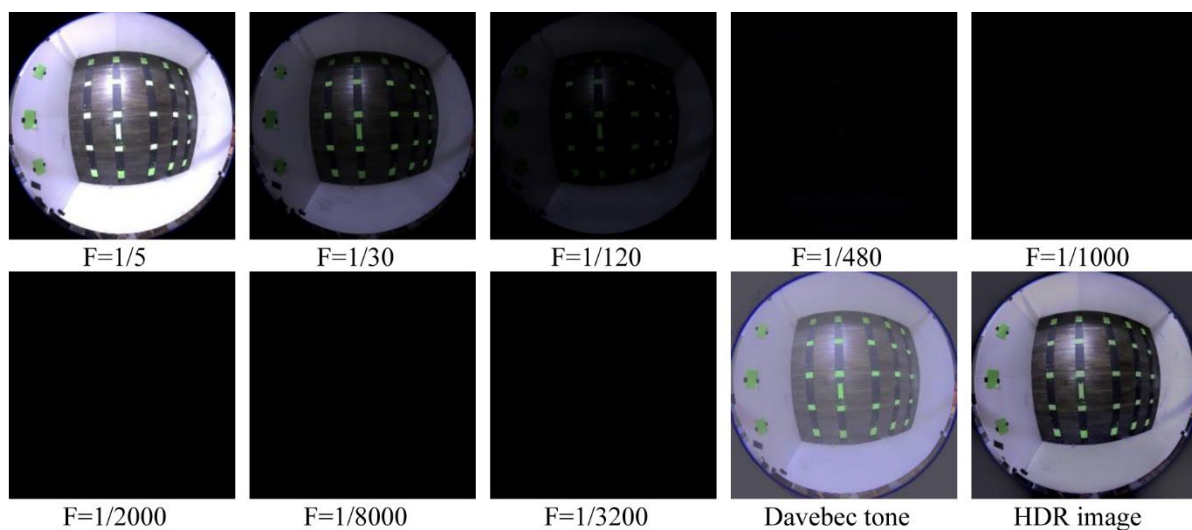


Figure 3. The images with different exposure and HDRi produced by 360° IP camera.

2.3. Calibration and Verification

2.3.1. Vignetting Effect and Correction of HDRi Luminance Results

The HDRi luminance measurement needs to be corrected because the light attenuation at the periphery of the lens results in luminance values for points away from the center of an HDRi image being systematically less than the actual luminance values in the scene. This is referred to as the vignetting effect, which is a nonlinear radial effect along the image radius of the lens and is often approximated by a polynomial function. To determine the vignetting effect, an HDRi of a uniform surface is captured, and the derived luminance values are compared to multiple spot measurements taken across the same surface [26,27]. Based on the vignetting effect, the vignetting correction factor with $R^2 = 0.98$ for each individual pixel is defined (Figure 4).

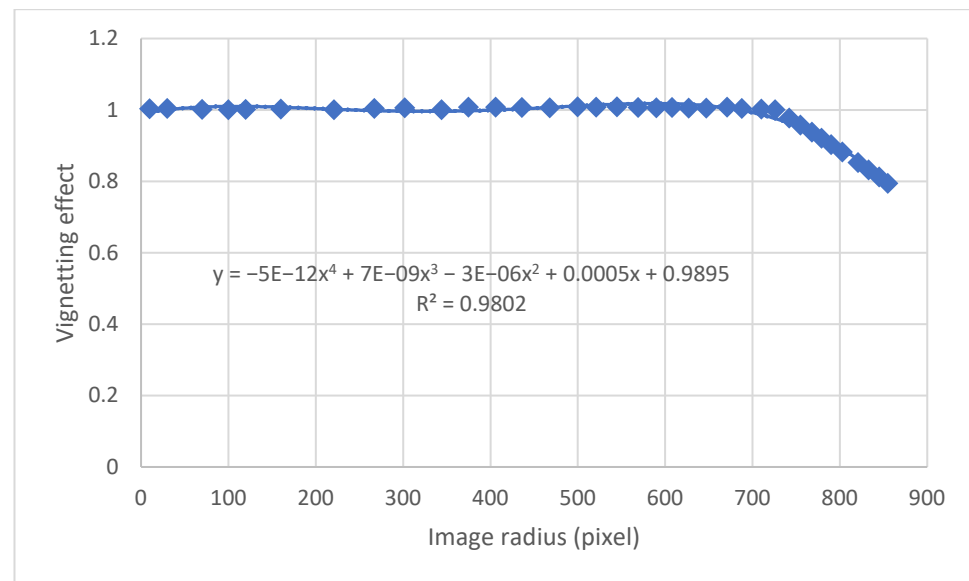


Figure 4. Measured luminance values and the vignetting function derived to fit the measured values.

To verify the HDRi luminance value results, multiple spot measurements using a luminance meter are acquired at various LED lamp brightness levels for comparison. Figure 5 shows the luminance values obtained from the HDRi and measurement. The lamp brightness levels for HDRi 1 and measurement 1, HDRi 2 and measurement 2, HDRi 3 and measurement 3, HDRi 4 and measurement 4, and HDRi 5 and measurement 5 are 10%, 20%, 40%, 60%, and 80%, respectively. The average difference between the HDRi result and the measurement is within the range of 5–15%, which is deemed acceptable for practical measurements [26].

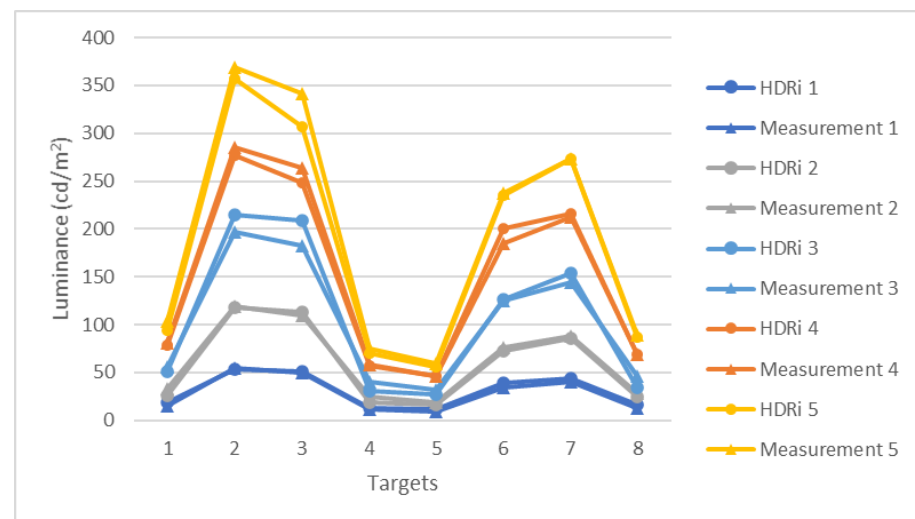


Figure 5. The luminance values obtained from the HDRis and measurements.

2.3.2. Luminance Requirement for Each Activity

Three activities are presented in this study: the first is writing and reading, which requires an illuminance level of approximately 500 lux for the entire room; the second is teaching using a whiteboard, which requires an illuminance level of approximately 600 lux on the whiteboard and approximately 300 lux on the desk area, with a brightness contrast level between the whiteboard and the desk area of approximately 1.5, and the last is drawing and art activities that focus on the center of the room, which require an illuminance level of approximately 500 lux on the center of the room and approximately 250 lux on

the background area, with a contrast level between the center and the background area of approximately 1.5 [28]. Since the HDRi produces luminance, the illuminance must be transformed to luminance. To obtain the required luminance value for each activity, measurements using an illuminance meter, luminance meter, and the sample paper used in the prototype and measurement area were conducted in different spaces of the classroom according to the activities. Table 2 shows the luminance values required for each activity.

Table 2. The luminance values required for each activity.

Activity	Measurement Area	Illuminance (Lux)	Luminance (cd/m ²)
Reading and writing	Working plan/desks	500	100
	Whiteboard	600	120
Teaching	Working plan/desks	300	60
	Center area	500	100
Drawing and art activity	Background area	250	50

2.3.3. Brightness Level and Energy Consumption of Dimmable LED Lamp

Since nine dimmable LED lamps are used in this prototype, the brightness level and energy consumption of each LED lamp needs to be calibrated and verified so that all the lamps have the same performance. During that process, each lamp is turned on with various brightness levels, from 10% to 100%, and an energy meter is used to measure the energy consumption of the lamp at various brightness levels. Table 3 shows the energy consumption of an LED lamp in various brightness levels. The difference between the measured energy consumption and the product information is around 0.33–11.67%.

Table 3. The energy consumption of an LED lamp in various brightness levels.

Brightness Level (%)	Measured Energy Consumption (W)	Product Information Output Power (W)	Difference (%)
10	6.7	6	11.67
20	12.3	12	2.5
30	18.6	18	3.33
40	23.9	24	0.42
50	29.9	30	0.33
60	36.7	36	1.94
70	41.9	42	0.24
80	48.4	48	0.83
90	56	54	3.7
100	62	60	3.33

2.4. Measurement Schemes

Based on the three different activities mentioned in Section 2.1, three measurement schemes with different LCSs are presented. Each scheme is applied for two conditions: the first is the room assumed as a closed room without windows, and the second is the room assumed to have a large window. The LED Fresnel lamps placed outside the measurement area are turned on, and it is assumed that daylight penetrates the room. The control system algorithm is built in the LabVIEW environment. LabVIEW is a visual programming language developed by National Instruments and used for measuring, monitoring, controlling, and recording operating conditions [18,29–31]. LabVIEW supports thousands of hardware devices, including Arduino, and has been implemented in smart building control to control lighting electricity, shading devices, and home safety [32–34]. In LabVIEW, the brightness levels of each lamp are set by responding to the luminance values.

2.4.1. Measurement Scheme 1

In Measurement Scheme 1, the room functions as a self-studying room for writing and reading activities, which requires a uniform luminance value of approximately 100 cd/m^2 for the entire room. The whiteboard is not considered in this scheme. In Measurement Scheme 1A, the room is assumed to be a closed room without windows, and in Measurement Scheme 1B, the room is assumed to have a large window on one side such that daylight penetrates through the window. In Measurement Scheme 1B, the LED Fresnel lamps outside the measurement area are dimmed to 50% so that the luminance values in the measurement area do not exceed the requirement and shading devices do not need to be used. Figure 6 shows the LCS for Measurement Scheme 1. First, the room is divided into two areas, and the average luminance values of each area are compared to detect whether daylight is present. If the average luminance values of one area are much higher than those of the other, the lamps in the other area are brightened by 10% in sequence until the average luminance values of both areas are close to equal. Then, if the luminance values of the entire room are less than 100 cd/m^2 , the lamps in columns 1 and 3 are simultaneously brightened by 10%, followed by the lamps in column 2 (L_1, L_3-L_2). This order is used instead of the order from column 1 to column 3 ($L_1-L_2-L_3$) because the latter order leads to all the lamps brightening to the same brightness level to meet the required luminance values, which has an effect no different from brightening all the lamps simultaneously (Appendix A). In addition, when the lamps placed on the rear sides brighten, they also illuminate the area in the center of the room. The measurement is repeated every three minutes per iteration because over one minute, the IP camera creates a series of images, and the lamp brightness levels should not change; otherwise, the created HDRis will not be accurate. Therefore, at least one additional minute after a change in lamp brightness levels is needed to create the next series of images.

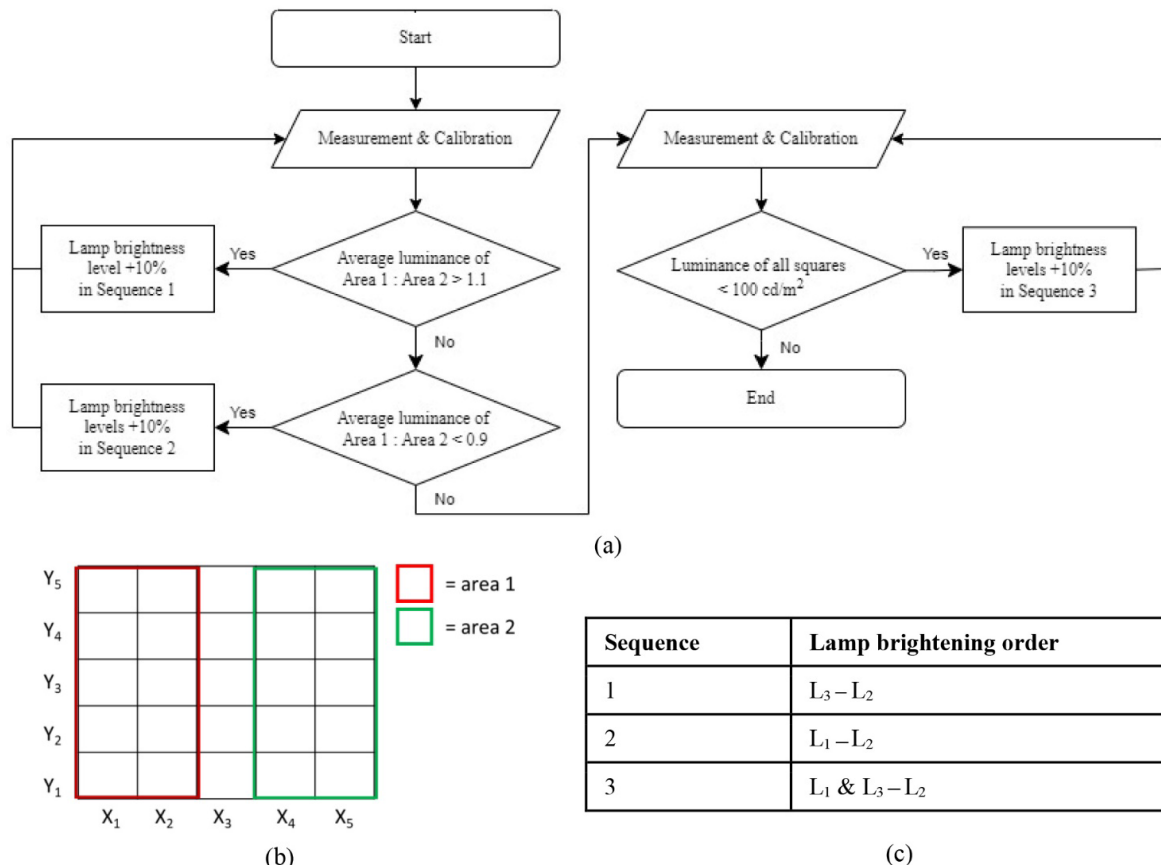


Figure 6. (a) The LCS flow diagram for scheme 1; (b) The layout of the room; (c) The sequence of the lamps brightened.

2.4.2. Measurement Scheme 2

Measurement Scheme 2 considers the room to function as a conventional classroom for teaching using a whiteboard, which requires a luminance value of approximately 120 cd/m^2 on the whiteboard (area A) and 60 cd/m^2 on the working plane/desks (area B); the brightness contrast between the whiteboard and the working plane should not be less than 1.5. This contrast value means that the average luminance values of whiteboards should be 50% higher than the average luminance value of the working plane/desks. Regarding the measurement accuracy of 5–15%, this value is more than three times higher than the error; thus, it can guarantee that the result of this measurement is correct. In Measurement Scheme 2A, the room is assumed to be a closed room without windows, and in Measurement Scheme 2B, the room is assumed to have a large window on one side so that daylight penetrates through the window. The LCS for Measurement Scheme 2 is presented in Figure 7. The first step of the LCS is similar to the LCS for Measurement Scheme 1, which is detecting whether there is daylight and making the luminance almost equal for both sides. If the luminance values of area A are less than 120 cd/m^2 , the brightness levels of the lamps in row A (L_A) will increase by 10%. After the luminance values of area A meet the requirement, the luminance values of area B are examined. If the luminance values are less than 60 cd/m^2 , the lamps in row C are brightened by 10%, followed by the lamps in row B (L_C – L_B). The L_C lamps are brightened first because the areas of rows Y_3 to Y_5 are already bright, resulting in the L_A brightness meeting the requirement for area A. The last step is calculating the contrast between area A and area B' (area B without row Y_5). If the ratio of the average luminance values of area A to those of area B' is less than 1.5, the L_A is brightened by 10%. To calculate the contrast, row Y_5 is not considered because in the classroom, the area in front of the whiteboard is not used as a working plane, and the desks are placed at a certain distance from the whiteboard.

2.4.3. Measurement Scheme 3

The art activity classroom is presented in Measurement Scheme 3. In this scheme, the drawing and art activities are focused on the center of the room (area A), which requires a luminance value of approximately 100 cd/m^2 ; the required luminance value on the background area (area B) is approximately 50 cd/m^2 ; the brightness contrast between the center of the room, where the art pieces are placed (area A' / X_3, Y_3), and area B should not be less than 1.5. The whiteboard is not considered in this scheme. A closed room without windows is used in Measurement Scheme 3A, and a room with a large window on one side and daylight penetrating through the window is used in Measurement Scheme 3B. Figure 8 shows the LCS for Measurement Scheme 3. Similar to Measurement Schemes 1 and 2, the first step of the LCS is similar to the LCS for Measurement Scheme 1, the presence of daylight is detected, and the luminance value is made almost equal for both sides. Then, if the luminance values of area A are less than 100 cd/m^2 , the lamps are brightened by 10%, with the lamp in the center of the room (L_{2B}) brightened first, followed by the four lamps L_{2C} , L_{2A} , L_{1B} , and L_{3B} simultaneously in the next iteration. Once the luminance values of area A meet the requirement, the luminance values of area B are examined. If the luminance values are less than 50 cd/m^2 , the remaining lamps L_{1A} , L_{1C} , L_{3A} , and L_{3C} are brightened by 10% simultaneously. After all the required luminance values are met, the contrast between area A' and area B is calculated. If the ratio of the average luminance values of area A' to those of area B is less than 1.5, the lamp L_{2B} is brightened by 10%.

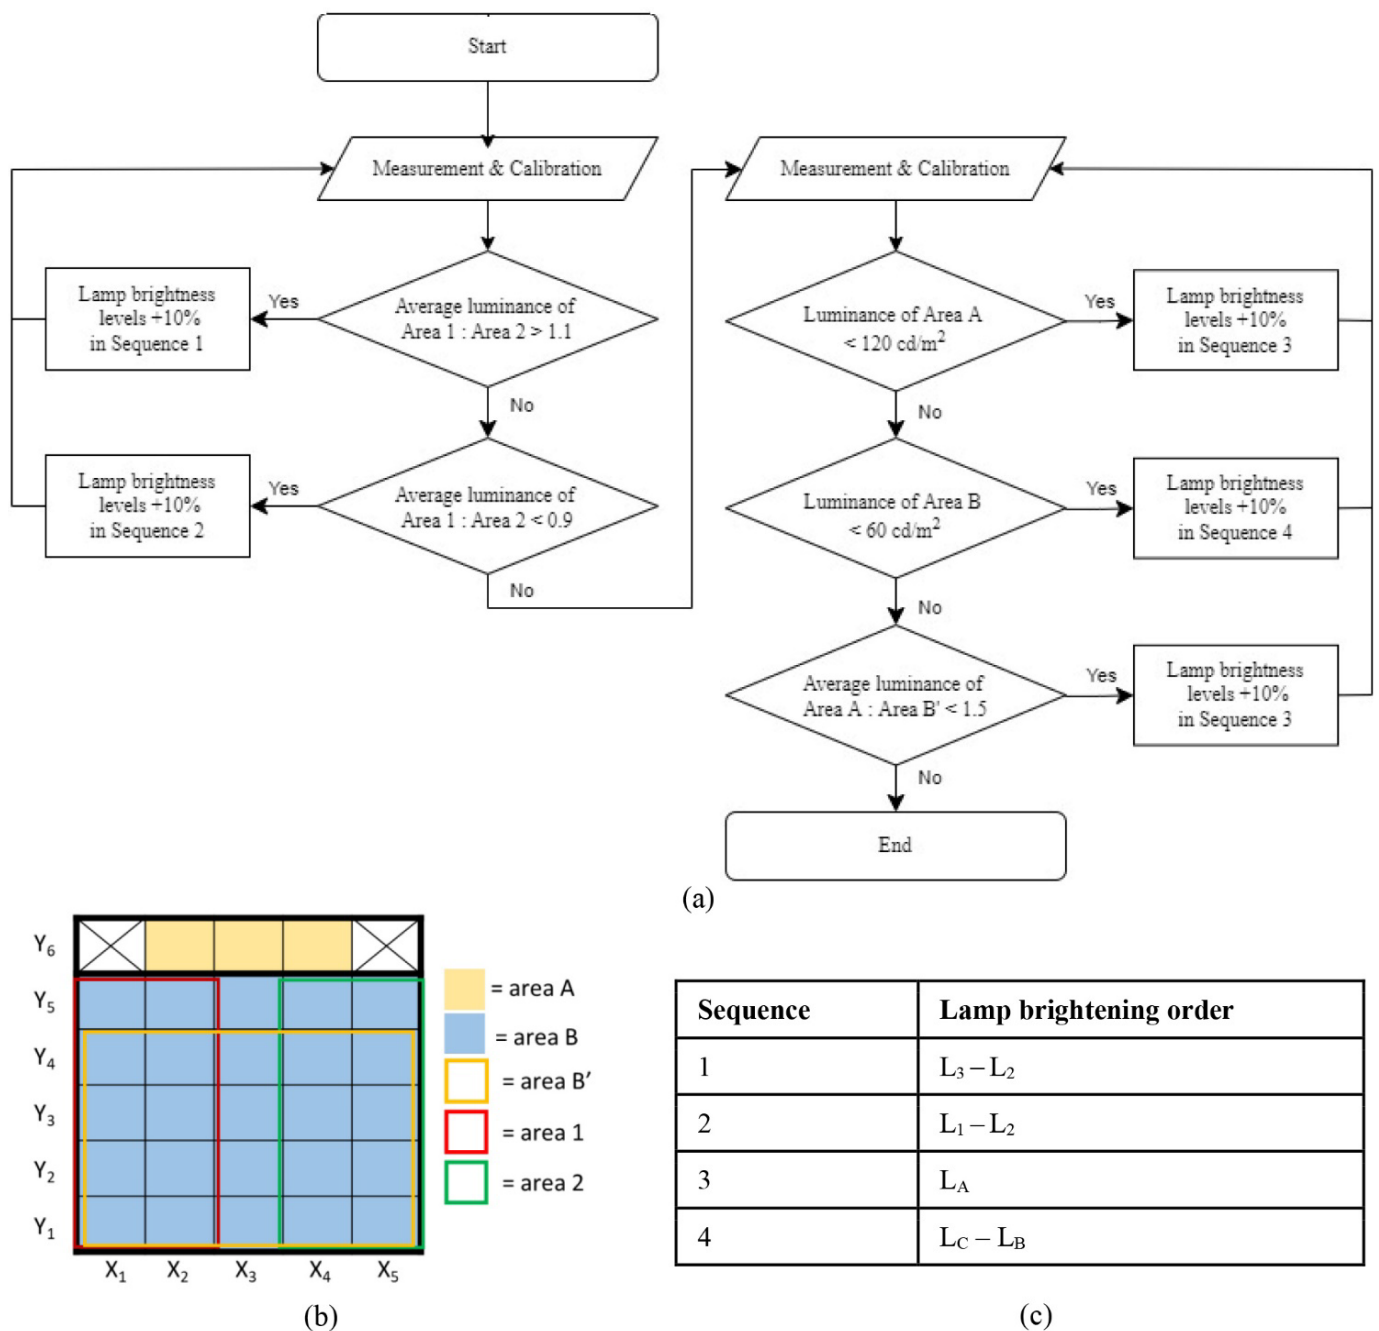


Figure 7. (a) The LCS flow diagram for scheme 2; (b) The layout of the room; (c) The sequence of the lamps brightened.

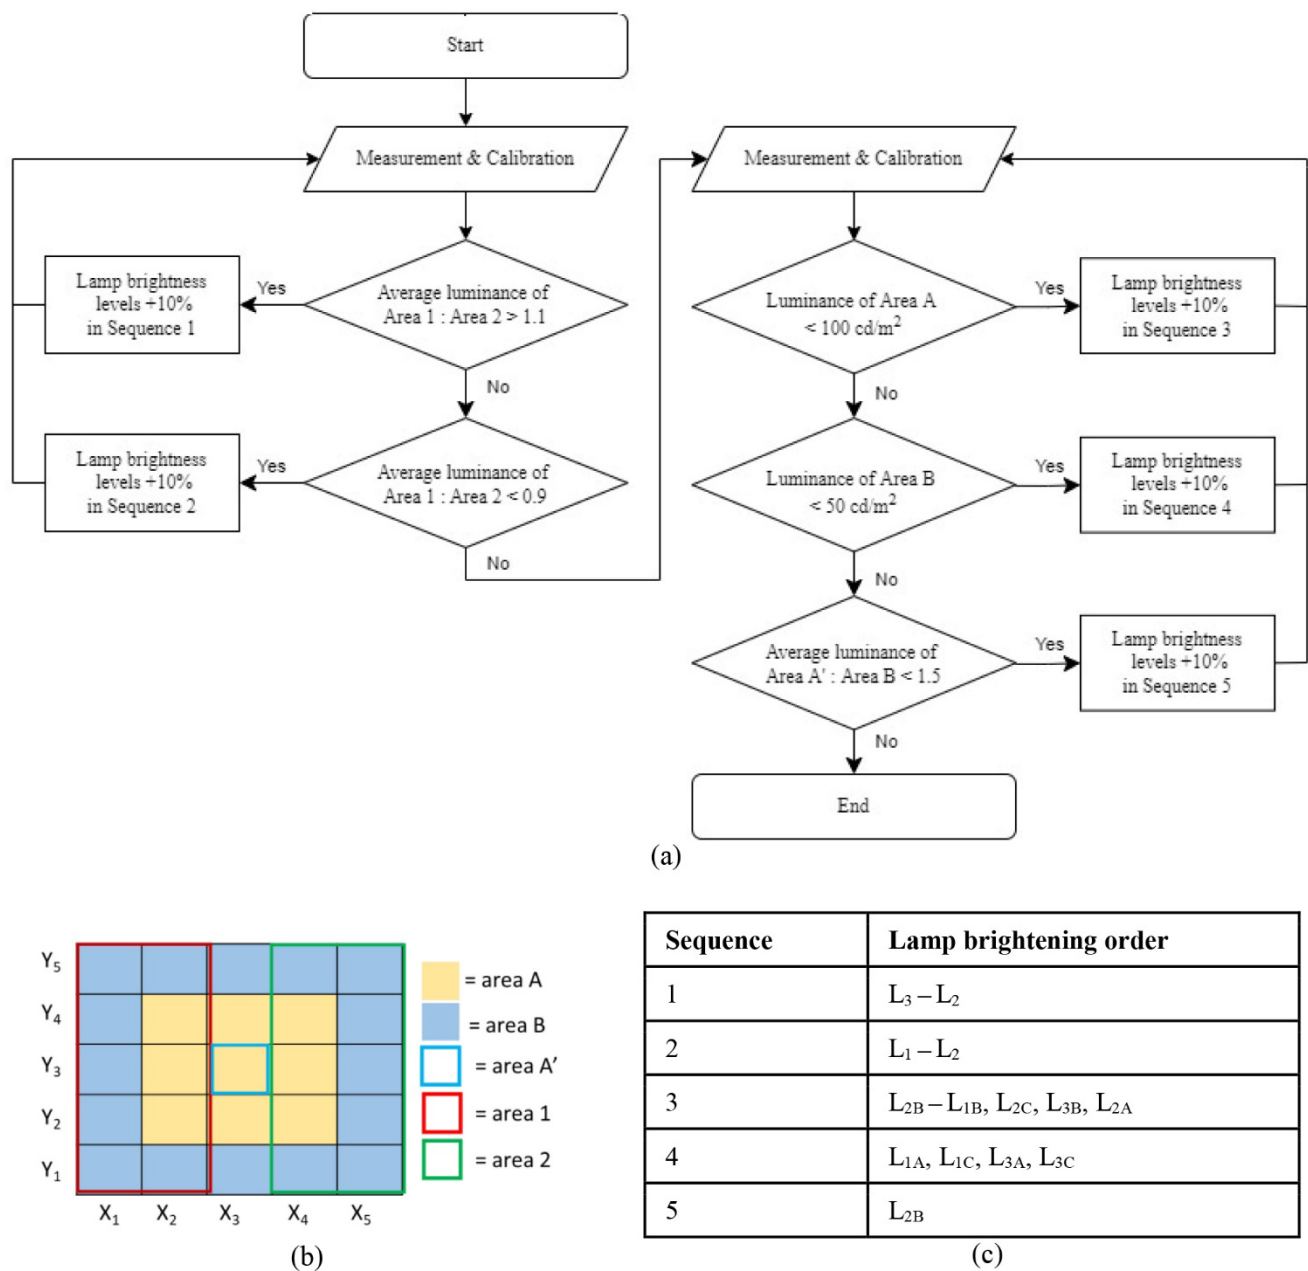


Figure 8. (a) The LCS flow diagram for scheme 3; (b) The layout of the room; (c) The sequence of the lamps brightened.

3. Results and Discussion

3.1. Luminance Values and Lamp Brightness Levels

In this section, the luminance values of the squares and the brightness levels of the LED lamps are presented and analyzed according to the results of the measurements.

3.1.1. Measurement Scheme 1A

In Measurement Scheme 1A, the room is assumed to be a closed self-studying room without windows. The initial condition shows that there is no difference between the luminance values of area 1 and area 2; thus, the lamps brightened by 10% in sequence 3. This sequence brightens the lamps in columns 1 and 3 (L_1 and L_3) simultaneously, followed by the lamps in column 2 (L_2) during the ensuing iterations. The required luminance values of all squares greater than 100 cd/m^2 are met after five iterations, with lamps in L_1 and L_3 at 30% brightness and L_2 at 20% brightness (Figure 9). After iteration 5, the brightness

levels of the lamps remain steady and no longer change. This result shows that it is not necessary to brighten all lamps to the same level to provide uniform luminance values: some lamps can be brightened at a lower level depending on their positions. In this case, the lamps in L_2 , in the middle column of the room, need to be brightened to only 20% because the lamps in L_1 and L_3 provide enough additional brightness to the middle area (columns X_2 to X_4).

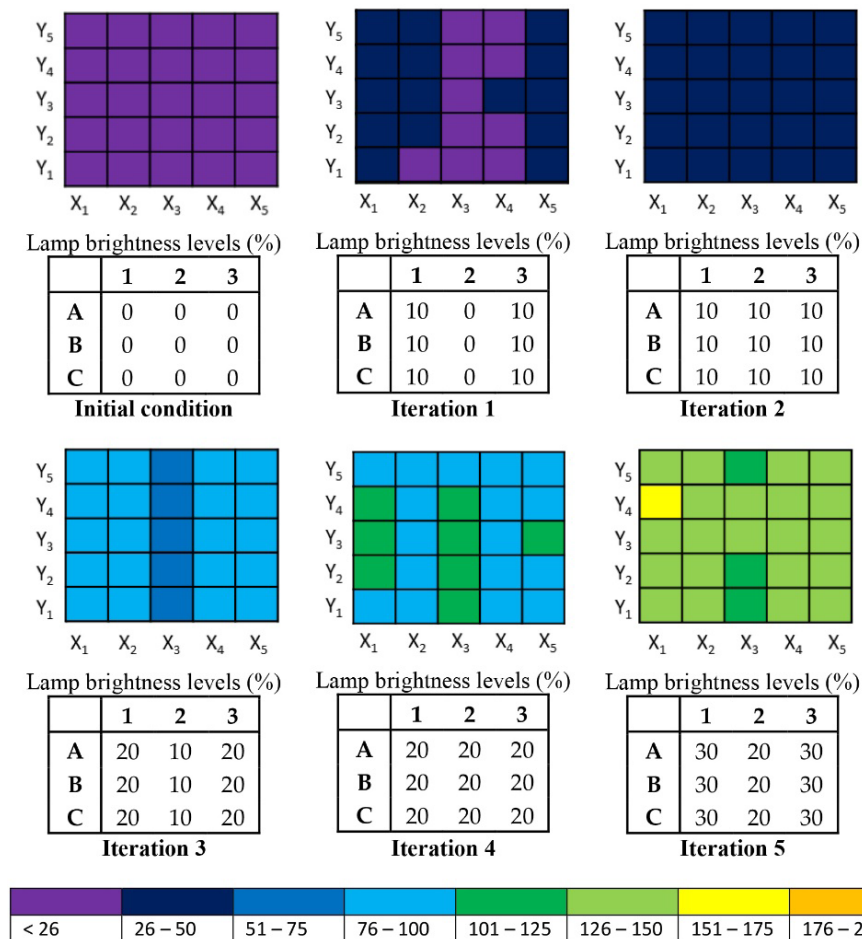


Figure 9. The luminance values and lamp brightness levels for Measurement Scheme 1A.

3.1.2. Measurement Scheme 1B

The room in Measurement Scheme 1B is assumed to be a self-studying room with a large window on one side of the wall and daylight penetrating the room. The initial conditions show that the luminance values of column X_1 are higher than those of the other areas. This condition makes the luminance values of area 1 higher than those of area 2 and triggers the lamps to brighten by 10% in sequence 2: the lamps in column 3 (L_3) brighten first, followed by the lamps in column 2 (L_2), until the average luminance values of both areas are almost the same. To balance the luminance values of areas 1 and 2, the lamps in L_3 adjust to 10% brightness (iteration 1). After the luminance value of the measurement area is balanced, the lamps brighten in sequence 3 to satisfy the required luminance values. In this case, after five iterations, lamps in L_1 and L_2 brighten to 20%, and those in L_3 brighten to 30% to provide luminance values of more than 100 cd/m^2 . Figure 10 shows the luminance values and brightness levels of the lamps at each iteration. Compared to those in Measurement Scheme 1A, the L_1 lamps in Measurement Scheme 1B brighten to a level 10% lower since they are positioned near the window such that the luminance values of column X_1 are higher than those of other areas in the initial condition. However, since the brightness levels of the L_1 lamps are lower in Measurement Scheme 1B

than in Measurement Scheme 1A, most of the luminance values of X1 to X4 are lower in Measurement Scheme 1B than in Measurement Scheme 1A, but they remain higher than the required luminance because of the daylight (the light from the LED Fresnel lamps).

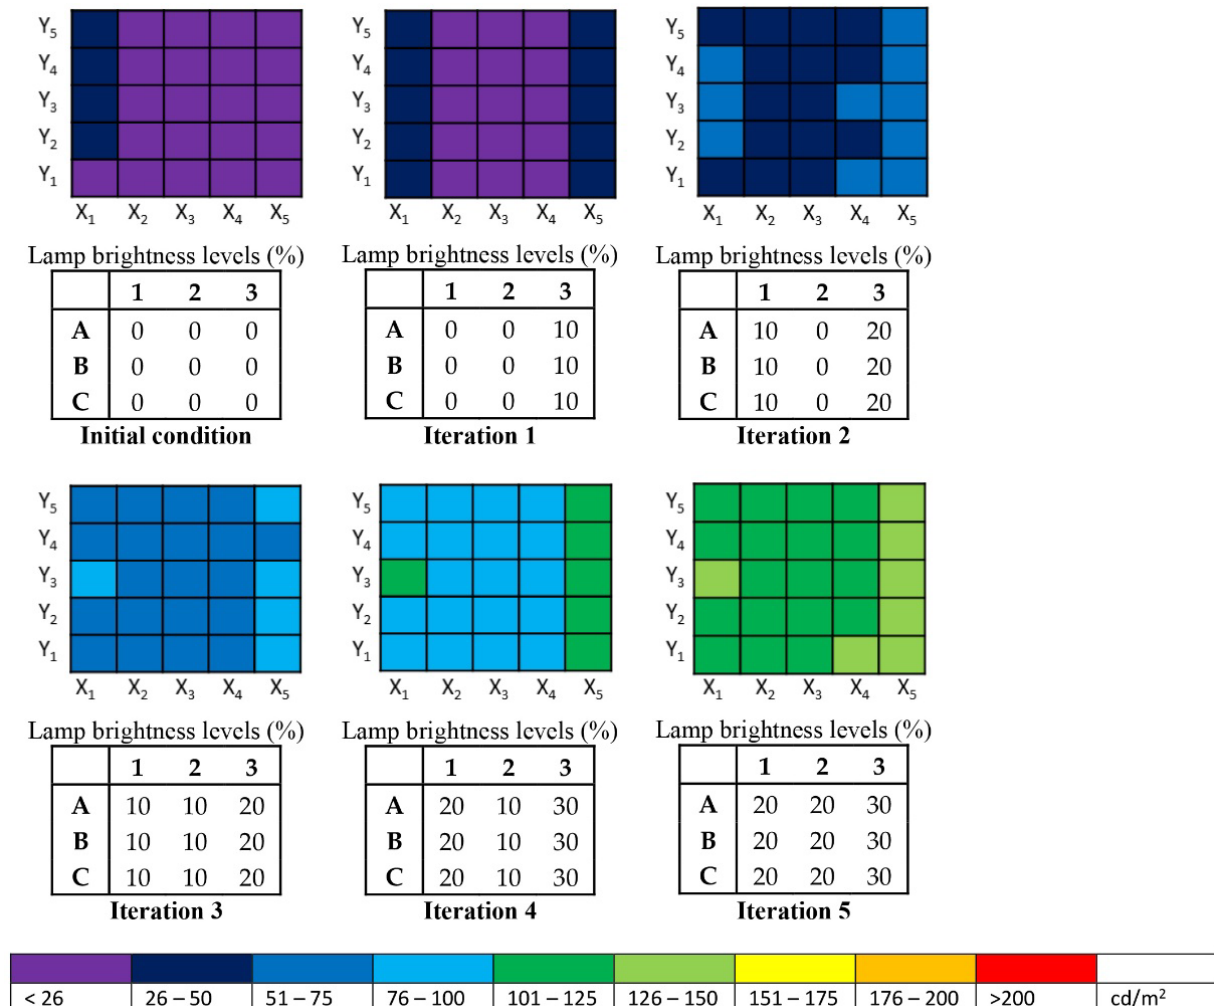


Figure 10. The luminance values and lamp brightness levels for Measurement Scheme 1B.

3.1.3. Measurement Scheme 2A

Measurement Scheme 2A considers that the room has functioned as a conventional classroom without windows, with the luminance required for area A being approximately 120 cd/m² and for area B being approximately 60 cd/m², with a brightness contrast of approximately 1.5 or more. As the initial condition shows that the luminance values of all areas are the same, the lamps brighten in sequence 3, and the lamps in row A (L_A) brighten by 10% until the luminance values of area A are 120 cd/m² or more, shown in iterations 1 to 5. That condition is achieved at iteration 5, with the brightness level of the lamps in L_A being 50%. After that condition is met, the other lamps brighten in sequence 4, which starts with the lamps in row C (L_C), followed by the lamps in row B (L_B). The required luminance levels and the brightness contrast between areas A and B' are met after eight iterations, when the lamps in row A, row B, and row C brighten at 50%, 10%, and 20%, respectively, and the brightness contrast between areas A and B' is approximately 1.7. The lamps in L_A are illuminated to a much greater extent than other lamps since they are placed near the whiteboard and need to provide luminance for the whiteboard, which is higher than the working plane/desks. This condition also provides higher luminance in the front area of the classroom (row Y_5), the area where the teacher stands (Figure 11).

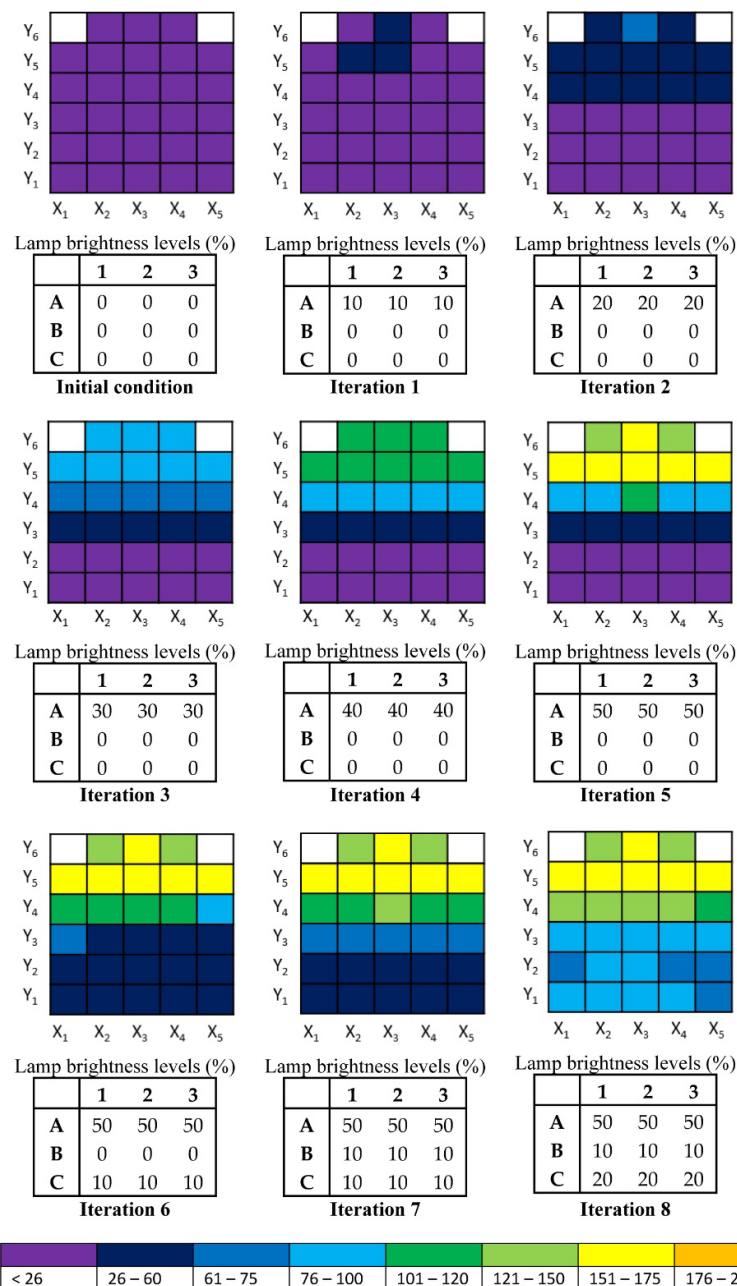


Figure 11. The luminance values and lamp brightness levels for Measurement Scheme 2A.

3.1.4. Measurement Scheme 2B

In Measurement Scheme 2B, the room is assumed to be a conventional classroom with a large window on one side of the wall, where daylight penetrates the room. Since the luminance values of column X1 are higher than those of other areas in the initial condition, the lamps brighten in sequence 2 at iteration 1. At that iteration, the lamps in L3 brighten to 10%, resulting in the luminance values of area 1 and area 2 being almost the same. This condition leads the lamps to brighten in sequence 3, in which the lamps in LA brighten by 10% until the luminance values of area A are approximately 120 cd/m² or more; this condition is met at iteration 6, when the lamps L1A and L2A brighten to 50% and the lamp L3A brightens to 60%. Lamp L3A brightens 10% higher than the other lamps in the same row because it already brightened 10% in iteration 1 to balance the luminance values of areas 1 and 2. After the luminance values of area A met the requirement, the lamps in L_B and L_C brightened in sequence 4. To meet the required luminance values and achieve the contrast between areas A and B', a lamp brightens at 60%, two lamps

brighten at 50%, two lamps brighten at 20%, and the other lamps brighten at 10% after eight iterations (Figure 12). The brightness contrast between areas A and B' is approximately 1.61. Compared to the same lamps in Measurement Scheme 2A, lamps L3A and L3B brighten 10% higher, and L1C and L2C brighten 10% lower. This brightness level difference and the light from the LED Fresnel lamps are assumed to be due to daylight, resulting in the difference in luminance values of the same squares between Measurement Scheme 2A and Measurement Scheme 2B. The squares in row Y₅ mostly have higher luminance values in Measurement Scheme 2B than in Measurement Scheme 2A, while the squares in row Y₄ mostly have higher luminance values in scheme 2B than in scheme 2A. Some squares in rows Y₁ and Y₂ have luminance values of approximately 51–76 cd/m², and some have luminance values of approximately 76–100 cd/m² in Measurement Scheme 2A. However, in Measurement Scheme 2B, all squares in the same rows have luminance values of approximately 51–76 cd/m².

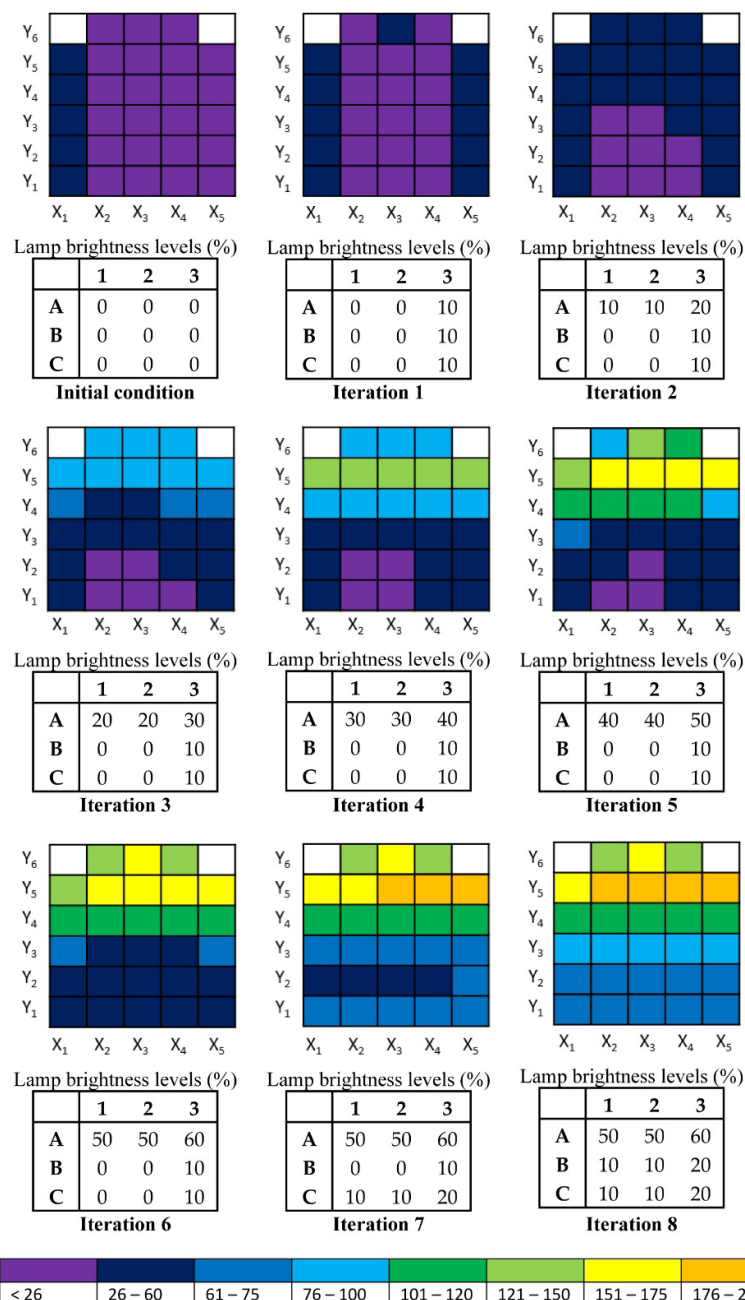


Figure 12. The luminance values and lamp brightness levels for Measurement Scheme 2B.

3.1.5. Measurement Scheme 3A

Measurement Scheme 3A presents the room as an art activity classroom without windows. The luminance required for area A and area B is approximately 100 cd/m^2 and 50 cd/m^2 , respectively, and the brightness contrast should not be less than 1.5. As the initial condition shows that the luminance values of areas 1 and 2 are almost the same, the lamps brighten in sequence 3: L_{2B} in the center of the room, followed by lamps L_{1B} , L_{2C} , L_{3B} , and L_{2A} in the next iteration (by 10%) until the luminance values of area A are 100 cd/m^2 or more. In this scheme, the required luminance values are achieved after seven iterations, when lamp L_{2B} , in the center of the room, brightens to 40% and the four lamps L_{1B} , L_{2C} , L_{3B} , and L_{2A} brighten to 30%. At that iteration, the luminance values of area B are more than 50 cd/m^2 , which is more than the required luminance, and the contrast between areas A' and B is approximately 1.6. Since the luminance values and the brightness contrast requirements are met, the lamps in sequence 4 do not need to brighten, and the rest of the lamps remain turned off. The process of increasing the brightness levels of the lamps and the luminance values at each iteration are shown in Figure 13. The luminance values and lamp brightness levels indicate that, for the room with activities focused on the center, the rear lamps do not need to be turned on because that area needs to remain darker than the center area of the room to create the desired brightness contrast.

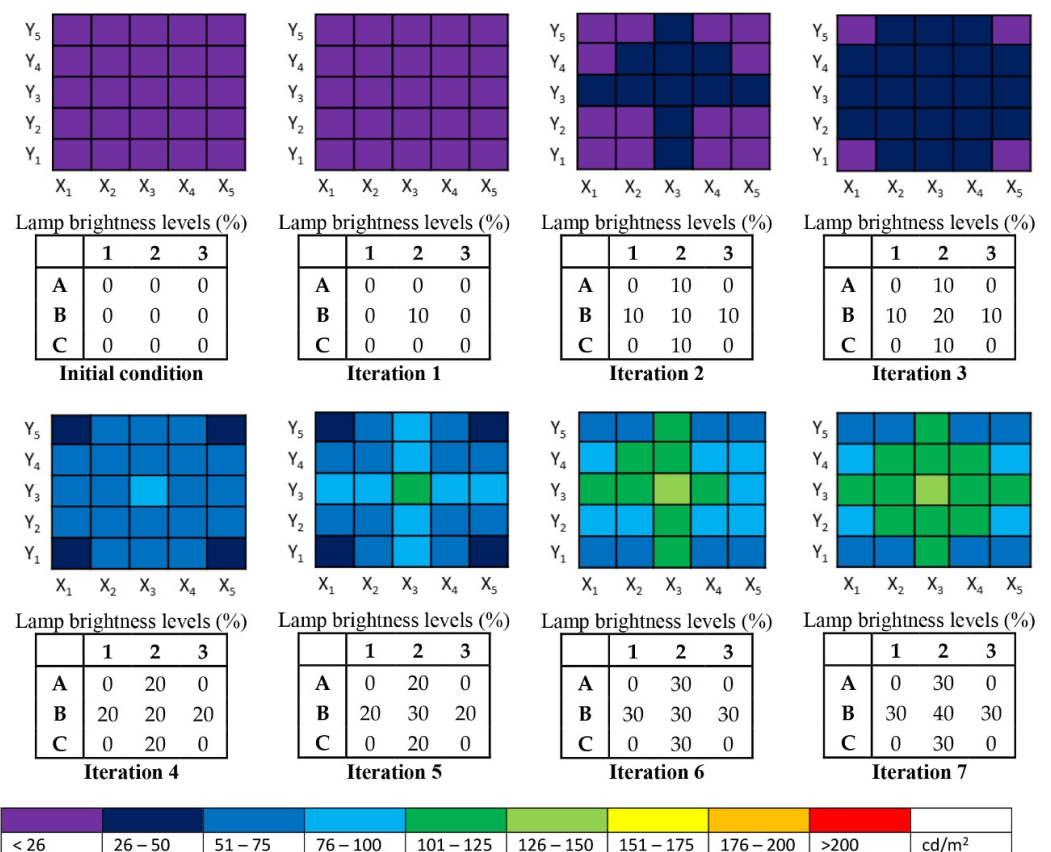


Figure 13. The luminance values and lamp brightness levels for Measurement Scheme 3A.

3.1.6. Measurement Scheme 3B

Measurement Scheme 3B considers the room as an art activity classroom with a large window on one side of the wall and daylight penetrating the room. As the initial condition shows that the average luminance values of area 1 are higher than those of area 2, the lamps brighten in sequence 2 to make the average luminance values of both areas almost the same, which happens at iteration 1, where the lamps in L3 brighten by 10%. After the average luminance values of areas 1 and 2 are almost the same, the lamps brighten in

sequence 3 to ensure that the luminance values of area A are approximately 100 cd/m² or higher. In this measurement scheme, the required luminance values are achieved at iteration 7, in which lamp L3B is brightened to 40%, the four lamps L1B, L2B, L2A, and L2C are brightened to 30%, the two lamps L3A and L3C are brightened to 10%, and the two other lamps are off. However, the brightness contrast between areas A' and B is only 1.4, which is still lower than the requirement. Therefore, at iteration 8, the brightness level of lamp L2B increases to 40%, leading two lamps to brighten to 40%, three lamps to brighten to 30%, and two lamps to brighten to 20%. At this iteration, the brightness contrast between areas A' and B is approximately 1.6; thus, all requirements are met. This condition shows that in the presence of daylight, even the luminance values meet the requirement, but the lamp brightness levels still increase because the brightness contrast needs to be maintained at a given value. In this scheme, lamps L3A and L3B brighten 10% more than the same lamps in Measurement Scheme 3A because of the presence of daylight. Figure 14 shows the process of brightening the lamps and the luminance values at each iteration.

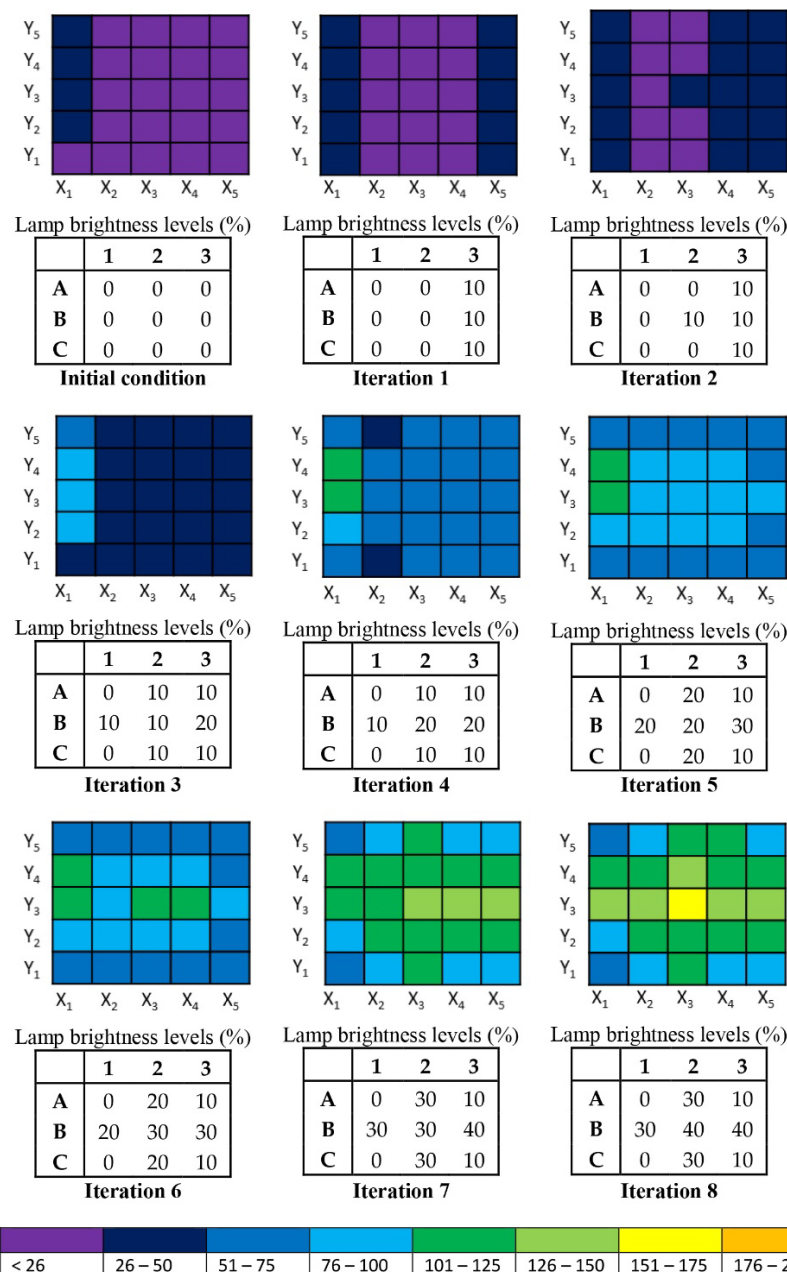


Figure 14. The luminance values and lamp brightness levels for Measurement Scheme 3B.

Table 4 summarizes the brightness levels of the lamps in each measurement scheme. The LCS resulted in different combinations of lamp brightness levels for different activities. In Measurement Schemes 1A and 1B, the presence of daylight resulted in a lower brightness level in Measurement Scheme 1B; in Measurement Schemes 2A and 2B, the daylight resulted in the brightness levels of some lamps being lower and those of other lamps being higher than the corresponding levels in the room without daylight, and in Measurement Schemes 3A and 3B, the presence of daylight increased rather than decreased the brightness levels of some lamps. These results show that daylight presence does not always have a great reducing impact on lamp brightness levels. Despite the presence of daylight in Measurement Scheme 3B, the brightness levels of some lamps are higher in Measurement Scheme 3B than in Measurement Scheme 3A because the activity is focused on the center of the room and the brightness contrast between the center of the room and the background area needs to be maintained at the given value.

Table 4. The brightness levels of each lamp in each measurement scheme.

Measurement Scheme	Number of Lamps Brightened at						
	60%	50%	40%	30%	20%	10%	off
1A	-	-	-	6	3	-	-
1B	-	-	-	3	6	-	-
2A	-	3	-	-	3	3	-
2B	1	2	-	-	2	4	-
3A	-	-	1	4	-	-	4
3B	-	-	2	3	-	2	2

The prototype successfully demonstrates the utilization of an IP cam as a luminance meter for simultaneously measuring several spots in a whole room and reveals that an IP cam can replace several traditional spot lighting sensors. In all measurement schemes, the HDRis produced by the IP cam prove successful in measuring the luminance values under various settings and functions of the room without changing the sensor or requiring additional sensors. In summary, the HDRi method supports IP cam utilization as a set of “field of view” sensors for a flexible space.

3.2. Energy Consumption

In this section, the energy consumption of the lamps in each scheme, wherein the equilibrium condition is met and the lamp brightness levels no longer change, is monitored by using an energy meter, and compared to the baseline condition of nine lamps, at 100% brightness. The energy consumption of the baseline, with nine LED lamps at 100% brightness, is approximately 558 W. Table 5 summarizes the energy consumption of each measurement scheme and the energy savings compared to the baseline. For Measurement Scheme 1, Measurement Scheme 1A consumes 14.58% more energy than Measurement Scheme 1B; however, for Measurement Scheme 2, Measurement Scheme 2A and Measurement Scheme 2B consume almost the same amount of energy, and for Measurement Scheme 3, Measurement Scheme 3B consumes 19% more energy than Measurement Scheme 3A. Compared to the measurement schemes without daylight, Measurement Schemes 2 and 3 with daylight do not save energy. This finding indicates that daylight does not always result in more energy savings because, for certain activities, the lamps still need to be turned on to maintain the brightness contrast and provide visual comfort. The applied LCS can save approximately 73.39%, 76.77%, 73.71%, 73.49%, 82.38%, and 79.03% of the energy consumed under baseline for Measurement Schemes 1A, 1B, 2A, 2B, 3A, and 3B, respectively, since most of the lamps are only brightened to between 10% and 60%.

Table 5. The comparison of the energy consumption.

Measurement Scheme	Energy Consumption (W)	Energy Saving (%)
1A	148.5	73.39
1B	129.6	76.77
2A	146.7	73.71
2B	147.9	73.49
3A	98.3	82.38
3B	117	79.03

4. Conclusions

This study presents an LCS prototype based on HDRi using a LabVIEW platform that consists of a 360° IP camera, a DMX controller, and several LED lamps to provide visual comfort and energy savings. The brightness levels of the LED lamps are changed in sequence to meet the luminance value requirement. The prototype is applied to the room assumed as a classroom with three different measurement schemes: the first is a self-studying room that requires a uniform luminance value of approximately 100 cd/m², the second is a conventional classroom with a whiteboard that requires luminance values of approximately 120 cd/m² for the whiteboard and 60 cd/m² for the working plane/desks, with a brightness contrast between the whiteboard and the working plane/desks of approximately 1.5, and the latter is an art activity classroom that requires different luminance values for the center area and background area, which are 100 cd/m² and 50 cd/m², respectively, with a brightness contrast between the center area and the background area of approximately 1.5. The findings of this study are summarized as follows:

1. The LCS based on HDRi that brightens the lamps in sequence can be a solution to be applied in a room with various functions and activities, and in the presence of daylight to provide visual comfort. This prototype proves that the LCS works well for a room that requires a uniform luminance value, and for a room that requires different luminance values and brightness contrast, with or without daylight.
2. The results of this study indicate that lamp brightness levels vary depending on the activities that occur in the room. The lamp brightness levels of the different schemes are as follows:
 - a. Measurement Scheme 1A: 6 lamps at 30% brightness and 3 lamps at 20% brightness
 - b. Measurement Scheme 1B: 3 lamps at 30% brightness and 6 lamps at 30% brightness
 - c. Measurement Scheme 2A: 3 lamps at 50% brightness, 3 lamps at 20% brightness, and 3 lamps at 10% brightness
 - d. Measurement Scheme 2B: 1 lamp at 60% brightness, 2 lamps at 50% brightness, 2 lamps at 20% brightness, and 4 lamps at 10% brightness
 - e. Measurement Scheme 3A: 1 lamp at 40% brightness, 4 lamps at 30% brightness, and 4 lamps turned off
 - f. Measurement Scheme 3B: 2 lamps at 40% brightness, 3 lamps at 30% brightness, 2 lamps at 10% brightness, and 2 lamps turned off
3. Compared to the electricity consumption of the baseline, with nine LED lamps brightened at 100%, which is approximately 558 W, the LCS prototype presented can achieve energy savings for scheme 1A, scheme 1B, scheme 2A, scheme 2B, scheme 3A, and scheme 3B of approximately 73.39%, 76.77%, 73.71%, 74.49%, 82.38%, and 79.03%, respectively.
4. The presence of daylight does not always result in more energy savings since the brightness contrast should be considered to achieve visual comfort.
5. This study demonstrates the advantages in supporting the flexible use of space of “field of view” sensors over traditional spot lighting sensors.

Author Contributions: Conceptualization, A.B.; methodology, Y.-S.C.; software, A.B.; validation, A.B.; formal analysis, A.B. and Y.-S.C.; investigation, A.B.; resources, Y.-S.C.; data curation, A.B. and Y.-S.C.; writing—original draft preparation, A.B.; writing—review and editing, A.B.; visualization, A.B.; supervision, Y.-S.C.; project administration, A.B. and Y.-S.C.; funding acquisition, Y.-S.C. All authors have read and agreed to the published version of the manuscript.

Funding: This research was funded by the Taiwan Ministry of Science (Project No.: MOST 109-2221-E-011-033-) and by the Taiwan Ministry of Education.

Acknowledgments: The authors would like to thank Ben-Cheng Guo for assisting the HDRi processing using a 360° IP camera, Ronaldo Gabe Manik for assisting Arduino Uno utilization as DMX controller, and the ISAAC (Integrating Simulation and Analysis for Architectural Complexity) Lab at the National Taiwan University of Science and Technology (NTUST) of Taiwan (R.O.C.). for supporting this research.

Conflicts of Interest: The authors declare no conflict of interest.

Appendix A

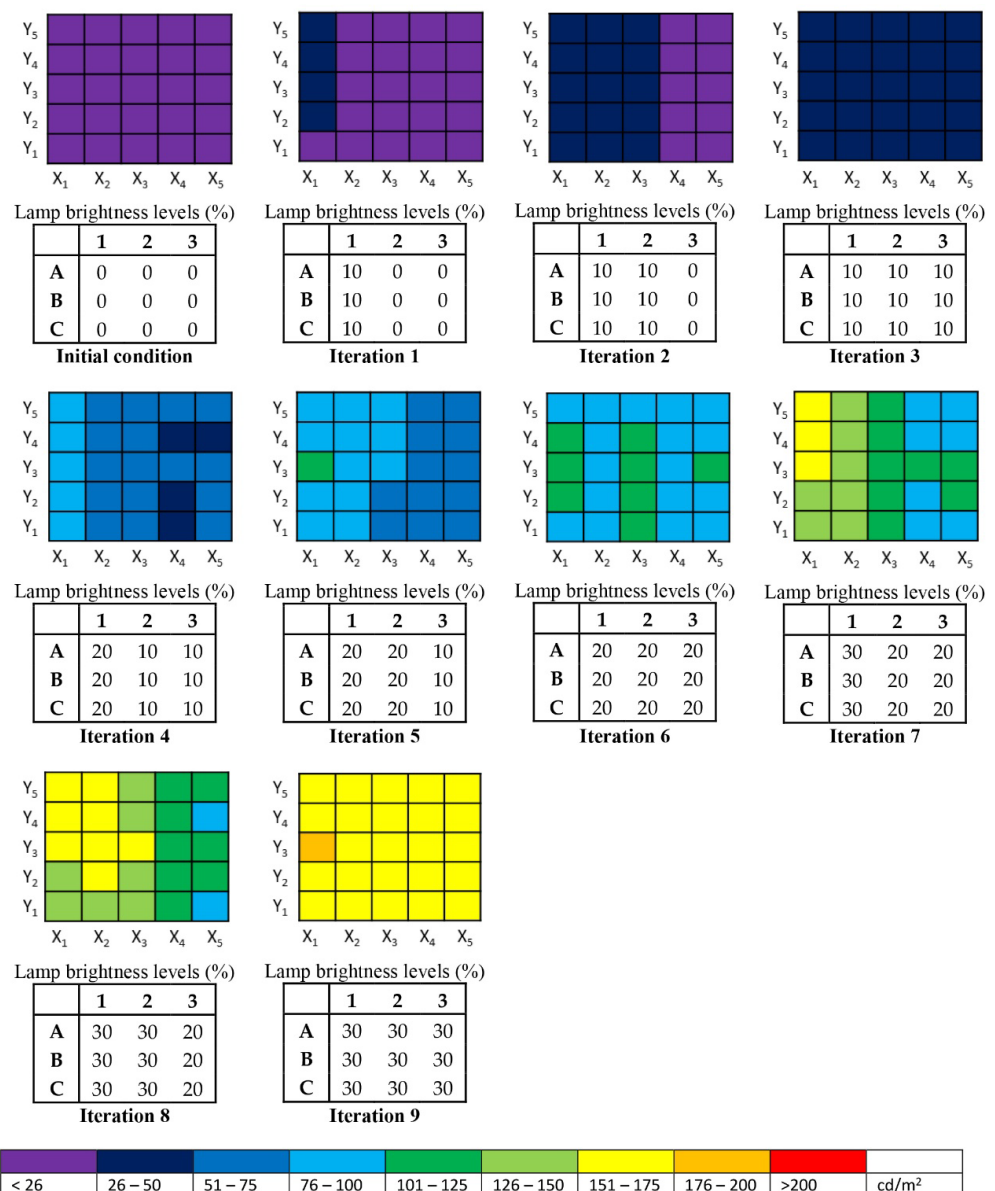


Figure A1. The luminance values and lamp brightness levels of Measurement Scheme 1A in each iteration. The lamps brighten in the sequence of L_1 , L_2 , and L_3 .

References

- Kruisselbrink, T.; Dangol, R.; van Loenen, E. A comparative study between two algorithms for luminance-based lighting control. *Energy Build.* **2020**, *228*, 110429. [CrossRef]
- Kumar, A.; Kar, P.; Warriar, R.; Kajale, A.; Panda, S. Implementation of Smart LED Lighting and Efficient Data Management System for Buildings. *Energy Procedia* **2017**, *143*, 173–178. [CrossRef]
- Haq, M.A.U.; Hassan, M.Y.; Abdullah, H.; Rahman, H.A.; Abdullah, P.; Hussin, F.; Said, D.M.; Haq, M.A.U.; Hassan, M.Y.; Abdullah, H.; et al. A review on lighting control technologies in commercial buildings, their performance and affecting factors. *Renew. Sustain. Energy Rev.* **2014**, *33*, 268–279. [CrossRef]
- Mohamed, S.; Minhat, M.; Kasim, M.; Adam, M.; Sulaiman, M.; Rizman, Z. An Intelligent Lighting Control System (ILCS) using LabVIEW. *J. Fundam. Appl. Sci.* **2018**, *9*, 602. [CrossRef]
- Doulos, L.T.; Kontadakis, A.; Madias, E.N.; Sinou, M.; Tsangrassoulis, A. Minimizing energy consumption for artificial lighting in a typical classroom of a Hellenic public school aiming for near Zero Energy Building using LED DC luminaires and daylight harvesting systems. *Energy Build.* **2019**, *194*, 201–217. [CrossRef]
- Cheng, Y.; Fang, C.; Yuan, J.; Zhu, L. Design and Application of a Smart Lighting System Based on Distributed Wireless Sensor Networks. *Appl. Sci.* **2020**, *10*, 8545. [CrossRef]
- Frascarolo, M.; Martorelli, S.; Vitale, V. An innovative lighting system for residential application that optimizes visual comfort and conserves energy for different user needs. *Energy Build.* **2014**, *83*, 217–224. [CrossRef]
- Sun, B.; Zhang, Q.; Cao, S. Development and Implementation of a Self-Optimizable Smart Lighting System Based on Learning Context in Classroom. *Int. J. Environ. Res. Public Health* **2020**, *17*, 1217. [CrossRef]
- Karyono, K.; Abdullah, B.; Cotgrave, A.; Bras, A. A Novel Adaptive Lighting System Which Considers Behavioral Adaptation Aspects for Visually Impaired People. *Buildings* **2020**, *10*, 168. [CrossRef]
- Carrillo, C.; Diaz-Dorado, E.; Cidrás, J.; Bouza-Pregal, A.; Falcón, P.; Fernández, A.; Álvarez-Sánchez, A. Lighting control system based on digital camera for energy saving in shop windows. *Energy Build.* **2013**, *59*, 143–151. [CrossRef]
- Cheng, Z.; Zhao, Q.; Wang, F.; Jiang, Y.; Xia, L.; Ding, J. Satisfaction based Q-learning for integrated lighting and blind control. *Energy Build.* **2016**, *127*, 43–55. [CrossRef]
- Shen, E.; Hu, J.; Patel, M. Energy and visual comfort analysis of lighting and daylight control strategies. *Build. Environ.* **2014**, *78*, 155–170. [CrossRef]
- Chiou, Y.-S.; Saputro, S.; Sari, D.P. Visual Comfort in Modern University Classrooms. *Sustainability* **2020**, *12*, 3930. [CrossRef]
- Suk, J.Y. Luminance and vertical eye illuminance thresholds for occupants' visual comfort in daylit office environments. *Build. Environ.* **2018**, *148*, 107–115. [CrossRef]
- Chraïbi, S.; Creemers, P.; Rosenkötter, C.; Van Loenen, E.; Aries, M.; Rosemann, A. Dimming strategies for open office lighting: User experience and acceptance. *Light. Res. Technol.* **2018**, *51*, 513–529. [CrossRef]
- Yu, T.-H.; Kwon, S.-Y.; Im, K.-M.; Lim, J.-H. An RTP-based dimming control system for visual comfort enhancement and energy optimization. *Energy Build.* **2017**, *144*, 433–444. [CrossRef]
- Benefits of Programming Graphically in NI LabVIEW Table of Contents A Brief History of the Pursuit of Higher-Level Pro-Gramming. Available online: http://www.technologyreview.com/sites/default/files/legacy/benefits_of_programming_graphically_with_lv.pdf (accessed on 10 January 2022).
- Tasner, T.; Lovrec, D.; Tasner, F.; Edler, J. Comparison of LabVIEW and MATLAB for scientific research. *Ann. Fac. Eng. Hunedoara* **2012**, *3*, 389–394.
- Bogdan, M. Light Intensity Control Using Arduino Uno and Lab VIEW. In Proceedings of the 13th International Conference on Virtual Learning (ICVL), Alba Iulia, Romania, 26–28 October 2018; pp. 306–310.
- Schwartz, M.; Manickum, O. *Programming Arduino with LabVIEW*; Packt Publishing: Birmingham, UK, 2015.
- Reinhard, E.; Wolfgang, H.; Debevec, P.; Pattanaik, S.; Ward, G.; Myszkowski, K. *High Dynamic Range Imaging: Acquisition, Display and Image-Based Lighting*, 2nd ed.; Morgan Kaufmann: Burlington, MA, USA, 2010.
- Debevec, P.E.; Malik, J. Recovering high dynamic range radiance maps from photographs. In Proceedings of the SIGGRAPH '97: Proceedings of the 24th Annual Conference on Computer Graphics and Interactive Techniques, Los Angeles, CA, USA, 3–8 August 1997; pp. 369–378. [CrossRef]
- Radiance: A Simulation Tool for Daylighting Systems. Available online: <http://radsite.lbl.gov/radiance/refer/rc97tut.pdf> (accessed on 10 January 2022).
- Pierson, C.; Cauwerts, C.; Bodart, M.; Wienold, J. Tutorial: Luminance Maps for Daylighting Studies from High Dynamic Range Photography. *LEUKOS* **2020**, *17*, 140–169. [CrossRef]
- Inanici, M. Evaluation of high dynamic range photography as a luminance data acquisition system. *Light. Res. Technol.* **2006**, *38*, 123–134. [CrossRef]
- Kruisselbrink, T.; Aries, M.; Rosemann, A. A Practical Device for Measuring the Luminance Distribution. *Int. J. Sustain. Light.* **2017**, *19*, 75–90. [CrossRef]
- Safranek, S.; Davis, R.G. Sources of Error in HDRI for Luminance Measurement: A Review of the Literature. *LEUKOS-J. Illum. Eng. Soc. N. Am.* **2020**, *17*, 187–208. [CrossRef]
- BS EN 12464-1:2021; BSI Standards Publication Light and Lighting—Lighting of Work Places Part 1: Indoor Work Places. BSI Standards Limited 2021: London, UK, 2021.

29. Chinomi, N.; Leelajindakrairerk, M.; Boontaklang, S.; Chompoo-Inwai, C. Design and Implementation of a smart monitoring system of a modern renewable energy micro-grid system using a low-cost data acquisition system and LabVIEW™ program. *J. Int. Counc. Electr. Eng.* **2017**, *7*, 142–152. [[CrossRef](#)]
30. Essick, J. *Hands-On Introduction to LabVIEW for Scientists and Engineers*; Oxford University Press: New York, NY, USA, 2009.
31. Hamed, B. Design & Implementation of Smart House Control Using LabVIEW. *Int. J. Soft Comput. Eng.* **2012**, *1*, 98–106.
32. Angalaeswari, S.; Deepa, T.; Subbulekshmi, D.; Krithiga, S.; Reddy, M.N.; Siddartha, K.; Chaitanya, C. Smart House Control using LabVIEW. *J. Phys. Conf. Ser.* **2021**, *1716*, 012004. [[CrossRef](#)]
33. Taleb, M.; Mannsour, N. A self-controlled energy efficient office lighting system. *J. Assoc. Arab Univ. Basic Appl. Sci.* **2012**, *11*, 9–15. [[CrossRef](#)]
34. Chiou, Y.; Lin, Y. A Portable Testbed for Integrative Daylighting Design. In Proceedings of the PLEA 2016 Proceedings, Cities, Buildings People: Toward Regenerative Environments, Los Angeles, CA, USA, 11–13 July 2016.