



# Energy

Supports open access

15.3  
CiteScore

9.0  
Impact Factor

[Submit your article ↗](#)

[Guide for authors](#)

Menu

Search in this journal

## About the journal

*Energy* is an international, multi-disciplinary journal in **energy engineering** and research, and a flagship journal in the Energy area. The journal aims to be a leading peer-reviewed platform and an authoritative source of information for analyses, reviews and evaluations related to **energy**.

The ...

[View full aims & scope](#)

## Article publishing options

### Open Access

Article Publishing Charge (APC): **USD 4.260 (excluding taxes)**. The amount you pay may be reduced during submission if applicable. Review [this journal's open access policy](#).

### Subscription

No publication fee charged to authors, and published articles are immediately available to subscribers.

32 days ⓘ

Time to first decision

126 days ⓘ

Review time

149 days ⓘ

Submission to acceptance

8 days ⓘ

Acceptance to publication



[View all insights](#)



# Energy

Supports open access

15.3  
CiteScore

9.0  
Impact Factor

[Submit your article](#) ↗


[Guide for authors](#)

Menu

Search in this journal

## Editorial board

### Gender diversity of editors and editorial board members



- 69% man
- 29% woman
- 2% prefer not to disclose
- 0% non-binary or gender diverse

Data represents responses from 76.90% of 121 editors and editorial board members

### Editorial board by country/region

119 editors and editorial board members in 39 countries/regions

- 1 China (22)
- 2 United States (11)
- 3 Brazil (8)

[See more editors by country/region](#)

## Editor-in-Chief



**Prof. Dr. Ruzhu Wang, PhD**

Shanghai Jiao Tong University, Shanghai, China

Energy utilization in HVAC &, Refrigeration systems, Thermal activated cooling, Building energy saving with efficient use of solar and ambient energy, Innovative researches on Energy-Material-Air-Water,

[> View full biography](#)

## Deputy Editors-in-Chief



**Neven Duić, PhD**

University of Zagreb Faculty of Mechanical Engineering and Naval Architecture, Zagreb, Croatia

Energy planning, Demand response, Power to heat, Power to mobility, Energy system analysis

[> View full biography](#)



**Paula Ferreira, PhD**

Guimarães, Portugal

Energy planning, Energy economics, Impact assessment, Sustainability

[> View full biography](#)

## Editor of Conference Relation and Special Issues



**Henrik Lund, M.Sc.Eng., Ph.D., Dr.Tech**

Aalborg University, Aalborg, Denmark

Energy Planning, Energy Systems Analysis, Energy Modelling, Green Transition, Energy Policy

[> View full biography](#)

## Subject Editors



## Rafaela Agathokleous

University of Cyprus, Lefkosia, Cyprus



## Ofelia Q. F. Araujo, PhD

Federal University of Rio de Janeiro, RIO DE JANEIRO, Brazil

CO<sub>2</sub> capture and utilization, Energy transition, Sustainability metrics, Fossil fuels, Lifecycle analysis, Energy efficiency, Decarbonization, Energy and environment, Process Systems Engineering

[> View full biography](#)



## Rangan Banerjee

Indian Institute of Technology Delhi, New Delhi, India

Demand Side Management, Energy Modelling, Power Systems Planning, Energy Planning and Policy, Cogeneration, Fuel cell/Hydrogen storage

[> View full biography](#)



## Wojciech Bujalski

Warsaw University of Technology, Warszawa, Poland



## Huang Diangui, PhD

University of Shanghai for Science and Technology School of Energy and Power Engineering, Shanghai, China

Wind Energy, turbomachinery

[> View full biography](#)



## Neven Duić, PhD

University of Zagreb Faculty of Mechanical Engineering and Naval Architecture, Zagreb, Croatia

Energy planning, Demand response, Power to heat, Power to mobility, Energy system analysis

[> View full biography](#)



### Yee Van Fan, PhD

Brno University of Technology, Brno, Czech Republic

Solid waste treatment and management, Composting, Waste to energy, Emissions assessment and mitigation, Transportation Mode Choice, Life Cycle Assessment, Footprint and sustainability assessment, Biomass, Renewable Energy Integration, Electrification, Biochar

[> View full biography](#)



### Yilin Fan, PhD

Thermal Laboratory and Energy of Nantes, Nantes, France

Heat and mass transfer, Thermal energy recovery, storage and management, Optimization of energy systems, Heat sinks and heat exchangers, Nature-inspired design and topology optimization

[> View full biography](#)



### Paula Ferreira, PhD

Guimarães, Portugal

Energy planning, Energy economics, Impact assessment, Sustainability

[> View full biography](#)



### Tianshu S. Ge

Shanghai Jiao Tong University - Fahu Campus, Shanghai, China



### Yurong He, PhD

Harbin Institute of Technology, Harbin, China

Renewable energy, Energy storage, Energy management, Flow &, heat and mass transfer, Batteries, Phase change material, Fluidization in chemical engineering

[> View full biography](#)



### Gregorio Iglesias, PhD

University College Cork, Ireland AND University of Plymouth, Cork, Ireland

Offshore renewable energy, marine renewable energy, wind energy, wave energy, tidal energy, coastal engineering, offshore wind



**Chew Tin Lee, PhD**

University of Technology Malaysia, Skudai, Malaysia

Biomass to energy, Energy and environment, Greenhouse gases inventory, Sustainable materials, Waste management, Circular Economy, Greenhouse gases inventory

[> View full biography](#)



**Qiang Liao, PhD**

Chongqing University School of Energy and Power Engineering, Chongqing, China

Heat and Mass Transfer, Interfacial Phenomena, Fuel Cell, Energy Conservation, Microbial Energy Conversion

[> View full biography](#)



**Henrik Lund, M.Sc.Eng., Ph.D., Dr.Tech**

Aalborg University, Aalborg, Denmark

Energy Planning, Energy Systems Analysis, Energy Modelling, Green Transition, Energy Policy

[> View full biography](#)



**Lingai Luo**

National Centre for Scientific Research, Paris, France

[> View full biography](#)

**Diego Fernando Manotas-Duque, PhD**

University of the Valley, Cali, Colombia

Energy economics, energy finance, financial engineering and energy planning, incorporating economic and environmental criteria.

[> View full biography](#)



**Natasa Markovska, PhD**

Macedonian Academy of Sciences and Arts, Skopje, North Macedonia

Sustainable Energy Development, Decarbonization

[> View full biography](#)



**Adel Mellit**

University of Mohammed Seddik Benyahia Jijel Faculty of Science and Technology, Jijel, Algeria



**Benedetto Nastasi, PhD**

University of Rome Tor Vergata, Roma, Rome, Italy

Hydrogen, Smart Energy Systems, Energy Flexibility, Energy in Buildings, Renewables, Building energy data and analytics

[> View full biography](#)



**Sandro Nižetić, PhD, Professor**

University of Split Faculty of Electrical Engineering Mechanical Engineering and Naval Architecture, Split, Croatia

Clean Energy and Sustainable Engineering, Energy Efficiency, Mechanical Engineering, Thermodynamics and Fluid Mechanics, Energy and Exergy Analysis, Renewable Energy, Heating and Cooling, Energy Economics, Energy Savings, Energy use and integration

[> View full biography](#)



**Xunmin Ou**

Tsinghua University, Beijing, China

Transport Energy, LCA, Energy Strategy

[> View full biography](#)



**Tomislav Pukšec, PhD**

University of Zagreb Faculty of Mechanical Engineering and Naval Architecture, Zagreb, Croatia

smart energy systems, distric heating, GIS, biogas, energy demand modelling, sustainable development, renewables

[> View full biography](#)



### Iva Skov, PhD

Aalborg University Copenhagen Department of Planning, København, Denmark

Energy Planning and Renewable Energy Systems, Power-to-X, electrofuel

[> View full biography](#)



### Isabel Soares

University of Porto, Porto, Portugal

[> View full biography](#)



### Vladimir Stevanovic, PhD

University of Belgrade, Beograd, Serbia

Thermal and Nuclear Power Engineering, Thermal-Hydraulics, Heat and Mass Transfer, Energy Planning and Policy

[> View full biography](#)



### Petar S. Varbanov, Dr Habil, PhD

Brno University of Technology, Brno, Czech Republic

Energy saving and efficiency, Development and implementation of Process Integration, Total Site and regional integration for energy, Water and Circular Economy– including retrofit, Waste to energy, Wastewater minimisation leading to GHG and water footprints reduction

[> View full biography](#)



### Ruzhu Wang, PhD

Shanghai Jiao Tong University, Shanghai, China

Energy utilization in HVAC &, Refrigeration systems, Thermal activated cooling, Building energy saving with efficient use of solar and ambient energy, Innovative researches on Energy-Material-Air-Water,

[> View full biography](#)

### Shengwei Wang

The Hong Kong Polytechnic University Department of Building Environment and Energy Engineering, Hong kong, Hong Kong



### Chun Yang, PhD

Nanyang Technological University, Singapore, Singapore

Thermal Engineering, Microfluidics, Electrokinetic Transport Phenomena, Thermal Energy

[> View full biography](#)



### Chuan Zhang, PhD

Peking University, Beijing, China

Energy systems decarbonization, techno-economic analysis, environment impact assessment, thermodynamics

[> View full biography](#)



### Xiliang Zhang, PhD

Tsinghua University, Beijing, China



### Xudong Zhao, PhD

University of Hull, Hull, United Kingdom

Energy Efficiency, Renewable Energy, Solar Thermal and PV, Sustainable Heating and Cooling, Heat Pump, Air Dehumidification, Smart Energy Systems

[> View full biography](#)



### Davide Ziviani, PhD

Purdue University, West Lafayette, Indiana, United States

Heat Pumps, Thermal Management Systems, Deep Space Habitats, HVAC&R

[> View full biography](#)

## Honorary Editor



Soteris Kalogirou, PhD, DSc

Cyprus University of Technology, Lemesos, Cyprus

Solar Energy, Renewable Energy Systems, Solar Cooling, Desalination

[> View full biography](#)

## Ethics Editor

Meng Yuan

Aalborg University, Aalborg, Denmark

## Editorial Board Members

Robert Boehm

University of Nevada Las Vegas, Las Vegas, Nevada, United States



Maria de Graca Carvalho

University of Lisbon, Lisboa, Portugal



M Dolores Esteban

Universidad Politécnica de Madrid, Boadilla del Monte, Madrid, Spain



Mejdi Jeguirim

Mulhouse Materials Science Institute, Mulhouse, France

[> View full biography](#)

Alberto Mirandola

University of Padua, Padova, Italy



R. Venkata Rao

Sardar Vallabhbhai National Institute of Technology, Surat, India

[> View full biography](#)



## Ray (Zhenhua) Rui

China University of Petroleum Beijing, Chang Ping Qu, China

[> View full biography](#)

## Enrico Sciubba

University of Rome La Sapienza, Roma, Italy

## John Twidell

AMSET Centre, Market Harborough, United Kingdom



## Peng Zhang

Shanghai Jiao Tong University - MinHang Campus, Shanghai, China

[> View full biography](#)



## Mustafa Acaroğlu

Selçuk University, Konya, Türkiye

Energy Engineering, Fuel, Biofuel, Renewable Energy sources, Energy policy

[> View full biography](#)



## Yuri Aristov

Boreskov Institute of Catalysis SB RAS, Novosibirsk, Russian Federation

Physical Chemistry, Adsorptive heat storage and conversion, Thermochemical heat storage

[> View full biography](#)



## Bin Chen

Beijing Normal University, Beijing, China

Environmental Science, Energy Sustainability, Energy NEXUS, Environmental management, Climate change, Urban sustainability

[> View full biography](#)



## José Goldemberg

University of São Paulo, São Paulo, Brazil

[> View full biography](#)



## Xiaosong Hu

Chongqing University, Chongqing, China

New energy vehicle power system control and optimization



## Hongguang Jin

Chinese Academy of Sciences, Beijing, China

[> View full biography](#)



## Hussam Jouhara

Brunel University London, London, United Kingdom

Heat pipes, Heat Energy Storage, Cryogenic heat transfer systems, Single and two-phase heat transfer, Waste heat recovery systems, Heat pipe based solar collectors, Development of sizing tools of heat exchangers, Energy active shelves, Thermal management

[> View full biography](#)



## Tahir Hikmet Karakoç

Eskişehir Technical University, Eskişehir, Türkiye

## Willett Kempton

University of Delaware, Newark, Delaware, United States

[> View full biography](#)



## Venkat Krishnan

National Renewable Energy Laboratory, Golden, Colorado, United States



### Omid Mahian

Ningbo University Faculty of Mechanical Engineering and Mechanics, Ningbo, China

Renewable Energy systems, Hybrid energy system, Nanotechnology, Hybrid computational methods

[> View full biography](#)



### Christos Markides

Imperial College London, London, United Kingdom

Energy, Heat Transfer, Thermal Engineering, Multiphase Flows, Optical Diagnostics, Experimental Techniques

[> View full biography](#)



### Alan Meier

E O Lawrence Berkeley National Laboratory, Berkeley, California, United States

[> View full biography](#)



### Tatiana Morosuk

TU Berlin University, Berlin, Germany

Exergy-based methods, Advanced exergy-based methods, Refrigeration, Cryogenics, Power generation, Optimization

[> View full biography](#)



### Constantine Rakopoulos

National Technical University of Athens, Zografos, Greece

Internal combustion engines, Combustion and Pollution, Heat transfer

[> View full biography](#)



### Dimitrios Rakopoulos

Centre for Research and Technology-Hellas, Thessaloniki, Greece

[> View full biography](#)



## Julieta Schallenberg

University of Las Palmas de Gran Canaria, Las Palmas de Gran Canaria, Spain

renewable energies, 100% RES, wind, solar, RES application, desalination, etc., RES storage

[> View full biography](#)



## Claudia Sheinbaum-Pardo

Autonomous National University of Mexico Faculty of Engineering, Ciudad de México, Mexico



## Gordana Stefanovic

University of Niš, Niš, Serbia



## Sergio Ulgiati

University of Naples Parthenope, Napoli, Italy

[> View full biography](#)



## Vittorio Verda

Polytechnic of Turin, Torino, Italy



## William M. Worek

Texas A&M University-Kingsville Eagle Ford Center for Research and Outreach, Kingsville, Texas, United States

[> View full biography](#)



Ernst Worrell

Utrecht University, Utrecht, Netherlands

Sustainable energy systems, energy efficiency, industrial energy use, material efficiency, circular economy

[> View full biography](#)



J. Xaman †

National Center for Research and Technological Development Department of Mechanical Engineering, Cuernavaca, Morelos, Mexico



Na Zhang

Chinese Academy of Sciences, Beijing, China

[> View full biography](#)



Fengqi Zhou

Shanghai Academy of Social Sciences, Shanghai, China

Term ending 2025



Mohammad Ahmad Al-Nimr

Jordan University of Science and Technology Department of Mechanical Engineering, Irbid, Jordan

[> View full biography](#)



Beng Wah Ang

National University of Singapore, Singapore, Singapore

[> View full biography](#)



### Kathleen Bernardo Aviso

De La Salle University, Manila, Philippines

[> View full biography](#)



### Giorgio Besagni

Polytechnic of Milan Department of Energy, Milano, Italy

[> View full biography](#)



### Monica Carvalho

Paraiba Federal University, JOAO PESSOA, Brazil

[> View full biography](#)

### Silvio De Oliveira, Jr

University of São Paulo, São Paulo, Brazil

[> View full biography](#)



### Daniel Favrat

Federal Polytechnic School of Lausanne, Lausanne, Switzerland

[> View full biography](#)



### Aleksandar Georgiev

University of Telecommunications and Posts, Sofia, Bulgaria

[> View full biography](#)



### Simon Harvey

Chalmers University of Technology, Göteborg, Sweden

[> View full biography](#)



**Sotirios Karellas**

National Technical University Of Athens Laboratory of Steam Boilers and Thermal Plants, Zografou, Greece

[> View full biography](#)



**Zygmunt Kolenda**

AGH University of Krakow, Krakow, Poland



**Tyrone Lin**

National Dong Hwa University, Shoufeng, Taiwan



**Noam Lior**

University of Pennsylvania, Philadelphia, Pennsylvania, United States

[> View full biography](#)



**Lin Lu**

The Hong Kong Polytechnic University Department of Building Environment and Energy Engineering, Hong kong, Hong Kong

[> View full biography](#)



**Michael Moran**

The Ohio State University, Columbus, Ohio, United States



**Silvia Azucena Nebra**

Federal University of the ABC, SANTO ANDRE, Brazil



Younes Noorollahi

University of Tehran, Tehran, Iran (Islamic Republic of)

[> View full biography](#)



Paweł Octoń

Cracow University of Technology Faculty of Environmental Engineering and Energy, Krakow, Poland

[> View full biography](#)



Luis M. Serra

University of Zaragoza, Zaragoza, Spain

[> View full biography](#)



Arnaldo Walter

State University of Campinas School of Mechanical Engineering, CAMPINAS, Brazil



Qiuwang Wang

Xi'an Jiaotong University School of Energy and Power Engineering, Xian, China

[> View full biography](#)



Chi-Keung Woo

Kowloon Tong, Hong Kong

[> View full biography](#)



## Jinyue Yan

The Hong Kong Polytechnic University, Hong Kong, Hong Kong

[> View full biography](#)



## Ryohei Yokoyama

Osaka Metropolitan University, Osaka, Japan

[> View full biography](#)



## Peng Zhou

China University of Petroleum East China, Dongying, China

[> View full biography](#)

Term ending 2026



## Manimagalay Chetty

Cape Peninsula University of Technology - Bellville Campus, Bellville, South Africa

[> View full biography](#)



## Gianfranco Chicco

Polytechnic of Turin, Torino, Italy

[> View full biography](#)



## Abel Hernandez-Guerrero

University of Guanajuato, Guanajuato, Mexico

[> View full biography](#)



## Yunho Hwang

University of Maryland, College Park, Maryland, United States

[> View full biography](#)



**Mark Kaiser**

Louisiana State University, Baton Rouge, Louisiana, United States



**Şiir Kılıç**

Scientific and Technological Research Council of Turkey, Ankara, Türkiye

[> View full biography](#)



**Jyoti Parikh**

Integrated Research and Action for Development, New Delhi, India

[> View full biography](#)



**Roberto Schaeffer**

Federal University of Rio de Janeiro Alberto Luiz Coimbra Institute for Graduate Studies and Research in Engineering, RIO DE JANEIRO, Brazil

[> View full biography](#)



**Ram Shrestha**

Asian Institute of Technology Department of Energy Environment and Climate Change, Khlong Nueng, Thailand



**Wojciech Stanek**

Silesian University of Technology, Gliwice, Poland

[> View full biography](#)



Pascal Stouffs

University of Pau and Pays de l'Adour, Pau, France



Jesse Van Griensven Thé

University of Waterloo, Waterloo, Ontario, Canada

[> View full biography](#)



George Tsatsaronis

TU Berlin University, Berlin, Germany

[> View full biography](#)



Zhien Zhang

The Ohio State University, Columbus, Ohio, United States

[> View full biography](#)

## Assistant Editors



Géremi Gilson Dranka

Federal Technological University of Paraná, Paraná, Brazil

[> View full biography](#)



Weili Luo

Shanghai Jiao Tong University, Shanghai, China



Mette Reiche Sørensen

Aalborg University, Aalborg, Denmark



Jiayun Wang, PhD

University of Shanghai for Science and Technology, Shanghai, China

[> View full biography](#)

## Book Review Panel



Mohammad Ahmad Al-Nimr

[> View full biography](#)

John Twidell



Krzysztof Ptasinski



Ernst Worrell, PhD

[> View full biography](#)

All members of the Editorial Board have identified their affiliated institutions or organizations, along with the corresponding country or geographic region. Elsevier remains neutral with regard to any jurisdictional claims.



All content on this site: Copyright © 2025 Elsevier B.V., its licensors, and contributors. All rights are reserved, including those for text and data mining, AI training, and similar technologies. For all open access content, the relevant licensing terms apply.





# Energy

Supports open access

15.3  
CiteScore

9.0  
Impact Factor

[Submit your article ↗](#)

[Guide for authors](#)

Menu

## Volume 285

15 December 2023

[← Previous vol/issue](#)

[Next vol/issue >](#)

Receive an update when the latest issues in this journal are published

[Sign in to set up alerts](#)

### Review Article

Review article ● Full text access

**An ensemble learning framework for rooftop photovoltaic project site selection**

Yali Hou, Qunwei Wang, Tao Tan

Article 128919

[View PDF](#) Article preview

### Full Length Articles

Research article ● Full text access

**Optimization of a CHP system using a forecasting dispatch and teaching-learning-based optimization algorithm**

Ashkan Toopshekan, Ali Abedian, Arian Azizi, Esmail Ahmadi, Mohammad Amin Vaziri Rad

Article 128671

[View PDF](#) Article preview

[FEEDBACK](#)

Research article ● Full text access

## Predicting the discharge capacity of a lithium-ion battery after nail puncture using a Gaussian process regression with incremental capacity analysis

Casey Jones, Meghana Sudarshan, Vikas Tomar

Article 129364

 [View PDF](#) Article preview 

Research article ● Open access

## Economic and environmental viability of biofuel production from organic wastes: A pathway towards competitive carbon neutrality

Benteng Wu, Richen Lin, Archishman Bose, Jorge Diaz Huerta, ... Jerry D. Murphy

Article 129322

 [View PDF](#) Article preview 

Research article ● Full text access

## Considering the dual endogenous-exogenous uncertainty integrated energy multiple load short-term forecast

Yongli Wang, Huan Wang, Xiao Meng, Huanran Dong, ... Juntai Xing

Article 129387

 [View PDF](#) Article preview 

Research article ● Full text access

## Adaptive look-ahead model predictive control strategy of vehicular PEMFC thermal management

Zhaoming Liu, Guofeng Chang, Hao Yuan, Wei Tang, ... Haifeng Dai

Article 129176

 [View PDF](#) Article preview 

Research article ● Full text access

## Unleashing wastewater heat Recovery's potential in smart building systems: Grey wolf-assisted optimization aided by artificial neural networks

Tao Hai, Guangnan Zhang, Pradeep Kumar Singh, Torki Altameem, Walid El-Shafai

Article 129307

 [View PDF](#) Article preview 

Research article ● Full text access

## Estimation of the cavity volume in the gasification zone for underground coal gasification under different oxygen flow conditions

Fa-qiang Su, Xiao-long He, Meng-jia Dai, Jun-nan Yang, ... Jiao-yuan Li

Article 129309

 [View PDF](#) Article preview 

Research article ● Full text access

## Cost-reliability trade-offs for grid-connected rooftop PV in emerging economies: A case of Indonesia's urban residential households

Yusak Tanoto

Article 129388

 [View PDF](#) Article preview 

# 18-20 June 2025

Attendees can expect a comprehensive showcase of the latest innovations.



## Energy

### COUNTRY

United Kingdom

Universities and research institutions in United Kingdom

Media Ranking in United Kingdom

### SUBJECT AREA AND CATEGORY

#### Energy

- Energy Engineering and Power Technology
- Energy (miscellaneous)
- Fuel Technology
- Renewable Energy, Sustainability and the Environment

#### Engineering

- Building and Construction
- Civil and Structural Engineering
- Electrical and Electronic Engineering
- Industrial and Manufacturing Engineering
- Mechanical Engineering

#### Environmental Science

- Management, Monitoring, Policy and Law
- Pollution

#### Mathematics

- Modeling and Simulation

### PUBLISHER

Elsevier Ltd

### SJR 2024

2.211 Q1

### H-INDEX

274

| PUBLICATION TYPE | ISSN               | COVERAGE  | INFORMATION   |
|------------------|--------------------|-----------|---|
| Journals         | 03605442, 18736785 | 1976-2025 | <a href="#">Homepage</a><br><a href="#">How to publish in this journal</a><br><a href="#">Contact</a> |

SCOPE

Energy is an international, multi-disciplinary journal in energy engineering and research. The journal aims to be a leading peer-reviewed platform and an authoritative source of information for analyses, reviews and evaluations related to energy. The journal covers research in mechanical engineering and thermal sciences, with a strong focus on energy analysis, energy modelling and prediction, integrated energy systems, energy planning and energy management. The journal also welcomes papers on related topics such as energy conservation, energy efficiency, biomass and bioenergy, renewable energy, electricity supply and demand, energy storage, energy in buildings, and on economic and policy issues, provided such topics are within the context of the broader multi-disciplinary scope of Energy.











 Join the conversation about this journal


Quartiles

FIND SIMILAR JOURNALS 

|   |  |   |   |
|---|--|---|---|
| <p>1</p> <p><b>Energy Conversion and Management: X</b></p> <p>GBR</p> <p><b>68%</b></p> <p>similarity</p> | <p>2</p> <p><b>Energy Conversion and Management</b></p> <p>GBR</p> <p><b>67%</b></p> <p>similarity</p> | <p>3</p> <p><b>International Journal of Green Energy</b></p> <p>USA</p> <p><b>61%</b></p> <p>similarity</p> | <p>4</p> <p><b>Sustainable Technologie</b></p> <p>GBR</p> <p><b>6</b></p> <p>si</p> |
|---|--|---|---|

| SJR | Total Documents |
|-----|-----------------|
|     |                 |

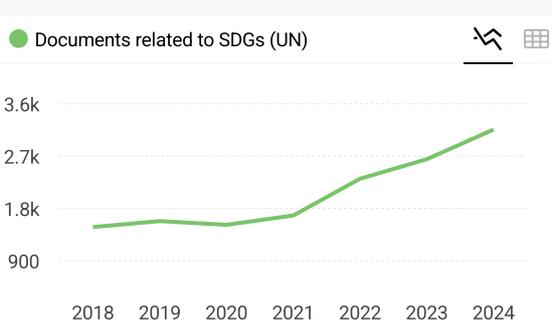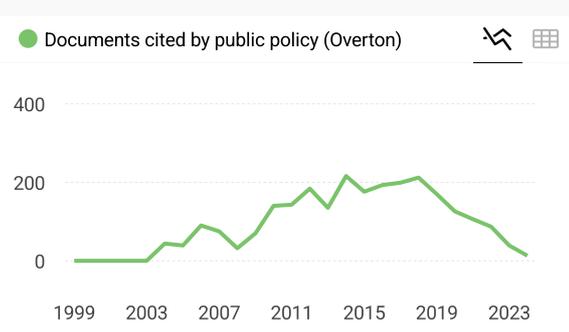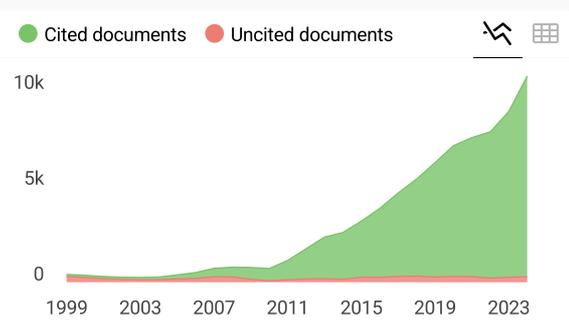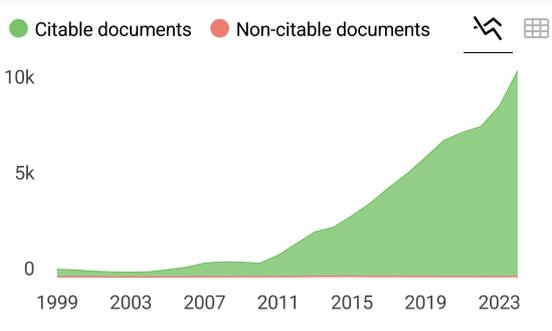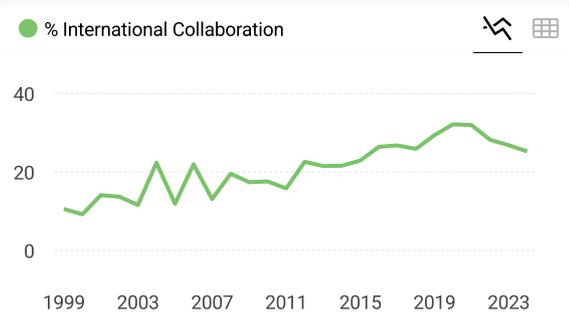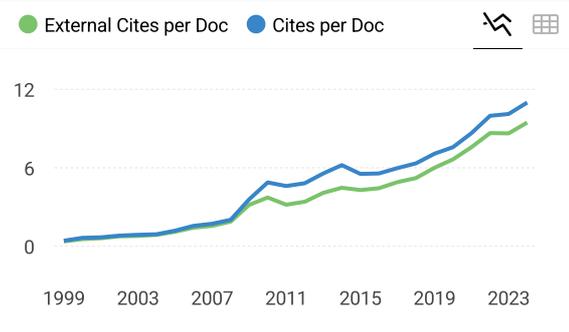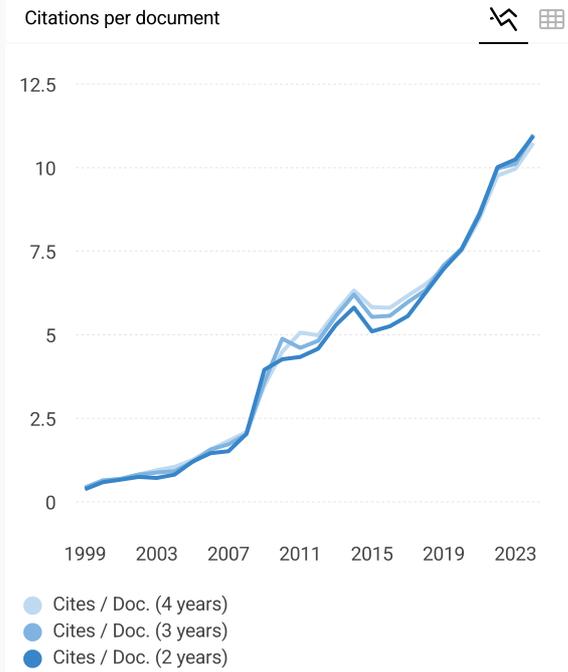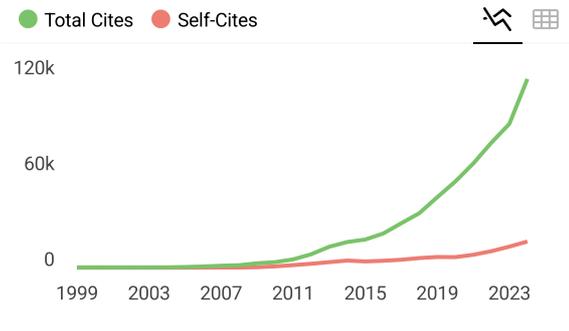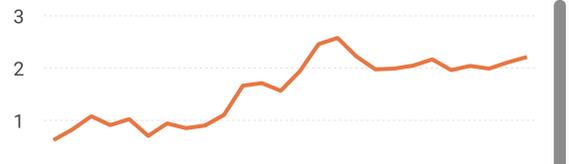

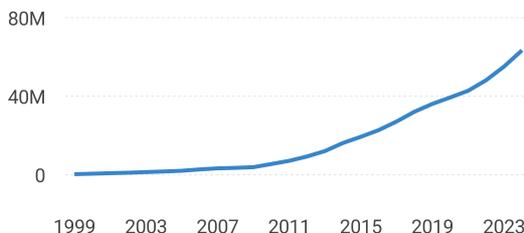

**Energy**

Q1 Building and Construction  
best quartile

SJR 2024  
2.21

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com" data-bbox="262 270 407 282">
```



**SCImago Graphica**

Explore, visually communicate and make sense of data with our **new data visualization tool.**



Metrics based on Scopus® data as of March 2025



**Tareen** 6 months ago

\*Energy journal: Waste of time and efforts ...\*

The submission process with \*Energy\* journal has been a disappointing and frustrating experience. Despite submitting a high-quality article that initially received minor revisions (with one of the two reviewers approving it outright), the journal's handling of the author addition was unprofessional.

Following their guidelines, we submitted a revision that included an author who was initially part of the manuscript team but omitted to expedite the review process. However, even though the journal allows the addition of authors at this stage, they unexpectedly rejected the submission. They neither provided a clear rationale nor engaged in any meaningful dialogue about their decision. This kind of approach, where genuine concerns and clarifications are dismissed without proper communication, is damaging not only to the authors but also to the journal's credibility. It's troubling that they chose to exercise their authority in this manner, especially when it undermines transparency and fairness. Additionally, their use of "no-reply" emails further limits any opportunity for authors to address concerns or seek clarification, making the process feel unnecessarily rigid and impersonal.

Such practices reflect poorly on the journal's commitment to academic standards and the professional treatment of contributing scholars.

← reply



**Melanie Ortiz** 6 months ago

SCImago Team

Dear Tareen, thanks for your participation! Best Regards, SCImago Team



# Source details

## Energy

Years currently covered by Scopus: from 1976 to 2025

Publisher: Elsevier

ISSN: 0360-5442 E-ISSN: 1873-6785

Subject area: Mathematics: Modeling and Simulation Engineering: Civil and Structural Engineering

Engineering: Building and Construction Engineering: Mechanical Engineering Energy: Fuel Technology

[View all](#)

Source type: Journal

[View all documents](#) >

[Set document alert](#)

[Save to source list](#)

CiteScore 2023

15.3



SJR 2023

2.110



SNIP 2023

2.052



[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

CiteScore 2023

$$15.3 = \frac{184.935 \text{ Citations } 2020 - 2023}{12.098 \text{ Documents } 2020 - 2023}$$

Calculated on 05 May, 2024

CiteScoreTracker 2024

$$16.4 = \frac{235.137 \text{ Citations to date}}{14.308 \text{ Documents to date}}$$

Last updated on 05 April, 2025 • Updated monthly

## CiteScore rank 2023

| Category                         | Rank   | Percentile |
|----------------------------------|--------|------------|
| Mathematics                      |        |            |
| Modeling and Simulation          | #6/324 | 98th       |
| Engineering                      |        |            |
| Civil and Structural Engineering | #8/379 | 98th       |

[View CiteScore methodology](#) > [CiteScore FAQ](#) > [Add CiteScore to your site](#)



# Cost-reliability trade-offs for grid-connected rooftop PV in emerging economies: A case of Indonesia's urban residential households

Yusak Tanoto

Electrical Engineering Department, Petra Christian University, Indonesia

## ARTICLE INFO

Handling Editor: Henrik Lund

### Keywords:

On-grid  
Rooftop PV  
Emerging economies  
Reliability-cost  
Trade-offs

## ABSTRACT

This study explores the potential of grid-connected rooftop photovoltaic (PV) systems in terms of how they can be better planned and utilised by understanding possible trade-offs between cost and reliability while acknowledging challenges to utility supply security in the context of emerging economies. The study particularly examines the implications of unserved energy targets, PV capacity, and billing deduction factors on grid-connected rooftop PV's trade-offs in terms of total net present cost and unserved energy. This study considers four residential household segments in Indonesia's urban area as a case study, with four cases applied in each segment representing scenarios on PV capacities and billing deduction factors. Using HOMER software, the analyses highlight the role of cost components in trade-offs involving potential PV capacity cases. Systems with maximum PV capacity exhibit cheaper total net present costs than those of half PV capacity within the same unserved energy. While the optimisations pushed PV capacity up to the maximum size across all unserved energies, higher unserved energy resulted in lower grid capacity required to meet demand associated with the system's maximum unserved energy limit. This study provides residential customers and stakeholders with insights to better plan and implement grid-connected rooftop PV systems and policies.

## Credit author statement

Yusak Tanoto: Conceptualisation, Methodology, Data preparation, Simulation, Formal analysis, Visualisation, Writing – original draft, Writing – review & editing.

## 1. Introduction

The utilisation of solar photovoltaic (PV) systems has increased significantly in recent years, with global capacity growth reaching 1.2 TW by 2022 [1–3]. In several emerging economies and jurisdictions, the installation of rooftop solar PV has witnessed significant growth [4–8]. Grid-connected rooftop PV is a feasible option for providing electricity in residential households in many urban areas [9]. Installing grid-connected rooftop PV is simpler, cheaper, and requires almost no maintenance compared to hybrid systems [10]. Adopting low-cost, green technologies like PV can reduce CO<sub>2</sub> emissions and support sustainable energy transition [11,12]. However, when choosing grid-connected rooftop PV, customers consider various factors, including the system's performance expectations, socio-environmental beliefs, and price-value beliefs, among others [13].

Rising electricity prices in developed countries like Australia, the Netherlands, Germany, and many others have fuelled the adoption of residential rooftop PV systems along with the growth in capacity. However, it is worth noting that rooftop PV development in emerging economies has been influenced by both economic and technical factors. Increasing electricity rates and challenges utilities face in providing a reliable power supply, particularly in urban distribution networks, have contributed to the rise of rooftop PV in these countries.

It is of importance to pay special attention to the low reliability of urban distribution networks [14]. This is particularly essential for households choosing the appropriate size of rooftop PV components. A grid-connected system without any capacity shortage, representing excellent reliability, would require a larger supply capacity to meet high peak loads during a short period. This, of course, would come at a higher cost. On the other hand, a smaller and less expensive system may meet a reasonable portion of the load while allowing for some capacity shortage.

Many studies have investigated different aspects of the techno-economic feasibility of rooftop solar PV systems in the context of emerging economies and developing countries. These studies have primarily focused on grid-connected residential applications and have used

E-mail address: [tanyusak@petra.ac.id](mailto:tanyusak@petra.ac.id).

<https://doi.org/10.1016/j.energy.2023.129388>

Received 29 April 2023; Received in revised form 21 September 2023; Accepted 16 October 2023

Available online 17 October 2023

0360-5442/© 2023 Elsevier Ltd. All rights reserved.

various techniques and tools. Some studies have concentrated on system planning through simulations, while others have evaluated the performance of installed systems, either at a single location or across several sites.

Gabr et al. [10] assessed the techno-economic feasibility of a grid-connected rooftop PV system in Egypt, considering the ongoing electricity retail prices and net-metering policy applied to three types of housing rates with different demand levels. They used HOMER (Hybrid Optimisation of Multiple Energy Resources) software [15] to measure the net present value of energy cost, payback period, and bill savings. Laib et al. [16] evaluated the performance of a grid-connected solar PV system and its energy balance in Algeria. The authors developed a Matlab-Simulink model to optimise, rationalise, and implement energy-saving approaches to evaluate the system's energy performance and balance.

Dondariya et al. [17] predicted the performance of grid-connected rooftop PV systems in Ujjain, India. The authors compared PV\*SOL [18], PVGIS [19], SolarGIS [20], and SISIFO [21] to analyse system performance in terms of energy generation, performance ratio, and solar fraction. Mohammadi et al. [22] analysed the impact of different tracking options on the potential of grid-connected PV development in Iran using RETScreen software [23]. Jesus et al. [24] proposed Solar-Energy, a new optimisation tool for the techno-economic analysis of PV microgeneration. The authors conducted a techno-economic analysis of grid-connected PV systems in Brazil, providing decision-making indicators such as net present value, modified internal rate of return, discounted payback period, and sensitivity analysis of key techno-economic parameters. In another study, Al Garni et al. [25] assessed the optimal design of grid-connected PV by considering various PV tracking systems applied in Makkah, Saudi Arabia. The authors used HOMER to examine the horizontal axis, vertical axis, and a two-axis tracking system. Earlier study by Lau et al. [26] analysed the pricing mechanism for grid-connected PV projects in the residential sector of Malaysia by evaluating the impact of component costs, feed-in tariffs, and carbon taxes using HOMER.

Duman and Güler [27] assessed the economic feasibility of 5 kW grid-connected solar PV in nine provinces of Turkey. Using HOMER, the study evaluated the discounted payback period, internal rate of return, and profitability index, and found that the system would not be feasible in two provinces under the practiced feed-in tariff. Bakhshi and Sadeh [28] examined the economic feasibility of grid-connected rooftop PV systems in Iran. They used PVsyst software [29] to estimate the annual energy generation of a 5-kW peak system in different cities. Their analysis included Net Present Value (NPV), Internal Rate of Return (IRR), payback period (PP), and Levelised Cost of Energy (LCOE), and employed a dynamic feed-in tariff strategy. Similar indicators, i.e., NPV, LCOE, IRR, and static PP and dynamic PP, were used by Xin-gang and Yi-min [30] in building a cost-benefit model to evaluate the economic performance of China's rooftop PV industry. Meanwhile, Orioli and Gangi [31] considered the effects of time variation on the PP assessment of grid-connected rooftop PV systems in Italy.

Li et al. [9] conducted a study to evaluate and compare the techno-economic performance of grid-connected rooftop PV systems and other alternatives in five climate zones in China using HOMER. The study found that grid/PV systems were the most cost-effective option among all the studied systems, and Kunming is the most economical among other regions. Tomar and Tiwari [32] discussed the feasibility of grid-connected rooftop PV for three residential households. The authors used HOMER to simulate the impact of feed-in tariffs/net metering along with a tariff-of-day policy in New Delhi, India. They concluded that systems without energy storage are technically and economically viable for decentralised households. An earlier study by Pillai et al. [33] developed an economic evaluation methodology to assess the near-term benefits of grid-connected residential PV systems in the United Kingdom and India. The authors developed a metric called 'Prosumer Electricity Unit Cost' (PEUC) and used it to examine the effects of solar input,

financial mechanisms, and demand profiles in the near-term time frame of the project.

While studies focusing on single household analysis or involving multiple sites have provided useful insights for stakeholders regarding the potential techno-economic impacts of grid-connected rooftop PV and its deployment opportunity, less explored, however, has been the impacts of setting and regulation through different unserved energy targets, PV capacity, and billing deduction factors. In particular, there has been little attention of the potential trade-offs between system reliability and costs.

This paper aims to explore the potential benefits of grid-connected rooftop PV in terms of how the systems can be better planned and utilised through understanding possible trade-offs between system reliability and cost while also recognising the challenges to utility supply security in the context of emerging economies. While system reliability and efficiency of residential rooftop PV can be enhanced by incorporating other technologies such as wind or diesel, gas, and energy storage [34], this paper focuses on the grid-connected PV systems in urban households in emerging economies. In particular, this study suggests a method for incorporating billing deduction factors in HOMER optimisation while taking into account the implications of setting and regulation through different unserved energy targets, PV capacity, and billing deduction factors on the assessment of cost-reliability trade-offs. The city of Surabaya, Indonesia, is considered a case study.

Despite high-level supportive legislation, rooftop PV has only seen modest deployment in Indonesia mainly due to non-technical barriers and challenges, such as missing permits, lack of regulatory certainty, lack of alignment and synchronisation of implementing regulations, project bankability issues, and cost burden for PLN (Perusahaan Listrik Negara, i.e., Indonesia's state-owned electricity company that is solely responsible for electricity generation, transmission, and distribution) as the sole off-taker, among others [35–37].

On the customer side, on the other hand, the decision regarding whether to implement grid-connected rooftop PV or rely solely on electricity from the utility grid, in many cases, has not been supported by sufficient knowledge of techno-economic aspects, particularly on reliability and cost implications due to different system settings and regulations. In addition, lack of product knowledge, complicated permit requirements, and perception of expensive systems were identified as the main barriers to adopting rooftop PV for households [38].

This paper offers a new perspective on the ongoing rooftop PV studies from a techno-economic standpoint. It introduces the concept of reliability-cost trade-offs that may arise due to different energy targets and the resulting variations in PV system sizes. These trade-offs are particularly relevant in emerging economies given the level of reliability and associated costs can vary significantly. The paper models unserved energy targets by accounting for potential capacity shortages on the supply side.

The paper is organised as follows. Section 2 provides a brief overview of the current status of solar PV deployment, with a focus on rooftop solar PV systems in Indonesia. Section 3 explains methods used in this study, including an overview of the simulations, input data, and modelling assumptions. Results and discussions are presented in Section 4. Finally, the conclusion of the paper is presented in Section 5.

## 2. Brief status of rooftop solar PV deployment for residential households in Indonesia

The potential for rooftop solar PV systems in Indonesia is immense due to the country's vast solar irradiation coverage and large market [39]. Despite this, the development of residential rooftop PV systems has been slow. As of October 2022, 75 % of the 6,261 PLN customers who installed rooftop PV were residential customers with mostly on-grid systems [40]. The residential sector has installed rooftop PV with a total capacity of 15.2 MW, representing approximately 22 % of the total rooftop capacity for all PLN customers [41]. The Java-Bali area has the

largest share of the national rooftop PV capacity, accounting for around 80 % in 2021 [42].

There are challenges to the slow deployment of residential rooftop PV in Indonesia that are currently affecting all PLN customers. Some of these challenges have been acknowledged in the PLN Electricity Supply Business Plan (RUPTL) 2021–2030 [43]. These include: 1) several PLN electricity networks are currently not prepared to handle distributed renewable energy-based generation due to oversupply conditions caused by decreased demand; 2) there will be a need for PLN to add more generation plants to increase system flexibility if there is a relatively massive penetration of rooftop PV; and 3) there will be additional investment costs in generation control and forecasting, dispatch system, and grid code enforcement [44,45]. While the challenges may delay large-scale PV deployment, oversupply of system capacity, including from coal-fired power plants, can present an opportunity to provide the grid with increased flexibility [46,47].

Through the Ministry of Energy and Mineral Resources (MEMR), the Indonesian government has made efforts to encourage the implementation of rooftop solar PV. This includes the issuance of Ministerial Regulation No. 49/2018, revised by Ministerial Regulation No. 26/2021 [48]. These regulations aim to achieve a rooftop PV capacity of 3.6 GW. Although the revised regulation is seen as a positive step, especially regarding the recognition of 100 % export of electricity back to the PLN grid, implementation has been challenging.

As the grid operator, PLN is hesitant to approve applications for rooftop PV installations up to the maximum allowable capacity quota per customer due to oversupply and financial issues, mainly caused by the ongoing take-or-pay scheme derived from the Power Purchase Agreement (PPA) of large quantities of coal-based electricity from Independent Power Producers (IPP). To address the situation, MEMR has consulted with stakeholders to discuss various options, focusing on revising Ministerial Regulation No. 26/2021. Due to the current oversupply situation, rooftop PV users will most likely not be allowed to export electricity to the PLN grid, according to the newly revised regulation that has yet to be published [49].

Despite the positive efforts on the regulatory framework, the ongoing 35 GW coal power plant mega-project started in 2015 has become a problem for Indonesia's energy transition. The unchanging plans for additional coal power plants, which are not yet built, are arguably seen as one of the main barriers that hinder the massive development of PV, including rooftop systems – that require a comprehensive solution. While the share of coal in electricity generation is expected to decrease from around 56 GW–40 GW, the capacity of coal-fired power plants is proposed to increase by 13 GW in the RUPTL 2021–2030. It has come to light that there are still plans to construct coal power plants in 2027, as per the 2015–2019 PPA [50].

### 3. Methods

In this study, HOMER software is used to model grid-connected rooftop solar PV systems. Possible system sizes with various load profiles are simulated, as are their economic parameters, such as total Net Present Cost (NPC) and Cost of Energy (COE). Four different daily load profiles for residential households with electricity contracts of 2,200 V-Ampere (VA), 3,500 VA, 5,500 VA, as well as 6,600 VA have been created. Fig. 1 depicts these load profiles.

While a preliminary survey has been carried out to obtain the load profiles (as shown in Fig. 1) owned by different households in different locations in Surabaya – to represent different residential customer segments – this study considers only one location to allow the same solar irradiation data to be used in all simulations. It should be noted that all load profiles surveyed, as shown in Fig. 1, are for weekdays. Nevertheless, weekend patterns for most residential segments show similar base load values to weekdays but have slightly higher peak load, over a short period, than weekdays. One thing to note is that the surveyed load profiles have ruled out the impact of the Covid-19 pandemic which has

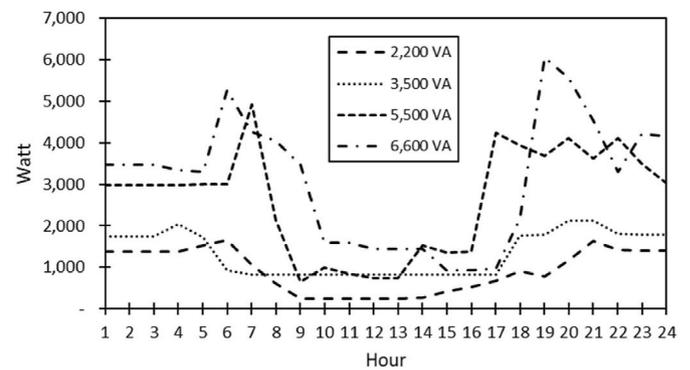


Fig. 1. Surveyed hourly based daily load profile for four residential households.

recently subsided, where people spent more time at home due to restrictions on outdoor activities or working from home.

Meanwhile, Table 1 shows several loading parameters for all residential segments, including the base load, maximum (peak) load, demand factor, and load factor. The demand factor is defined as the maximum demand divided by the connected load. The load factor is the ratio of average to maximum load for a 24-h period.

As shown in Table 1, the surveyed households have a fairly low to medium range of demand factors and relatively low load factors, i.e., around 0.5–0.6. This, however, is a typical household situation in many Indonesian urban areas, including Surabaya. Between 7 a.m. and 4 p.m., demand for electricity falls because most people spend their days outside their homes studying or working. Furthermore, with the exception of refrigerators, electricity has not been used for kitchen appliances. While gas is commonly used in stoves and ovens, microwaves are uncommon in Indonesia.

#### 3.1. Solar resource data

Surabaya has huge untapped potential for rooftop PV. Located on the east coast of the Java Sea, Surabaya is Indonesia's second-largest urban area of around 300 km<sup>2</sup> and has relatively high solar resources. According to a World Bank report that selected a geographical site of  $-7.32^{\circ}$  ( $7^{\circ}19'$ ) South Latitude and  $112.68^{\circ}$  ( $112^{\circ}40'$ ) East Longitude, the long-term average daily Global Horizontal Irradiation (GHI) in Surabaya has reached 5.29 kWh/m<sup>2</sup> [29], higher than Indonesia's average daily GHI of 4.8 kWh/m<sup>2</sup>. Fig. 2 presents the map of daily and yearly long-term averages of GHI values in Indonesia, including Surabaya, from 1999 to 2018 [51].

HOMER allows users to enter GHI and/or Clearness Index [52] values using one of the two possible approaches, i.e., by downloading GHI and/or Clearness Index values from HOMER or by obtaining the NASA/MERRA2 hourly-based datasets of GHI and/or Clearness Index from the NREL National Solar Radiation Database (NSRDB) viewer [53]. While the first approach allows users to directly obtain 'ready to use' monthly average values of GHI and/or Clearness Index by specifying the location's latitude and longitude, the second approach lets users explore the data using the following steps: (1) entering the location's latitude and longitude; (2) selecting available datasets; (3) selecting appropriate

Table 1  
Loading parameters for all surveyed residential households.

| Parameter     | Residential household segments |            |            |            |
|---------------|--------------------------------|------------|------------|------------|
|               | 2,200 VA                       | 3,500 VA   | 5,500 VA   | 6,600 VA   |
| Base load     | 240 Watt                       | 820 Watt   | 657 Watt   | 935 Watt   |
| Maximum load  | 1,655 Watt                     | 2,127 Watt | 4,915 Watt | 6,056 Watt |
| Demand factor | 0.53                           | 0.32       | 0.48       | 0.43       |
| Load factor   | 0.56                           | 0.63       | 0.53       | 0.51       |

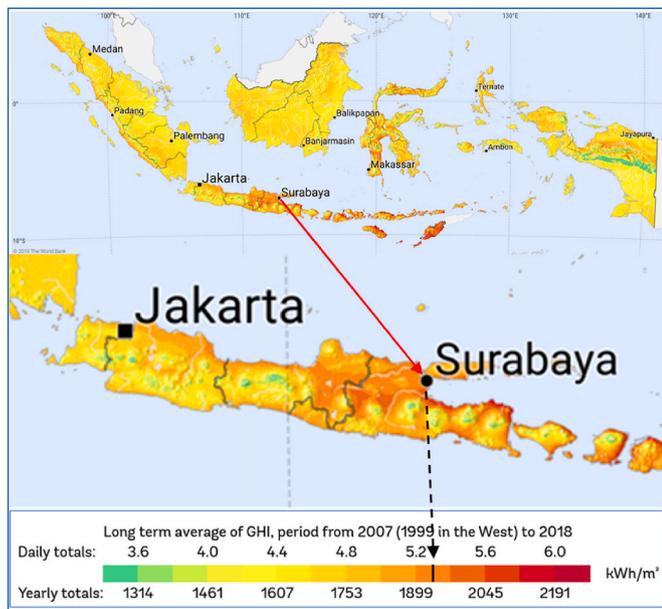


Fig. 2. A map showing daily and yearly long-term average GHI (kWh/m<sup>2</sup>) in Indonesia and Surabaya [51].

attributes; (4) selecting year(s); (5) selecting time interval of the data; (6) selecting data formatting options; (7) typing an email for receiving the data; and (8) submitting the request.

While obtaining the GHI and/or Clearness Index data from the NREL NSRDB data viewer website may provide users with flexibility and options of getting the preferred data granularity (10-min, 30-min, or 60-min time intervals for Asia, Australia, and Pacific regions during 2016–2020), HOMER detects the time step of the imported data file based on the number of lines. If, for example, the imported data file contains 8,760 lines, HOMER assumes it contains hourly data. Subsequently, HOMER will convert the data into monthly averages, i.e., a single value for each month. Users, however, should first convert the GHI from hourly-based W/m<sup>2</sup> into daily-based kW/m<sup>2</sup> for a particular year before importing the data into HOMER. In addition, if the year selected on the NREL data viewer website is more than one specific year, users must produce an average value for each time step within all considered years.

This study applies the first approach, i.e., downloading the ‘ready to use’ GHI and Clearness Index data for a location having a South Latitude of 7°19’ and an East longitude of 112°47’. While the considered latitude in this study is slightly different from that in Ref. [51], the location provides an average daily GHI of 5.26 kWh/m<sup>2</sup>, similar to that in Ref. [51]. Table 2 presents numerical values of the monthly average GHI, and Clearness Index obtained for this study, while Fig. 3 shows how

Table 2  
Monthly average GHI and clearness index for the specified location.

| Month     | Clearness index | Global Horizontal Index (kWh/m <sup>2</sup> /day) |
|-----------|-----------------|---|
| January   | 0.45            | 4.84  |
| February  | 0.46            | 4.97  |
| March     | 0.48            | 5.05  |
| April     | 0.52            | 5.09  |
| May       | 0.56            | 5.00  |
| June      | 0.57            | 4.82  |
| July      | 0.59            | 5.10  |
| August    | 0.60            | 5.62  |
| September | 0.61            | 6.21  |
| October   | 0.56            | 5.96  |
| November  | 0.50            | 5.34  |
| December  | 0.48            | 5.13  |
| Average   | 0.53            | 5.26  |

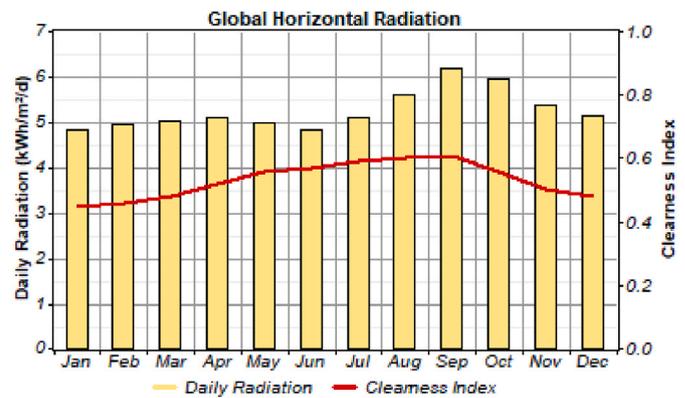


Fig. 3. HOMER visualisation of monthly average GHI and Clearness Index for the specified location.

HOMER depicts the values graphically.

### 3.2. Reliability-cost trade-offs

The cost-reliability trade-offs in the context of residential grid-connected rooftop PV analysis should demonstrate to customers the importance of understanding the options available and their possible two-sided impacts. This impact may be caused by different PV sizes that customers may consider due to budget or other constraints, such as daytime power requirements and supply reliability. In contrast to the load profiles of commercial buildings in general, which have relatively flat loads during the day, the load profiles for all surveyed households, as shown in Fig. 1, can provide more options to all customers, particularly considering the shape of a deep valley from 7 a.m.–4 p.m. However, there are different consequences for installing any PV size that suits their needs and limitations, not just only maximising the size allowed by regulations up to the contracted amount of power.

The cost-reliability trade-off analysis in this study is based on the maximum annual capacity shortage values assigned to the simulation. HOMER uses the term ‘maximum annual capacity shortage’ to express the system’s reliability constraint. It defines the total capacity shortage as the total amount of capacity shortage throughout a year, expressed in kWh/year. The value is used to calculate the capacity shortage fraction. This fraction is a ratio between total capacity shortage and total electric load, expressed in kWh/year. The simulated systems may end up with a situation where there is an unmet load or unserved energy when the electrical load exceeds the supply. Therefore, the total unmet load and the unmet load fraction can be calculated accordingly. This study applies 0 %, 5 %, 10 %, and 15 % of the maximum annual capacity shortage (or maximum unserved energy). Hereafter, the paper uses the term ‘maximum unserved energy’ as the system reliability constraint and ‘unserved energy’ as the result of system reliability.

### 3.3. System modelling, economic parameters, and assumptions

This study assesses the grid-connected rooftop PV systems for residential households by using HOMER software to model system configurations for four residential household segments with their associated load profiles in the urban area of Surabaya, Indonesia, as a case study. The complete model consists of an electricity grid, the household’s loading pattern, and the main components consist of PV array and converter. While much of the simulations are performed in HOMER, this study takes into account the implications of setting and regulation through different unserved energy targets, PV capacity, and billing deduction factors on the assessment of cost-reliability trade-offs.

In particular, this study suggests a method for incorporating billing deduction factors in HOMER optimisation since the software does not account for billing deduction cases in its direct calculations. In HOMER,

varying sell-back rates for energy sold to the grid can be used to account for various billing deduction factors. To simulate a billing deduction factor of 65 %, for instance, the model multiplies the amount of electricity sold to the grid by 65 % of the electricity full rate for customers.

This study examines four load profiles corresponding to the four residential customer segments. Simulations are performed for each load profile, considering the electricity export deduction factor. The applicable kWh export deduction factor determines the proportion of kWh exported to the grid that can be used as a factor for reducing electricity bills. This study uses two different billing deduction factors, i.e., a 65 % deduction factor according to Ministerial Regulation No. 49/2018 and a 100 % deduction factor according to Ministerial Regulation No. 26/2021. The first deduction factor shows that only 65 % of the kWh exported to the grid is permissible for customers to reduce electricity bills. The second factor indicates that the customer can use all kWh exported to the grid to reduce the amount of kWh purchased from the grid.

In HOMER, these two conditions can be treated differently. HOMER calculates the total energy charge without net metering, i.e., using the 65 % deduction factor, by multiplying the total energy purchased from the grid by the electricity rate applicable to that household segment minus the amount of electricity sold to the grid times the applicable sell-back rate. Using a 100 % deduction factor (net metering), HOMER calculates the total energy charge by multiplying the amount of net kWh purchased from the grid by the electricity rate that applies to the household segment.

No Time-of-Use (TOU) rate and demand charge is applied to Indonesian residential sector customers. The electricity rate for households with a 2,200 VA power contract (R1) is IDR 1,444.70 per kWh, while households with power of 3,500 VA or above (R2/R3) are charged IDR 1,699.53 per kWh [ 54,55]. Assuming the exchange rate is IDR 15,000 per USD 1, this gives us USD 0.096 per kWh for 2,200 VA customers and USD 0.113 per kWh for 3,500–6,600 VA ones. The simulation, therefore, applies different electricity rates between 2,200 VA and higher segments.

The simulation also accounts for demand uncertainty by allowing for up to 5 % day-to-day variability, i.e., the standard deviation in the sequence of daily averages, and up to 5 % time-step-to-time-step variability, i.e., the standard deviation in the difference between the hourly data and the average daily profile, depending on the contract. This configuration results in a higher peak load than the surveyed households have. For example, a 2,200 VA household with 22 kWh/day and a peak load of 1.65 kW is simulated to have a peak load of 2.1 kW due to the 5 % day-to-day and time-step-to-time-step variability. Aside from that, electricity demand is assumed to remain constant over the PV's lifetime. The complete system configuration models for all households in HOMER is illustrated in Fig. 4.

3.3.1. Solar PV array and converter

Since the effect of temperature on the PV array is not considered, HOMER calculates the power output generated by the solar PV array  $P_{PV}$  according to the following equation.

$$P_{PV} = Y_{PV} \times f_{PV} \left( \frac{G_T}{G_{T,STC}} \right) \tag{1}$$

where  $Y_{PV}$  is the rated capacity of the PV array (kW),  $f_{PV}$  is the derating factor (%),  $G_T$  is the solar radiation incident on the PV array in the current time step (kW/m<sup>2</sup>), and  $G_{T,STC}$  is the incident radiation at standard test condition (1 kW/m<sup>2</sup>).

In HOMER, the rated capacity of the PV array  $Y_{PV}$  is specified by users as one of the input variables to Eq. (1). Users can either enter at least one size of solar PV module and the capital cost associated with that particular size, for example, 2 kW, or in fractions, for example, 0.1 kW PV. If the second option were selected, the user must enter several PV module capacities in multiples of 0.1 kW–2 kW or up to the maximum capacity considered. HOMER simulates possible supply configurations to meet hourly-based energy demand and displays the system's  $Y_{PV}$  in the simulation results. Therefore, if users enter  $Y_{PV}$  as fractions, the number of solar PV arrays  $N_{PV}$  can be obtained using the following equation.

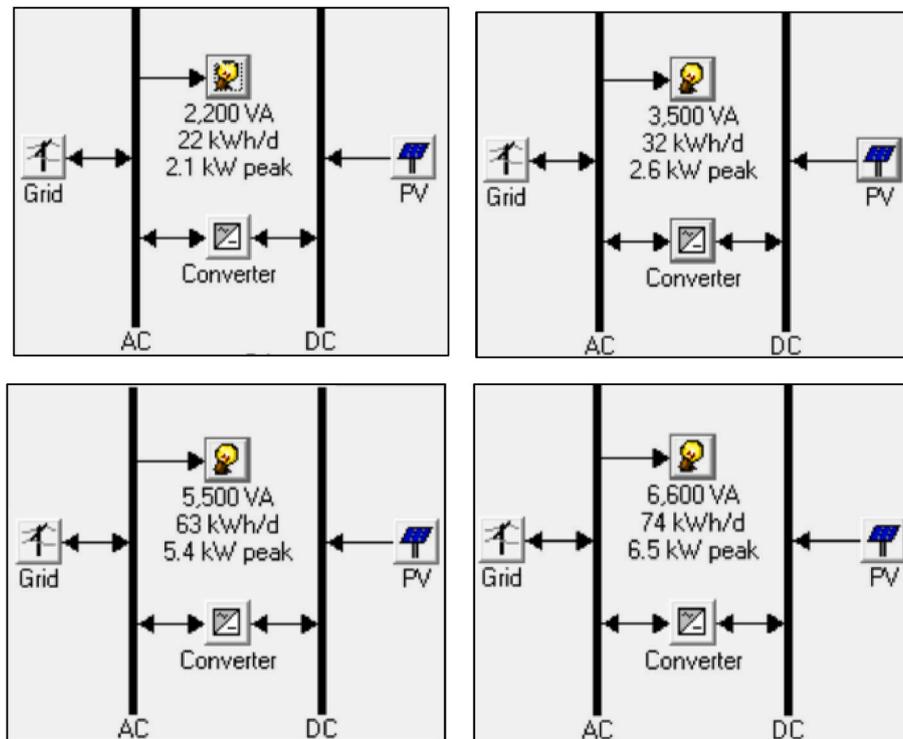


Fig. 4. HOMER system configurations for residential households with 2,200 VA and 3,500 VA (top left to right), households with 5,500 VA and 6,600 VA (down left to right) electricity contracts.

$$N_{PV} = \frac{calc\_Y_{PV}}{frac\_Y_{PV}} \quad (2)$$

where  $calc\_Y_{PV}$  is the calculated system's rated capacity of the PV array (kW), and  $frac\_Y_{PV}$  is the fraction of the rated capacity of the PV entered by users (kW).

HOMER models a converter, or better known as an inverter, to convert DC electricity generated by solar PV arrays to AC electricity by considering the user-specified efficiency  $\eta$  of the inverter side. HOMER calculates the performance of a converter on an annual basis according to the following equation.

$$\eta = \frac{kWh/year_{in}}{kWh/year_{out}} \quad (3)$$

where  $kWh/year_{in}$  is the DC electricity generated by PV arrays (kWh/year), and  $kWh/year_{out}$  is the AC electricity produced by inverter (kWh/year).

The expected converter life is 15 years, with 90 % efficiency on the inverter side and 85 % efficiency on the rectifier side. The converter-rated capacity candidates can be slightly higher than the solar PV capacity specified in the simulation search space, as HOMER does not consider the power factor of the load. Capital and replacement costs of the 1 kW converter are assumed to be USD 400 (IDR 6,000,000) [56] and USD 380 (IDR 5,700,000), respectively, without annual O&M costs. Capital and replacement costs are assumed to increase linearly concerning size.

This study assumes capital and replacement costs for the 0.1 kW peak PV module in Indonesia to be USD 50 each (equal to around IDR 750,000) [57], and no annual Operating and Maintenance (O&M) costs for the PV arrays. The cost of additional or replacement modules is assumed to increase linearly. The derating factor is considered 80 %, and the ground reflectance is supposed to be 20 %. Given an expected lifetime of 25 years, the PV arrays are installed without tracking. The slope is specified in the same degree as the location's latitude, 7.3°, while the azimuth is set at 180° (due North).

### 3.3.2. System economic

This study considers a project lifetime of 25 years and assumes an annual interest rate of 5 %. Other important assumptions include system fixed capital cost and system fixed O&M cost. Considering the current total installed cost of solar PV for the Indonesian residential sector, i.e., USD 1,000/kW peak (IDR 15,000,000/kW peak) [ [58,59]], and the cost of solar PV modules and converters, the system fixed capital cost and the fixed O&M cost are set at USD 200 (IDR 3,000,000) [60] and USD 20/year (IDR 300,000/year), respectively.

In HOMER, the economic feasibility of the systems can be assessed by using total Net Present Cost (total NPC), Cost of Energy (COE), and operating costs. The total NPC, expressed in USD, is used in economic analysis to show the system's life cycle cost. It is calculated as follows.

$$C_{NPC} = \frac{C_{ann,tot}}{CRF(i, R_{proj})} \quad (4)$$

$$CRF(i, N) = \frac{i(1+i)^N}{(1+i)^N - 1} \quad (5)$$

where  $C_{ann,tot}$  is total annualised cost (USD/year),  $CRF$  is capital recovery factor,  $i$  is interest rate (%), and  $R_{proj}$  is project lifetime (year).

HOMER defines COE as the average cost per kWh produced by the system. It is calculated by dividing the total annualised cost by the total electricity produced including total grid sales as follows.

$$COE = \frac{C_{ann,tot}}{E_{prim,AC} + E_{grid,sales}} \quad (6)$$

where  $E_{prim,AC}$  the total electricity produced by all components of the

system in a year, and  $E_{grid,sales}$  is the total grid sales (electricity sold to the grid).

Operating costs, expressed in USD/year, are the sum of the annual O&M costs, and annualised replacement cost minus annualised salvage value. For grid-connected systems, it includes the annualised cost of electricity purchased from the grid minus electricity sold to the grid. While the term operating costs is useful in providing the user with some insights into the contribution of these types of costs on the total NPC and typically decreases at higher unserved energy, this study rules out the term operating costs in the analysis due to the focus of this study on analysing the possible trade-off between the system cost, which is already well represented by the total NPC, and unserved energy.

### 3.3.3. Scenarios and cases

This study considers two main scenarios in the simulation regarding the selection of solar PV-size candidates. The first scenario is called Maximum-PV-Capacity (MPVC). This basically refers to the maximum PV capacity a customer can install, i.e., up to the power (VA) contracted by a household, as per Ministerial Regulation No. 26/2021. For example, a household with 2,200 VA contracted power can install PV panels up to 2.2 kW peak capacity. In this case, the simulation considers up to 2.2 kW peak PV capacity in 0.1 kW PV arrays. This scenario considers PV sizes of up to 3.5 kW peak, 5.5 kW peak, and 6.6 kW peak for households with 3,500 VA, 5,500 VA, and 6,600 VA, respectively. HOMER simulates these size candidates and the fraction of electricity purchased from the grid. The optimisation will result in a system configuration with the least total NPC and other alternatives that exhibit higher total NPC.

The second scenario is called Half-PV-Capacity (HPVC). Under this scenario, simulations use up to half the maximum allowable PV capacity. For example, simulations for possible system configurations for a 2,200 VA household consider up to 1.1 kW peak capacity in 0.1 kW PV arrays. Other simulations for households with 3,500 VA, 5,500 VA, and 6,600 VA are carried out considering PV capacity of up to 1.75 kW peak, 2.75 kW peak, and 3.3 kW peak, respectively. This scenario is based on the low load during the day for all households, i.e., between 7 a.m. and 4 p.m. This study assesses the total NPC from both MPVC and HPVC scenarios for all household segments.

This study considers up to four cases for each household segment, i.e., 100%-MPVC, 100%-HPVC, 65%-MPVC, and 65%-HPVC. In this regard, either 100 % or 65 % refer to the applicable deduction factor according to the regulations mentioned earlier in Section 2. In other words, there are two cases for each scenario. The MPVC scenario consists of 100%-MPVC and 65%-MPVC, while the HPVC scenario consists of 100%-HPVC and 65%-HPVC.

## 4. Results and discussion

Tables 3-6 highlight the main results regarding important techno-economic aspects for all the cases considered in a 2,200 VA household. In the 100%-MPVC cases (see Table 3), the total NPC has reached USD 9,175 for 0 % maximum unserved energy (no-unserved energy) and has declined to USD 7,987 or 13 % for up to 11 % simulated unserved energy. As for no-unserved energy, the total NPC has increased to USD 10,031, USD 10,371, and USD 10,661 for the 65%-MPVC (see Table 4), 100%-HPVC (see Table 5), and 65%-HPVC cases (see Table 6), respectively.

All the total NPC of 100%-MPVC is found to be the cheapest among other cases considering all unserved energy. From the simulations, it is revealed that the total NPC of 100%-MPVC with no-unserved energy is USD 9,175, cheaper than the total NPC of 65%-MPVC with 7 % unserved energy and of HPVC cases with 11 % unserved energy. The simulation results have implied potential benefits of rooftop PV installation up to the maximum permitted capacity and concerning a 100 % billing deduction scheme for households with 2,200 VA, considering different options regarding unserved energy, installed capacity, and percentage of

**Table 3**  
Simulation results for 2,200 VA: 100%-MPVC.

| Maximum annual unserved energy (%) | PV (kW) | Converter (kW) | Grid (kW) | Initial Capital (USD) | Total NPC (USD) | COE (USD/kWh) | RE share (%) | Unserved energy (%) |
|------------------------------------|---------|----------------|-----------|-----------------------|-----------------|---------------|--------------|---------------------|
| 0                                  | 2.2     | 1.5            | 1.8       | 1,900                 | 9,175           | 0.081         | 33           | 0                   |
| 5                                  | 2.2     | 1.5            | 1.4       | 1,900                 | 8,796           | 0.081         | 34           | 4                   |
| 10                                 | 2.2     | 1.5            | 1.3       | 1,900                 | 8,446           | 0.080         | 35           | 7                   |
| 15                                 | 2.2     | 1.5            | 1.2       | 1,900                 | 7,987           | 0.079         | 36           | 11                  |

**Table 4**  
Simulation results for 2,200 VA: 65%-MPVC.

| Maximum annual unserved energy (%) | PV (kW) | Converter (kW) | Grid (kW) | Initial Capital (USD) | Total NPC (USD) | COE (USD/kWh) | RE share (%) | Unserved energy (%) |
|------------------------------------|---------|----------------|-----------|-----------------------|-----------------|---------------|--------------|---------------------|
| 0                                  | 2.2     | 1.5            | 1.8       | 1,900                 | 10,031          | 0.089         | 33           | 0                   |
| 5                                  | 2.2     | 1.5            | 1.4       | 1,900                 | 9,652           | 0.088         | 34           | 4                   |
| 10                                 | 2.2     | 1.5            | 1.3       | 1,900                 | 9,302           | 0.088         | 35           | 7                   |
| 15                                 | 2.2     | 1.5            | 1.2       | 1,900                 | 8,842           | 0.088         | 36           | 11                  |

**Table 5**  
Simulation results for 2,200 VA: 100%-HPVC.

| Maximum annual unserved energy (%) | PV (kW) | Converter (kW) | Grid (kW) | Initial Capital (USD) | Total NPC (USD) | COE (USD/kWh) | RE share (%) | Unserved energy (%) |
|------------------------------------|---------|----------------|-----------|-----------------------|-----------------|---------------|--------------|---------------------|
| 0                                  | 1.1     | 1.0            | 1.8       | 1,150                 | 10,371          | 0.092         | 19           | 0                   |
| 5                                  | 1.1     | 1.0            | 1.4       | 1,150                 | 9,987           | 0.092         | 20           | 4                   |
| 10                                 | 1.1     | 1.0            | 1.3       | 1,150                 | 9,636           | 0.091         | 21           | 7                   |
| 15                                 | 1.1     | 1.0            | 1.2       | 1,150                 | 9,177           | 0.091         | 21           | 11                  |

billing deduction.

As shown in [Table 3](#) to [Table 6](#), renewable energy's contribution to electricity generation has reached 33–36 % share in the cases of MPVC and 19–21 % share in the cases of HPVC within the range of 11 % unserved energy. As expected, reducing the installed capacity of PV modules to half the maximum allowable capacity will decrease PV penetration in the systems.

The optimisation results presented in [Table 3](#) to [Table 6](#) also provide customers with another insight into the potential role of the system cost components in shaping the cost-reliability trade-off. While the initial capital costs are of course found to be lower in HPVC cases compared to those in MPVC due to less PV array involved, i.e., USD 1,150 versus USD 1,900, it is found that the total NPC of MPVC cases are found to be cheaper than those of HPVC cases within the same unserved energy.

From the simulation results in 100%-MPVC cases, for example, it is found that 4 % unserved energy is equal to 283 kWh/year of unmet electricity, while 7 % and 11 % unserved energies are equal to 542 kWh/year and 881 kWh/year, respectively. On the other hand, the total NPC of this particular case has shown a noticeable decrease of around USD 350 – USD 450 for every 3–4% additional unserved energy.

[Tables 7–10](#) shows the trade-offs between the total NPC, as expressed in annual total cost (USD/year), and unserved energy (kWh/year) of all simulations for a 2,200 VA household. The optimisation results show cheaper total annual costs as unserved energy increases. In addition, MPVC cases have shown more affordable yearly costs due to fewer energy charges (electricity bills) spent by the customers compared to those

**Table 6**  
Simulation results for 2,200 VA: 65%-HPVC.

| Maximum annual unserved energy (%) | PV (kW) | Converter (kW) | Grid (kW) | Initial Capital (USD) | Total NPC (USD) | COE (USD/kWh) | RE share (%) | Unserved energy (%) |
|------------------------------------|---------|----------------|-----------|-----------------------|-----------------|---------------|--------------|---------------------|
| 0                                  | 1.1     | 1.0            | 1.8       | 1,150                 | 10,661          | 0.094         | 19           | 0                   |
| 5                                  | 1.1     | 1.0            | 1.4       | 1,150                 | 10,277          | 0.094         | 20           | 4                   |
| 10                                 | 1.1     | 1.0            | 1.3       | 1,150                 | 9,926           | 0.094         | 21           | 7                   |
| 15                                 | 1.1     | 1.0            | 1.2       | 1,150                 | 9,467           | 0.094         | 21           | 11                  |

of HPVC.

It is of importance to observe the simulation results in terms of a range of shares of energy charge to the total (annual) cost of the systems. As presented in [Table 7](#) to [Table 10](#), all optimisation results in MPVC cases have shown lower shares of energy charge to the (annual) total cost compared to those in HPVC ones. It is found that the averaged shares of energy charge to the total cost are 70 % and 74.6 % for 100%-MPVC and 65%-MPVC, respectively, versus 83.9 % and 84.3 for 100%-HPVC and 65%-HPVC, respectively.

As the finding compares MPVC and HPVC scenarios, it highlights the potential benefits of higher PV penetrations in reducing the energy charge component's share of the total annual cost within the same unserved energy range. In this regard, the lower applicable billing deduction factor indicates the smaller revenue that a customer can expect within the same scenario, which, of course, has an impact on the higher portion of energy charge in the total annual cost. While this paper highlights particular results for a 2,200 VA surveyed household, similar implications as obtained in [Table 7](#) are also expected to occur for other households considered in this study, given the similarity of the households' daily load profiles.

[Figs. 5 and 6](#) depict the cost-reliability trade-offs in terms of total NPC versus unserved energy for all cases in 2,200 VA and 3,500 VA, as well as 5,500 VA and 6,600 VA households, respectively. From the simulation results presented in [Figs. 5 and 6](#), the total NPC of 100%-MPVC cases is the cheapest in every unserved energy. The finding indicates a comparative benefit of on-grid rooftop PV systems installing

**Table 7**  
Trade-offs between annualised total cost and unmet energy for a 2,200 VA household.

| Scenario  | Unservd energy (%) | Unmet energy (kWh/year) | Annual energy charge (USD/year) | Annualised total cost (USD/year) | Share of energy charge to total cost (%) | Averaged share of energy charge to total cost (%) |
|-----------|--------------------|-------------------------|---------------------------------|----------------------------------|--|---|
| 100%-MPVC | 0                  | 0                       | 481                             | 651                              | 73.8                                     | 70  |
|           | 4                  | 283                     | 454                             | 624                              | 72.8                                     |   |
|           | 7                  | 542                     | 429                             | 599                              | 71.6                                     |   |
|           | 11                 | 881                     | 396                             | 567                              | 69.8                                     |   |
| 100%-HPVC | 0                  | 0                       | 624                             | 736                              | 84.8                                     | 83.9  |
|           | 4                  | 287                     | 597                             | 709                              | 84.2                                     |   |
|           | 7                  | 546                     | 572                             | 684                              | 83.6                                     |   |
|           | 11                 | 886                     | 539                             | 651                              | 82.8                                     |   |
| 65%-MPVC  | 0                  | 0                       | 541                             | 712                              | 75.9                                     | 74.6  |
|           | 4                  | 283                     | 515                             | 685                              | 75.2                                     |   |
|           | 7                  | 542                     | 490                             | 660                              | 74.2                                     |   |
|           | 11                 | 881                     | 457                             | 627                              | 72.9                                     |   |
| 65%-HPVC  | 0                  | 0                       | 645                             | 756                              | 85.3                                     | 84.3  |
|           | 4                  | 287                     | 617                             | 729                              | 84.6                                     |   |
|           | 7                  | 546                     | 592                             | 704                              | 84.1                                     |   |
|           | 11                 | 886                     | 560                             | 672                              | 83.3                                     |   |

**Table 8**  
The cost per watt of PV installed capacity with 0 % maximum unserved energy.

| Household | The cost per watt of PV installed capacity (\$/Watt) |          |           |          |
|-----------|--|----------|-----------|----------|
|           | 100%-MPVC  | 65%-MPVC | 100%-HPVC | 65%-HPVC |
| 2,200 VA  | 4.17   | 4.56     | 9.43      | 9.69     |
| 3,500 VA  | 4.20   | 4.53     | 9.68      | 9.74     |
| 5,500 VA  | 5.55   | 5.93     | 12.34     | 12.54    |
| 6,600 VA  | 5.39   | 5.71     | 12.02     | 12.12    |

**Table 9**  
The cost per watt of PV installed capacity with 5 % maximum unserved energy.

| Household | The cost per watt of PV installed capacity (USD/Watt) |          |           |          |
|-----------|---|----------|-----------|----------|
|           | 100%-MPVC   | 65%-MPVC | 100%-HPVC | 65%-HPVC |
| 2,200 VA  | 3.99  | 4.39     | 9.08      | 9.34     |
| 3,500 VA  | 4.00  | 4.34     | 9.30      | 9.36     |
| 5,500 VA  | 5.24  | 5.62     | 11.75     | 11.95    |
| 6,600 VA  | 5.06  | 5.39     | 11.36     | 11.46    |

**Table 10**  
The cost per watt of PV installed capacity with 10 % maximum unserved energy.


| Household | The cost per watt of PV installed capacity (USD/Watt) |          |           |          |
|-----------|---|----------|-----------|----------|
|           | 100%-MPVC   | 65%-MPVC | 100%-HPVC | 65%-HPVC |
| 2,200 VA  | 3.84  | 4.23     | 8.76      | 9.02     |
| 3,500 VA  | 3.71  | 4.05     | 8.71      | 8.77     |
| 5,500 VA  | 4.91  | 5.29     | 11.11     | 11.31    |
| 6,600 VA  | 4.78  | 5.10     | 10.78     | 10.88    |

maximum PV capacity permitted combined with higher billing deduction factors (here is 100 %) over other configurations. Moreover, there is a relatively large difference in total NPC between the 100%-MPVC cases and the 65%-MPVC cases concerning all unserved energies up to a 15 % maximum annual unserved energy constraint, while insignificant differences of the total NPC are found between those in the 100%-HPVC cases and the 65%-HPVC cases, particularly in 3,500 VA and 6,600 VA households.

Residential customers can further estimate one of the important indices for rooftop PV installation decision-making, i.e., the cost per MWh consumed (USD/MWh). Using 100%-MPVC cases in a 2,200 VA household as illustrations, and given the cost is the total NPC, as presented in Fig. 9, the costs per MWh consumed during the project lifetime for 0 %, 4 %, 7 %, and 11 % unserved energies are USD 37.19/MWh, USD 36.70/MWh, USD 36.22/MWh, and USD 35.54/MWh, respectively, provided the total MWh consumed over the 25-year project lifetime are 246.68 MWh, 239.68 MWh, 233.20 MWh, and 224.73 MWh, respectively for the associated unserved energies.

From this particular analysis, it is found that, despite a considerably large difference in terms of total NPC between the system with no-unserved energy and that with the poorest reliability (USD 1,188 difference), the cost per MWh figures have shown a relatively small gap of cost difference during the project lifetime, i.e., USD 1.65/MWh, between no-unserved energy and 11 % unserved energy.

In addition to merely exploring and comparing economic parameters such as total NPC, the share of energy charge to total annual cost, and COE, it is also of interest to assess the potential economic impact of the systems in terms of cost per watt of PV installed, i.e., through exploring which households exhibit the lowest cost per watt of PV installed capacity. The cost per watt of PV installed can be used as one of the indicators for customers in deciding the capacity of PV to be installed

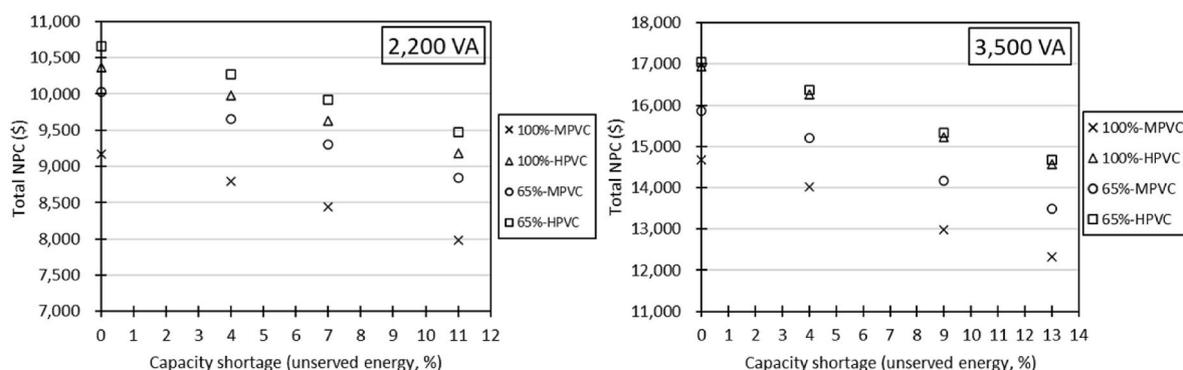

**Fig. 5.** Total NPC versus unserved energy in all cases for 2,200 VA (left) and 3,500 VA (right).

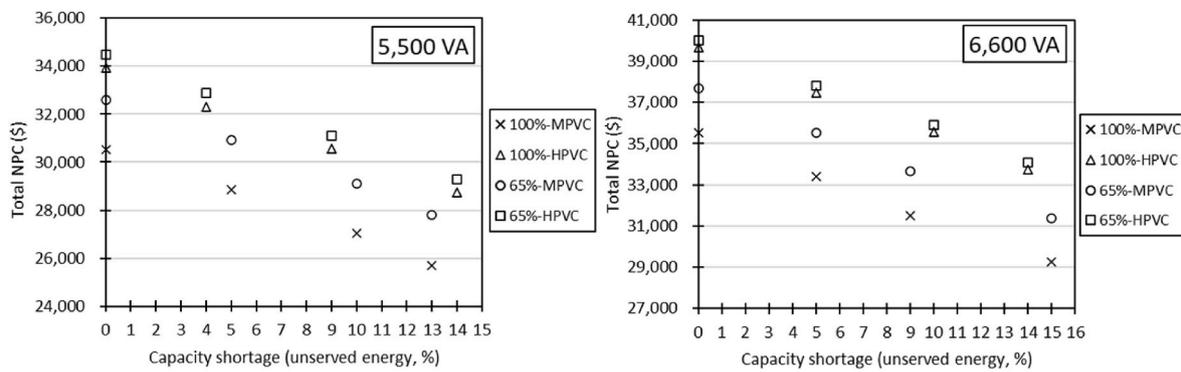


Fig. 6. Total NPC versus unserved energy in all cases for 5,500 VA (left) and 6,600 VA (right).

while considering possible techno-economic scenarios, including the potential impact of applicable billing deduction factors and a range of different unserved energy.

The lowest cost per watt of PV installed capacity can be obtained for all scenarios by comparing the total system cost (total NPC) with the PV installed capacity. Table 8 presents variations in cost per watt of PV installed capacity for all the optimisation results of 100%-MPVC and 65%-MPVC, as well as 100%-HPVC and 65%-HPVC given no-unserved energy (0 % maximum unserved energy), while Tables 9–11 present variations of the cost per watt of PV installed capacity considering 5 %, 10 %, and up to 15 % maximum unserved energy, respectively.

As shown in Table 8, the total NPC per watt of PV installed capacity, under 0 % unserved energy, varied from USD 4.14/Watt to USD 12.54/Watt in all cases across all households. The results show similar costs in the MPVC cases concerning 2,200 VA and 3,500 VA households, slightly more than double in the HPVC cases, and similar for 5,500 VA and 6,600 VA households. It is also found that the results are not affected by the applicable billing deduction factors but simply by the PV capacity. Nevertheless, it should be noted that the results obtained in Tables 8–11 are largely influenced by the household’s daily electricity load profile and other applied scenarios.

The simulation results in terms of possible system capacity, consisting of grid and PV capacity across all unserved energy in all cases of all households, are depicted in Figs. 7 and 8.

As seen in Figs. 7 and 8, higher unserved energy has resulted in lower grid capacity required by the system to meet the demand according to the system’s maximum unserved energy constraint, and the PV capacities are maximised across all unserved energies in different scenarios. Moreover, it is interesting to note that the PV capacities across all MPVC cases are always higher than the grid ones. On the other hand, the grid capacities are mostly higher than those of PV in most HPVC cases, except in 3,500 VA for 9 % unserved energy and beyond. In all cases, the grid capacities have similarly decreased within the unserved energy range. For example, in 2,200 VA (see Fig. 7 left), the grid capacities are found at 1.8 kW, 1.4 kW, 1.3 kW, and 1.2 kW for 0 %, 4 %, 7 %, and 11 % unserved energy, respectively, and similarly in other households.

A sensitivity analysis of the techno-economic factors influencing system performance would benefit stakeholders, particularly residential customers. While focusing on system reliability, this study uses only a 5 % annual interest rate and fixed electricity rates associated with

household segments. As a result, the sensitivity variable used in HOMER is maximum annual unserved energy.

Taking a 2,200 VA household with 100%-MPVC as an example, a graphical sensitivity result depicting possible trade-offs on total NPC versus unserved energy fraction and a sensitivity result of net grid purchases (electricity purchased from the grid minus electricity sold to the grid) versus maximum annual unserved energy are presented in Figs. 9 and 10, respectively. Meanwhile, a sensitivity result of total NPC versus total electricity production is shown in Fig. 11.

Maximum annual unserved energy constraints have varying effects on total NPC, total electricity production, and net grid purchases. As shown in Fig. 9, total NPC cannot be less than USD 8,500 when unserved energy is kept at or below 6 %. According to Fig. 11, a 10 % unserved energy would result in approximately 9,700 kWh/year of electricity production, which would equal approximately USD 8,500 in total NPC.

Despite possible variations and differences in households’ daily loading profiles along with other affecting factors, which, of course, may provide different results and interpretations, this study has sought to explore possible cost-reliability trade-offs in Indonesia’s urban residential grid-connected rooftop PV due to three key factors, namely potential unserved energy, PV capacity, and possible billing deduction scheme. The significance of these factors has been shown in the analysis considering different residential household segments, and therefore, should be considered not only by customers who are willing to apply on-grid rooftop PV but also by stakeholders such as government and utility companies according to their role in supporting more grid-connected rooftop PV capacity.

### 5. Conclusions

This paper explores the potential of grid-connected rooftop PV systems in terms of how they can be better planned and utilised by understanding the possible trade-offs between system reliability and cost while recognising challenges related to electricity supply security in the context of emerging economies. The effects of various unserved energy limits, PV capacities, and billing deduction factors (modelled in HOMER using different sell-back rates) on the systems’ techno-economic parameters have been investigated in order to better understand possible cost-reliability trade-offs for total NPC and unserved energy. The analyses are carried out with the help of HOMER, with four different residential household segments in Surabaya, Indonesia, serving as a case study.

In all four cases of each household segment, i.e., 100%-MPVC, 65%-MPVC, 100%-HPVC, and 65%-HPVC, the optimisation results show reliability-cost trade-offs between the total NPC and all unserved energies. Furthermore, the role of cost components in the trade-offs between HPVC and MPVC cases in terms of initial capital costs and total NPC was highlighted in the analyses. The findings revealed a relatively large difference in total NPC for all households between 100%-MPVC cases and 65%-MPVC cases for all unserved energies, while differences

Table 11  
The cost per watt of PV installed capacity with 15 % maximum unserved energy.

| Household | The cost per watt of PV installed capacity (USD/Watt) |          |           |          |
|-----------|---|----------|-----------|----------|
|           | 100%-MPVC   | 65%-MPVC | 100%-HPVC | 65%-HPVC |
| 2,200 VA  | 3.63  | 4.02     | 8.34      | 8.61     |
| 3,500 VA  | 3.52  | 3.86     | 8.32      | 8.38     |
| 5,500 VA  | 4.68  | 5.06     | 10.45     | 10.65    |
| 6,600 VA  | 4.43  | 4.76     | 10.23     | 10.33    |

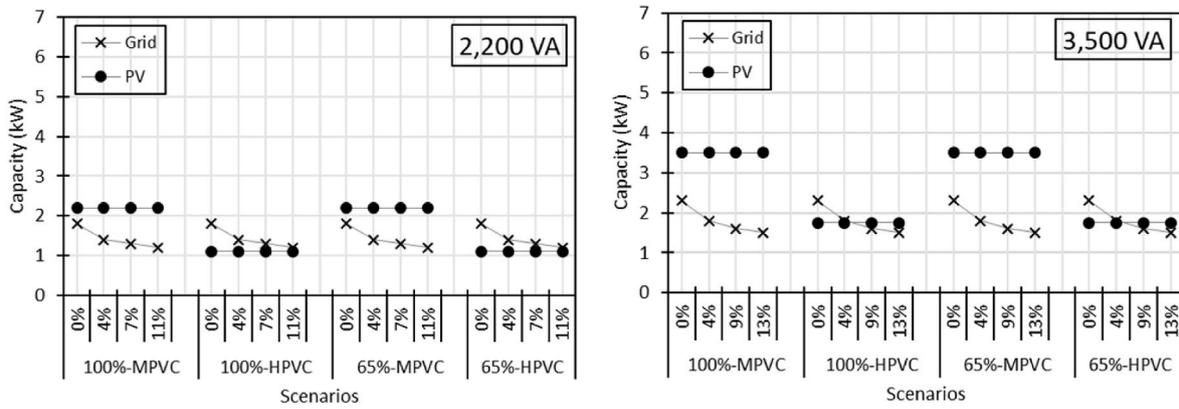


Fig. 7. System capacity across all unserved energies for 2,200 VA (left) and 3,500 VA (right).

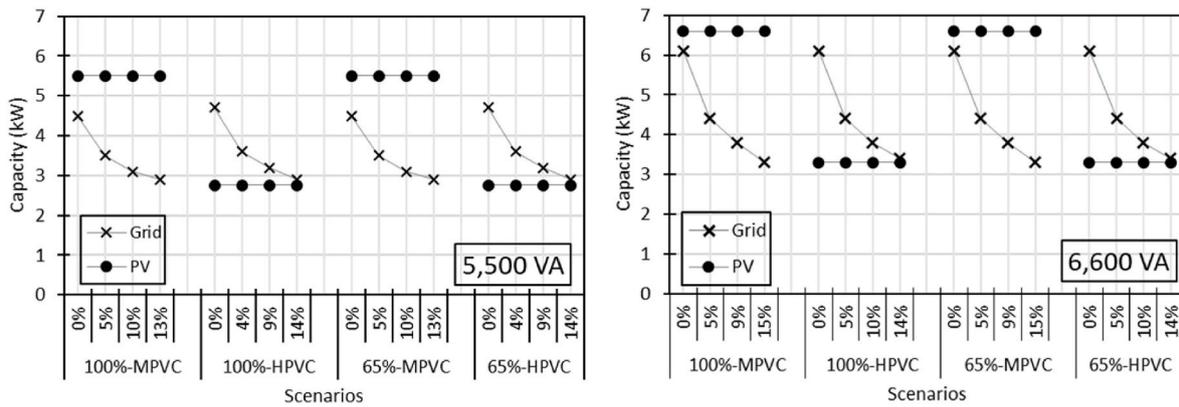


Fig. 8. System capacity across all unserved energies for 5,500 VA (left) and 6,600 VA (right).

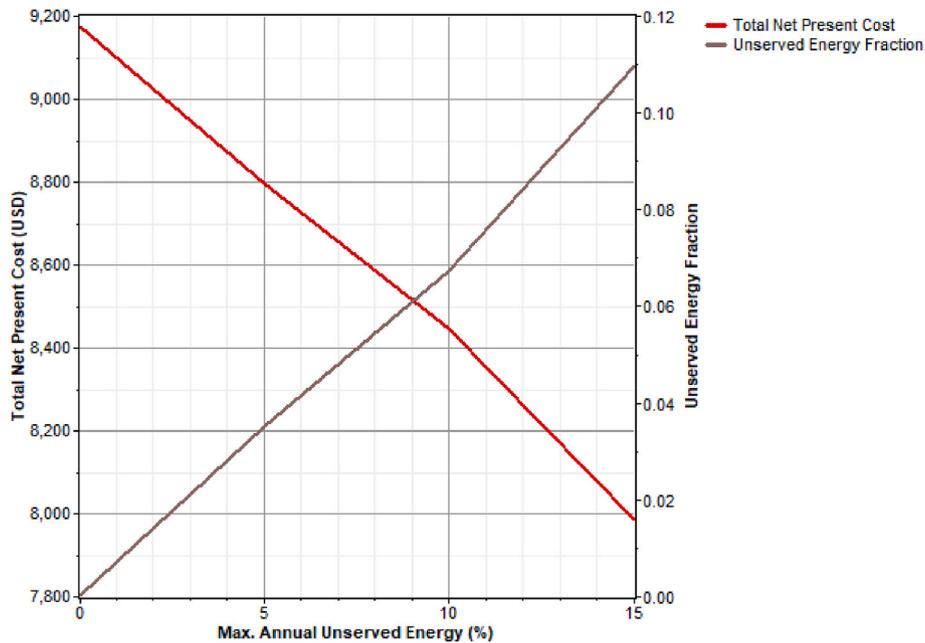


Fig. 9. Sensitivity result of total NPC versus unserved energy fraction in a 2,200 VA household with 100%-MPVC.

between those in 100%-HPVC cases and 65%-HPVC cases are insignificant. The simulation results implied potential benefits of rooftop PV installation up to the maximum permitted capacity and a 100 % billing deduction scheme for households with 2,200 VA, taking into account

different options for unserved energy, installed capacity, and billing deduction percentage.

Among the significant results of this study that highlight the benefits of grid-connected rooftop PV are the following: 1) higher renewable

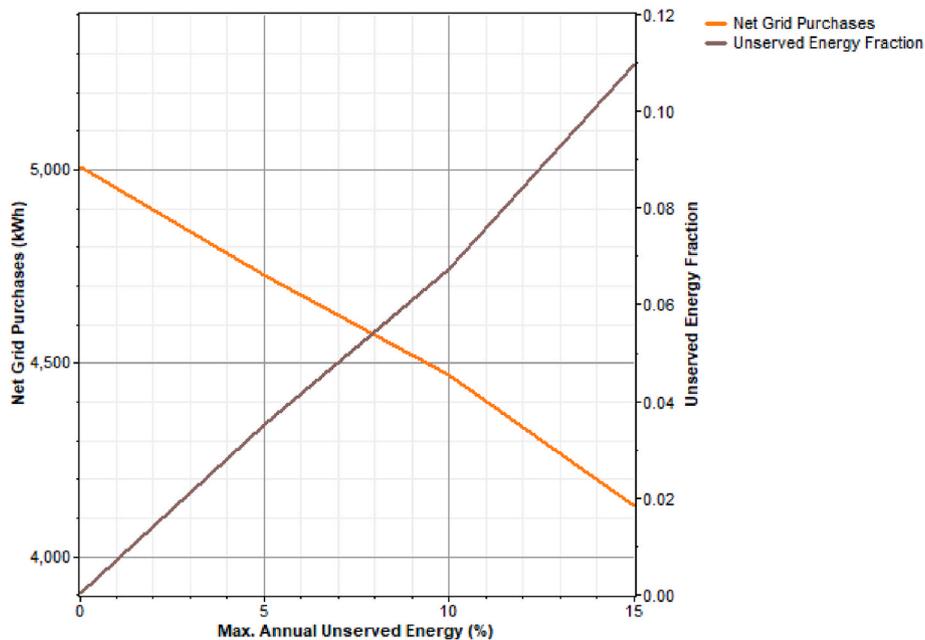


Fig. 10. Sensitivity result of net grid purchases versus maximum annual unreserved energy in a 2,200 VA household with 100%-MPVC.

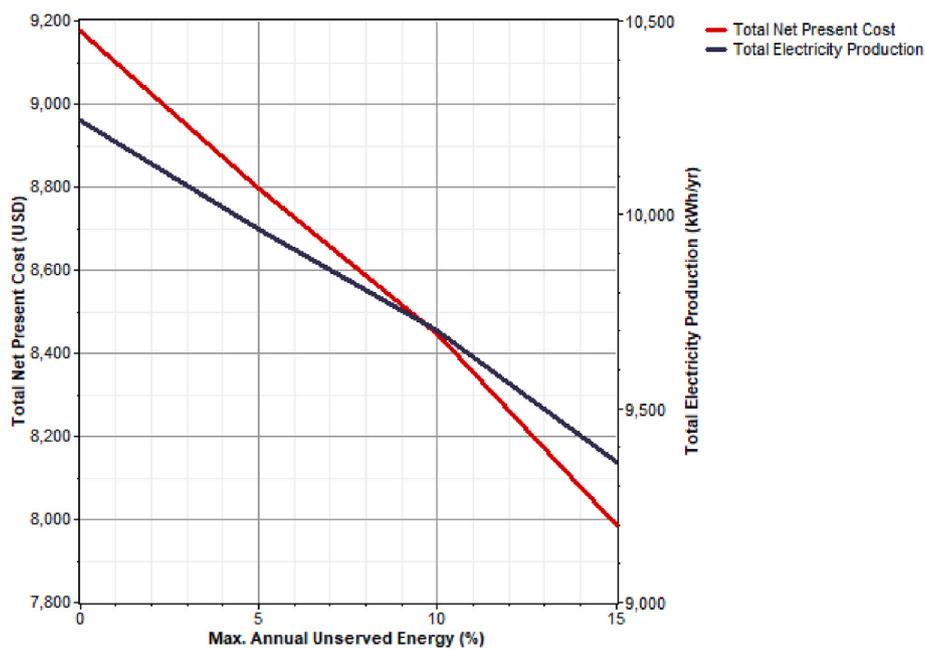


Fig. 11. Sensitivity result of total NPC versus total electricity production in a 2,200 VA household with 100%-MPVC.

energy penetration for MPVC systems compared to HPVC systems regardless of the billing deduction factors; 2) cheaper total NPC are shown by MPVC cases than those of HPVC cases within the same unreserved energy; 3) lower shares of energy charge to the annual total cost in MPVC cases compared to those in HPVC ones; and 4) Over the project lifetime, the cost per kWh consumed (USD/MWh consumed) showed only a slight variance between the system with no-unreserved energy and the system with the poorest reliability, given 100%-MPVC cases in 2,200 VA as an example; 5) All households with a 15 % maximum limit on unreserved energy have the lowest costs per watt of installed PV capacity, and these costs are unaffected by billing deduction factors; 6) based on the system's maximum unreserved energy limits, higher unreserved energy has led to a decrease in the amount of grid capacity needed by the system to meet demand, and the PV capacities are maximised across all

unreserved energies in various scenarios; and 7) Sensitivity analyses have revealed a range of impacts of maximum annual unreserved energy constraints on various parameters, including total NPC, total electricity production, and net grid purchases.

When it comes to grid-connected rooftop PV, residential customers must be thoughtful, as there are potential trade-offs between cost and reliability. At the same time, attention must be paid to changing regulations that may have an impact on overall profitability. This study's analyses provided important findings and insights not only to the residential customers but also to stakeholders involved in the planning and implementation of rooftop PV policies.

Finally, there is no doubt about the grid-connected rooftop PV's techno-economic potential for accelerating distributed renewable energy penetration. Nonetheless, because rooftop PV deployment appears

to be modest, especially in Indonesia, changes to the existing set of regulations are required. More encouraging, innovative policies should be introduced to address the barriers and challenges that customers and the industry face in moving rooftop PV deployment forward.

### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

### Data availability

Data will be made available on request.

### Acknowledgement

The author would like to thank the reviewers for their time and effort in reviewing the manuscript. All valuable comments and suggestions for improving the manuscript's quality are greatly appreciated.

### References

- IRENA. Renewable capacity statistics. Available: <https://www.irena.org/Publications/2023/Mar/Renewable-capacity-statistics-2023>. [Accessed 10 April 2023].
- Hassan MU, Saha S, PVAnalyX ME Haque. A MATLAB toolkit for techno-economic analysis and performance evaluation of rooftop PV systems. *Energy* 2021;223:120074.
- PVPS: snapshot of global PV markets. Available: <https://iea-pvps.org/snapshot-reports/snapshot-2023/>. [Accessed 1 September 2023].
- Tetteh N, Kebir N. Determinants of rooftop solar PV adoption among urban households in Ghana. *Renewable Energy Focus* 2022;43:317–28.
- Pan D, Bai Y, Chang M, Wang X, Wang W. The technical and economic potential of urban rooftop photovoltaic systems for power generation in Guangzhou, China. *Energy Build* 2022;277:112591.
- Duman AC, Güler Ö. Economic analysis of grid-connected residential rooftop PV systems in Turkey. *Renew Energy* 2020;148:697–711.
- EVN Vietnam Electricity. Available: <https://en.evn.com.vn/d6/news/Rooftop-solar-power-boom-is-underway-with-a-total-installed-capacity-reaching-nearly-9300-MWp-66-142-2169.aspx>. [Accessed 31 March 2023].
- Rúa D, Castaneda M, Zapata S, Dyer I. Simulating the efficient diffusion of photovoltaics in Bogotá: an urban metabolism approach. *Energy* 2020;195:117048.
- Li C, Zhou D, Zheng Y. Techno-economic comparative study of grid-connected PV power systems in five climate zones, China. *Energy* 2018;165(B):1352–69.
- Gabr AZ, Helal AA, Abbasy NH. Economic evaluation of rooftop grid-connected photovoltaic systems for residential building in Egypt. *International Transactions on Electrical Energy Systems* 2020;30(6):2379.
- Daioglou V, Mikropoulos E, Gernaat D, van Vuuren DP. Efficiency improvement and technology choice for energy and emission reductions of the residential sector. *Energy* 2022;243:122994.
- Bogdanov D, Ram M, Aghahosseini A, Gulagi A, Oyewo AS, Child M, Caldera U, Sadovskaia K, Farfan J, Barbosa LDSNS, Fasihi M, Khalili S, Traber T, Breyer C. Low-cost renewable electricity as the key driver of the global energy transition towards sustainability. *Energy* 2021;227:120467.
- Aggarwal AK, Syed AA, Garg S. Factors driving Indian consumer's purchase intention of rooftop solar. *Int J Energy Sect Manag* 2019;13(3):539–55.
- Tanoto Y, Haghaddi N, Bruce A, Macgill I. Reliability-cost trade-offs for electricity industry planning with high variable renewable energy penetrations in emerging economies: a case study of Indonesia's Java-Bali grid. *Energy* 2021;227:120474.
- HOMER software. Available: <https://www.homerenergy.com/>. [Accessed 29 August 2023].
- Laib I, Hamidat A, Haddadi M, Ramzan N, Olabi AG. Study and simulation of the energy performances of a grid-connected PV system supplying a residential house in north of Algeria. *Energy* 2018;152:445–54.
- Dondariya C, Porwal D, Awasthi A, Shukla AK, Sudhakar K, Manohar SRM, Bhimte A. Performance simulation of grid-connected rooftop solar PV system for small households: a case study of Ujjain, India. *Energy Rep* 2018;4:546–53.
- PV\*SOL software. Available: <https://pvsol.software/en/>. [Accessed 30 August 2023].
- Photovoltaic geographical information system (PVGIS). Available: [https://joint-research-centre.ec.europa.eu/photovoltaic-geographical-information-system-pvgis\\_en](https://joint-research-centre.ec.europa.eu/photovoltaic-geographical-information-system-pvgis_en). [Accessed 2 September 2023].
- SOLARGIS PV planner. Available: <https://solargis.info/pvplanner/#tl=Google:hybrid&bm=satellite>. [Accessed 2 September 2023].
- SISIFO. Available: <https://www.sisifo.info/es/default> [Accessed 1 September 2023].
- Mohammadi K, Naderi M, Saghafifar M. Economic feasibility of developing grid-connected photovoltaic plants in the southern coast of Iran. *Energy* 2018;156:17–31.
- RETSscreen software. Available: <https://natural-resources.canada.ca/maps-tools-and-publications/tools/modelling-tools/retscreen/7465>. [Accessed 15 September 2023].
- de Jesus ÁXC, Neto DP, Domingues EG. Computational tool for technical-economic analysis of photovoltaic microgeneration in Brazil. *Energy* 2023;271:126962.
- Al Garmi HZ, Awasthi A, Ramli MAM. Optimal design and analysis of grid-connected photovoltaic under different tracking systems using HOMER. *Energy Convers Manag* 2018;155:42–57.
- Lau KY, Muhamad NA, Arief YZ, Tan CW, Yatim AHM. Grid-connected photovoltaic systems for Malaysian residential sector: effects of components costs, feed-in tariffs, and carbon taxes. *Energy* 2016;102:65–82.
- Duman AC, Güler Ö. Economic analysis of grid-connected residential rooftop PV systems in Turkey. *Renew Energy* 2020;148:697–711.
- Bakhshi R, Sadeh J. Economic evaluation of grid-connected photovoltaic systems viability under a new dynamic feed-in tariff scheme: a case study in Iran. *Renew Energy* 2018;119:354–64.
- PVsyst photovoltaic software. Available: <https://www.pvsyst.com/>. [Accessed 7 September 2023].
- Xin-gang Z, Yi-min X. The economic performance of industrial and commercial rooftop photovoltaic in China. *Energy* 2019;187:115961.
- Orioli A, Gangi AD. Six-years-long effects of the Italian policies for photovoltaics on the pay-back period of grid-connected PV systems installed in urban contexts. *Energy* 2017;122:458–70.
- Tomar V, Tiwari GN. Techno-economic evaluation of grid-connected PV system for households with feed-in tariff and time of day tariff regulation in New Delhi – A sustainable approach. *Renew Sustain Energy Rev* 2017;70:822–35.
- Pillai GG, Putrus GA, Georgitsioti T, Pearsall NM. Near-term economic benefits from grid-connected residential PV (photovoltaic) systems. *Energy* 2014;68:832–43.
- Khezri R, Mahmoudi A, Whaley D. Optimal sizing and comparative analysis of rooftop PV and battery for grid-connected households with all-electric and gas-electricity utility. *Energy* 2022;251:123876.
- Regulatory Support. Key to unlock Indonesia's solar potential. Available: <https://iesr.or.id/en/regulatory-support-key-to-unlock-indonesias-solar-potential>. [Accessed 2 September 2023].
- Technical issue is not the main barriers to the renewable energy transition; financial and regulatory issues are. Available: <https://iesr.or.id/road-to-energy-transition>. [Accessed 9 September 2023].
- Indonesia's solar policies designed to fail?. Available: [https://ieefa.org/wp-content/uploads/2019/02/Indonesias-Solar-Policies\\_February-2019.pdf](https://ieefa.org/wp-content/uploads/2019/02/Indonesias-Solar-Policies_February-2019.pdf). [Accessed 3 September 2023].
- Market potential of rooftop solar PV in Surabaya: a report. Available: <https://iesr.or.id/wp-content/uploads/2019/08/IESR-Market-Potential-of-Rooftop-Solar-PV-in-Surabaya.pdf>. [Accessed 15 September 2023].
- Residential rooftop solar: technical and market potential in 34 provinces in Indonesia. Available: <https://iesr.or.id/wp-content/uploads/2019/07/IESR-Technical-Note-Residential-Rooftop-Solar-Potential-in-34-Provinces-ID.pdf>. [Accessed 9 September 2023].
- Government accelerates the utilization of rooftop solar power plants. Available: <https://indonesia.go.id/kategori/editorial/6865/government-accelerates-the-utilization-of-rooftop-solar-power-plants?lang=2>. [Accessed 20 March 2023].
- Rooftop PLTS is increasingly popular with households, but there are installation restrictions (in Bahasa Indonesia). Available: <https://kbr.id/nasional/12-2022/plt-s-atap-makin-diminati-rumah-tangga-tapi-ada-pembatasan-pemasangan/110319.html> [Accessed 19 March 2023].
- PLN annual report 2021: transition to net zero emissions. Available: <https://web.pln.co.id/statics/uploads/2022/08/Laporan-Tahunan-2021.pdf>. [Accessed 26 February 2023].
- PLN Electricity Supply Business Plan (RUPTL) 2021-2030 (in Bahasa Indonesia). Available: <https://web.pln.co.id/statics/uploads/2021/10/ruptl-2021-2030.pdf> [Accessed 25 February 2023].
- PLN's New 2021 - 2030 Business Plan: High hopes and 'greener' projects. Available: [https://insightplus.bakermckenzie.com/bm/attachment\\_dw.action?attkey=FRbANEucS95NMLRN47z%2BeeOgEFCt8EGQJswJiCH2WAUTleh6%2BAJHrupJMOqEcbp&nav=FRbANEucS95NMLRN47z%2BeeOgEFCt8EGQJswJiCH2WAUTleh6%2BAJHrupJMOqEcbp&attdocparam=pB7HEsg%2FZ312Bk80IuOIH1c%2G6BY4beLEAeghVfJ1aYVMi%3D&fromContentView=1](https://insightplus.bakermckenzie.com/bm/attachment_dw.action?attkey=FRbANEucS95NMLRN47z%2BeeOgEFCt8EGQJswJiCH2WAUTleh6%2BAJHrupJMOqEcbp&nav=FRbANEucS95NMLRN47z%2BeeOgEFCt8EGQJswJiCH2WAUTleh6%2BAJHrupJMOqEcbp&attdocparam=pB7HEsg%2FZ312Bk80IuOIH1c%2G6BY4beLEAeghVfJ1aYVMi%3D&fromContentView=1) [Accessed 18 February 2023].
- Ruptl 2021-30: PLN steps up ambitions to accelerate clean energy investments in Indonesia. Available: <https://www.oecd.org/environment/cc/cefm/indonesi-a/RUPTL-2021-30-PLN-steps-up-ambitions-to-accelerate-clean-energy-investments-in-Indonesia.pdf>. [Accessed 14 March 2023].
- Wang D, Liu D, Wang C, Zhou Y, Li X, Yang M. Flexibility improvement method of coal-fired thermal power plant based on the multi-scale utilization of steam turbine energy storage. *Energy* 2022;239:122301.
- Flexible Thermal Power Plant: An Analysis of Operating Coal-Fired Power Plants Flexibly to Enable the High-Level Variable Renewables in Indonesia's Power System. Available: <https://iesr.or.id/wp-content/uploads/2022/06/IESR-Flexible-Thermal-Power-Plant-2022.pdf> [Accessed 29 August 2023].
- MEMR Regulation No. 26/2021 (in Bahasa Indonesia). Available: <https://jdih.esdm.go.id/index.php/web/result/2225/detail>. [Accessed 1 March 2023].
- Rooftop PV users cannot sell electricity to PLN (in Bahasa Indonesia). Available: <https://www.cnbcindonesia.com/news/20230308131539-4-419924/pemakai-plt-s-atap-tak-bisa-jual-listrik-ke-pln-ini-alasannya>. [Accessed 12 September 2023].
- Not Yet Extinct, PLN Adds 13,819 MW Coal Power Plants Until 2030 (in Bahasa Indonesia). Available: <https://www.cnbcindonesia.com/news/20230308131539-4-419924/pemakai-plt-s-atap-tak-bisa-jual-listrik-ke-pln-ini-alasannya>. [Accessed 12 September 2023].

- 11005154444-4-281622/belum-punah-pln-tambah-13819-mw-pltu-batu-bara-hingga-2030 [Accessed 5 September 2023].
- [51] Solar resource and photovoltaic potential of Indonesia. Available: <http://documents.worldbank.org/curated/en/729411496240730378/Solar-resource-and-photovoltaic-potential-of-Indonesia>. [Accessed 15 March 2023].
- [52] Page, J. The role of solar-radiation climatology in the design of photovoltaic systems. *Practical Handbook of Photovoltaics* 2012:573–643.
- [53] NSRDB. National solar radiation Database. Available: <https://nsrdb.nrel.gov/data-viewer>. [Accessed 31 August 2023].
- [54] Tarif adjustment (in bahasa Indonesia). Available: <https://web.pln.co.id/pelangan/tarif-tenaga-listrik/tariff-adjustment>. [Accessed 24 February 2023].
- [55] Good news! Electricity tariffs for the next 3 Months don't increase. Available, <https://voi.id/en/economy/241919>. [Accessed 24 February 2023].
- [56] Solar PV inverter DC to AC 1000-watt price in Indonesia. Available: <https://www.tokopedia.com/baterailab/thinkpower-grid-tie-ongrid-inverter-1-6k-sseries-with-li-miter-wifi-1000w?extParam=ivf%3Dfalse&src=topads>. [Accessed 10 September 2023].
- [57] Solar PV panel 100-Watt peak price in Indonesia. Available: <https://www.tokopedia.com/asia-teknindo/solar-panel-surya-solar-cell-100-wp-100-wattpolycrystalline-maysun>. [Accessed 9 September 2023].
- [58] How much does it cost to install a solar PV roof at home? (in Bahasa Indonesia). Available: <https://www.kompas.com/properti/read/2022/06/04/080000221/berapa-biaya-pemasangan-plts-atap-di-rumah-simak-penghitungannya?page=all>. [Accessed 21 February 2023].
- [59] Should I install solar panels at home?. Available: <https://www.thejakartapost.com/business/2022/02/04/should-i-install-solar-panels-at-home.html>. [Accessed 20 February 2023].
- [60] Rooftop PV system fixed capital and maintenance cost in Indonesia (in Bahasa Indonesia). Available: [https://www.kompas.com/properti/read/2022/06/04/080000221/berapa-biaya-pemasangan-plts-atap-di-rumah-simak-penghitungannya?page=all#:~:text=Adapun%20total%20biaya%20pemasangan%20PLTS%20sebesar%20Rp%2033.703.900%2C%20rinciannya,Beton\)%3A%20Rp%203.060.000](https://www.kompas.com/properti/read/2022/06/04/080000221/berapa-biaya-pemasangan-plts-atap-di-rumah-simak-penghitungannya?page=all#:~:text=Adapun%20total%20biaya%20pemasangan%20PLTS%20sebesar%20Rp%2033.703.900%2C%20rinciannya,Beton)%3A%20Rp%203.060.000). [Accessed 11 September 2023].