

Application of Smart Home and Smartwatch to Assist Elders in Home Care Scenario

By Handy Wicaksono

Application of Smart Home and Smartwatch to Assist Elders in Home Care Scenario

Handy Wicaksono^{1, a)}, Petrus Santoso^{1, b)}, Indar Sugiarto^{1, c)}, Dwi Kristiyono^{1, d)},
Jonathan Aditya Wijaya^{1, e)}

8

Author Affiliations

¹Electrical Engineering Department, Petra Christian University
Jl. Siwalankerto 121 – 131, Surabaya, Indonesia

4

Author Emails

^{a)} Corresponding author: handy@petra.ac.id

^{b)} petrus@petra.ac.id

^{c)} indi@petra.ac.id

^{d)} dwi@petra.ac.id

^{e)} jonathanadityawijaya@gmail.com

Abstract. Many elders choose to live independently in their own houses. This research aims to apply home automation and wearable device technology to assist the elders in the home care scenario. Unlike many research in this field, we apply our home automation system in the real or physical house. There are four main features of our smart home: door control, lighting control, temperature control, and gas leakage detection. Six Wemos D1 mini are used as local controller for sensors and actuators, while a RaspberryPi 4 is utilized as the main controller. NodeRed is chosen as the tool to integrate various components in our system. We also develop the mobile sensing platform called SmartSens. Samsung Galaxy Watch is used as smartwatch worn by the elder. We then conduct simple experiments where the elder control our smart home in manual mode successfully. The automatic mode is also running well. Additionally, heart rate and step count data is also successfully collected from the smartwatch.

INTRODUCTION

Recently, life expectancy for elders are increasing. This means the needs of caregivers, ones who take care of the elders, are also increasing. Nowadays, a lot of people can not take care of their own parents or grandparents because they are very busy in their own jobs or family life. It is also not easy (and is expensive) to find a trustable and capable person to take care of the elders. One solution is putting elders in a retirement home, but some people (or the elders themselves) do not agree with this solution because it might make the elders feel do not loved by their family. Many elders want to spend their retirement time in their own house [1]. However, it might be too risky for them, as many unwanted things, related with their health and security, might happen to them. In this research, we suggest to combine home automation and wearable device technology to assist elders who live alone in their own house (home care scenario).

Majumder et al. [2] proposed a smart home system for elders which equipped by home gateway which connect various home appliances, sensors which are attached on the elders, and data collection system. The smart house also must be connected to internet so the elders can contact medical staffs (doctor or nurse) or emergency health service. The sensors attached on the elders are crucial as they monitor condition of elders directly. Wang et al. [3] mentioned three main things that should be supervised: the vital signs (e.g. temperature, heart rate, respiration rate, blood pressure, oxygen saturation), the accurate positions of elders at home, and activity recognition of elders (for

example: falling, running, laying). These monitoring results can be recorded into a database and sent to the caregivers or medical staffs.

Mobile sensing platform (MSP) is a combination of wireless sensors, smartphones and web that provide a powerful ubiquitous computing platform [4]. Wireless sensor in this platform can be any kind of sensor that communicates directly to the web server or through a smartphone device. It can be a custom wearable device, phone internal sensor or a smartwatch device. In the mobile sensing platform, a user level application runs on the smartphone as a broker between user and the web. The phone reads internal phone's sensor or external sensor and sends data to the web server [5].

Triantafyllidis et al. [6] discussed a pervasive systems, especially in the area of healthcare. They give a review on three important areas namely, mobile phone sensing with in-built or external sensors, self reporting and social sharing. They discussed also about the shortcomings and directions of the system. Most developed systems do not reach their full potential, mainly because of design and validation issue.

In [4], an architecture of mobile sensing platform that support usage of smartwatch as sensing device has been proposed. The development of sample application with the proposed architecture has been done. A development framework called SmartSens also has been build.

In this research, we propose an application of a smart home and a wearable device to assist elders in home care scenario. We use NodeRed to integrate various components in our smart house as an internet of things system [7]. We also use SmartSens [4], a mobile sensing platform that we have been developed previously Our research is unique as we implement our system in a physical house (not just miniature).

RESEARCH METHOD

10

In this section, we will describe the smart home design, and the wearable device system framework.

Smart Home Design

Many research in home automation field are only applied in miniature size. In this case, most sensors and actuators are wired directly to a local controller as their location are closed to each other. When we try to implement the system in the real house, the main problem that we deal with is the sensors, the actuators, and the main controller are far from each other. Wiring all of them also not practical and not tidy. In order to overcome this problem, we decide to equip each sensor and/or actuator with a local controller that has wi-fi capability. We choose Wemos D1 mini as it is a low-cost IoT controller that has all the features we need. Some relay shields are used to connect the controller with light and fan which operating in AC voltage.

To gather all of the data from various IoT controllers, we choose Node Red that is installed in a RaspberryPi 4. NodeRed is a flow-based visual programming environment that is suitable to integrate various IoT hardware and softwares. We develop a dashboard that can be accessed from internet browser in any devices. When abnormal things happen, for example when there is a gas leak, a notification email will be sent to the houseowner. The block diagram is shown in Figure 1.

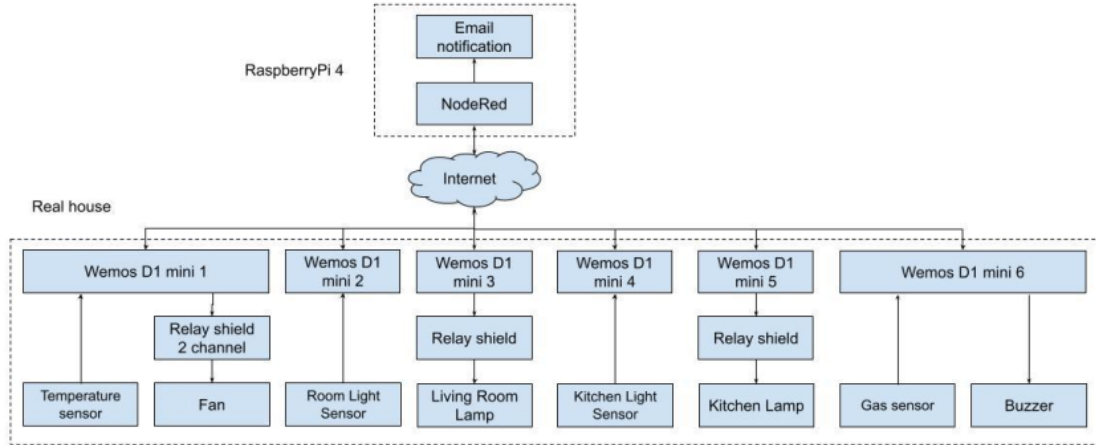


FIGURE 1. Block diagram of our system

There is one subsystem that has not been connected via internet: the smart door system. Currently it is only implemented locally using a magnetic sensor, a RFID sensor, and Raspberry Pi 3B as the local controller.

There are three automated sections in our house: the bedroom door, the living room, and the kitchen. The bedroom door is automated by giving magnetic lock on the upper side of the door. Whenever a particular RFID card is scanned, the magnetic lock is released, and a person can enter the bedroom. RaspberryPi 3B is used as a local controller here. See Figure 2 for the detail.

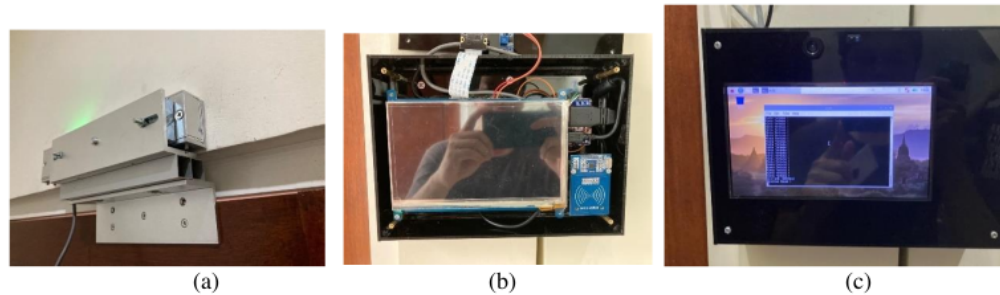
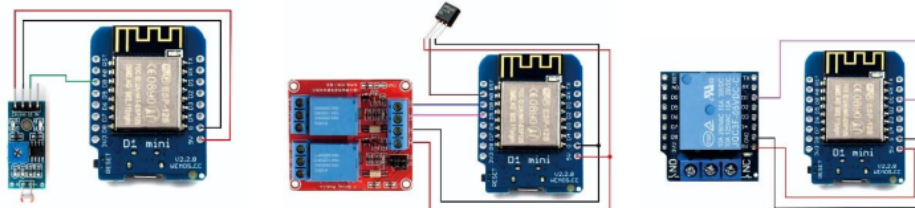


FIGURE 2. Smart door system

In the living room, we provide a light sensor (LDR, see Figure 3a.) and an AC lamp (driven by a relay, see Figure 3c.) as a lighting control system. Similar lighting control system also set in the kitchen. We also provide a temperature sensor (LM 35) and a fan to build a temperature control system (see Figure 3b) in the kitchen. A gas leakage detection system is built here by providing a MQ2 gas sensor and a buzzer (see Figure 3d.). We put all components carefully in one sturdy black box, so it looks professional (see Figure 3e and 3f). These black boxes are located around the house which will be used for experiments.



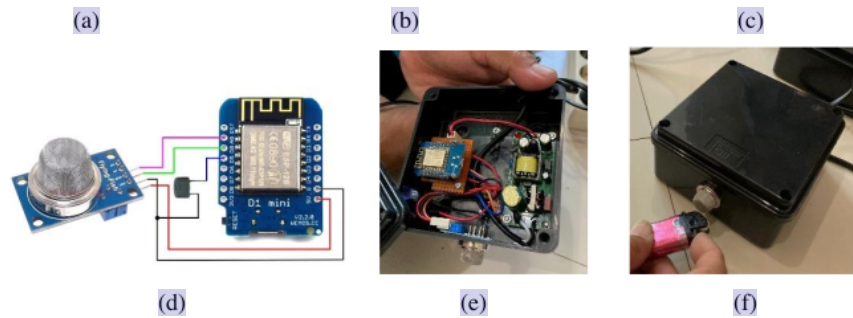


FIGURE 3. Hardware components of our system

There are two control modes on our system: manual and automatic. The user should choose which mode he wants to use. In manual mode, all of the actuators (lights, fan, and buzzer) can be controlled manually from the NodeRed dashboard in the internet browser. While in automatic mode, the actuators are controlled based on these simple rules:

- Lighting rules: if the light sensor reading is below a particular threshold, then the AC lamp will be turned on automatically
- Temperature rules: if temperature is more than the first threshold, then the fan will operate in low speed. If the temperature is more than the second one, then the fan will move in high speed.
- Gas rules: if gas concentration is more than a particular threshold, then the buzzer is turned on.

The wearable device

SmartSens is a modular development framework for mobile sensing platform. There are three main parts in the framework. The first part is for server development, the second part is for mobile apps development and the last part is for smartwatch apps development. Server part adopt NodeJS as the main programming language. Mobile apps development support Android and iOS platform with Java for Android and Swift for iOS. For the smartwatch part, the supported platform is Tizen and WearOS.

Figure 4 depicts the architecture of the mobile sensing platform. The platform consists of Server part, Smartphone part and smartwatch part. Server part consists of Web API which communicate with smartphone and smartwatch, database backend and processing backend. Smartphone part has two kind of mode, master smartphone and slave smartphone. For master smartphone mode, the communication only with the server. This mode is used for monitoring purpose. The slave smartphone mode concern with sensing through external sensor (smartwatch) or its internal sensor. Smartwatch part dealing with sensing mechanism and simple interface to the user.

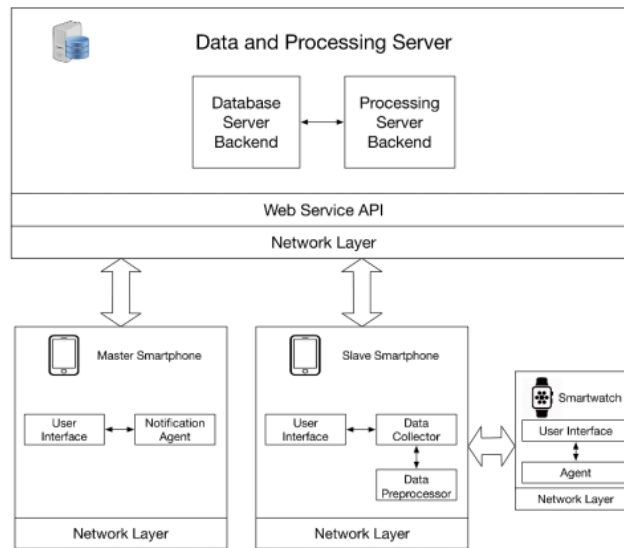


FIGURE 4. Mobile sensing platform architecture

The web API for the server conform to RESTful architecture. Data exchange uses JSON as standard format. Server receive JSON request from client and give response. It can be Success response or Error response. Figure 5 depicts an example of such request.

API Endpoint	JSON Request	JSON Response
/guardian/signUp	Request : <pre>{ "email": "s", "password": "s", "name": "s", "fcmClientToken": "s" }</pre>	Success Response: <pre>{ "message": "Thanks! ", "guardianId": i, "name": "s", "email": "s" }</pre> Error Response: <pre>{ "message": "... " }</pre>

FIGURE 5. JSON exchange example

Beside web API, server also has backend processing element. The backend processing element is modular. It is the core service element of the server. There are the database backend and the processing backend. We can add processing logic module in the processing backend. By default, each raw data received from the sensor is send to the database backend through processing backend. In processing backend we can add custom processing algorithm, such as fall detection, geofencing, activity detection, etc. Processing backend also configurable to accept data from single sensor or multiple sensor. The configuration is done through the web API.

In the master smartphone mode, the core part of the framework is the notification agent. Notification agent interacts with server through publish subscribe mechanism and gives notification for a predefined condition. The publish subscribe and notification mechanism is configurable in the API.

For slave smartphone mode, the main function is to do sensing using internal sensor or external sensor. The core part is the data preprocessor. The framework implements sensing architecture that consists of sensing module and sensor manager. Sensing module provide access to the sensor. When new data is available, it is processed and structured in the JSON format. The resulting object then send to the data collector. Sensor manager deal with the

sensor availability detection, initialization, configuration, start and stop sensing process. It can be configured for continuous, periodic or aperiodic sensing.

As for smartwatch, the framework provide an agent to do sensing process. The agent works like sensing module and sensor manager in the slave smartphone. The configurable setting is how smartwatch provide data to other entities in the system. It can communicate directly with the server or communicate with slave smartphone. It can wait for signal from other device to send data or actively sending data to the other device.

RESULTS AND DISCUSSION

In this section, we elaborate the home automation scenario, testing results for the smart house and the smartwatch.

Experiments on the home automation system

The sensors, actuators, and the controllers of our system are located in three areas of a house: a bedroom door, a living room, and a kitchen (see Figure 6).



FIGURE 6. Location of sensors and actuators in the house

We successfully perform some experiments on the manual mode:

- The elder opens the door by tapping the RFID card on the controller (see Figure 7a. and 7b)
- The elder controls the AC lamp in the living room (see Figure 7c and 7d)
- The elder controls the AC lamp in the kitchen (see Figure 7e and 7f)
- The elder controls the fan in the kitchen (see Figure 7g and 7h)
- The elder operate the gas stove so the amount of gas detected by the sensor will be changed (see Figure 7i)

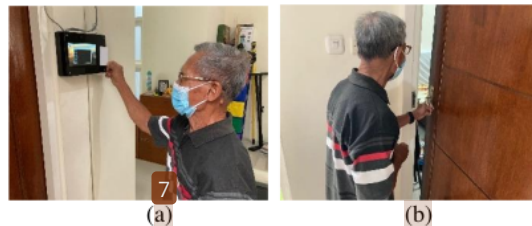




FIGURE 7. The elder performs manual control on the smart home

All of the analog sensor data (such as: light sensor, temperature sensor, gas sensor) are displayed in gauges on NodeRed (see Figure 8a). They are also available in trend (see Figure 8b), so it is easier for user to get the context of the data.

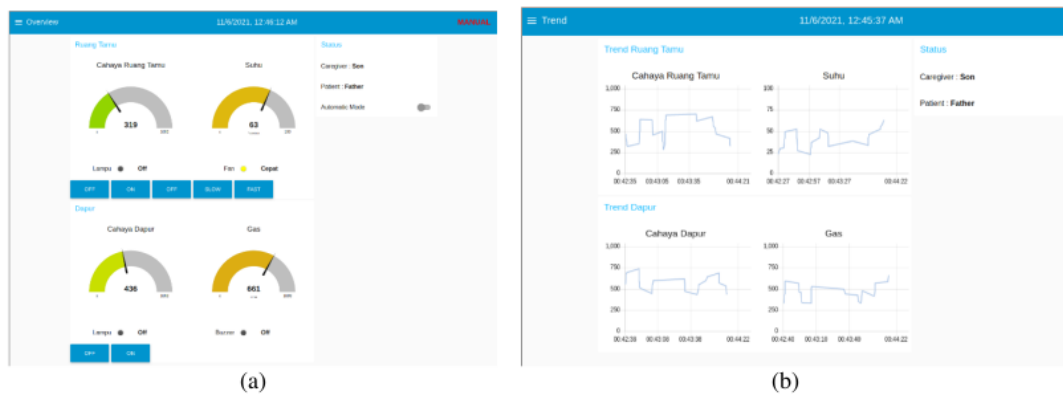


FIGURE 8. NodeRed dashboards for the smart home

The simple automatic control mode is also successfully applied in our system. By implementing JavaScript program in NodeRed functions, the simple rules mentioned in Section Research Design are applied.

We also implement the alarm notification feature. If the gas concentration is high, our system might trigger an alarm notification email to the houseowner. Whenever the gas concentration is normalized, another notification email will be sent. Figure 9 shows the email received from our system.

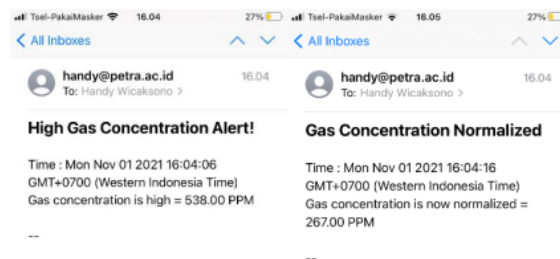


FIGURE 9. Alarm notification email for the houseowner

Experiments on the wearable Device

An experiment is performed to ensure the working mechanism of data acquisition in the framework. For this experiment, a particular subject wears the smartwatch for several days (Figure 10 shows the elder who is wearing the smartwatch).



FIGURE 10. The elder wear the Samsung Galaxy Watch

The smartwatch collects the data and periodically sends it to the slave smartphone. There are two kinds of information collected in the experiment, namely heart rate and step count. Figure 11 and 12 shows the result of the experiment. We are still doing preliminary experiments, so we just test the ability of our system to read those information.

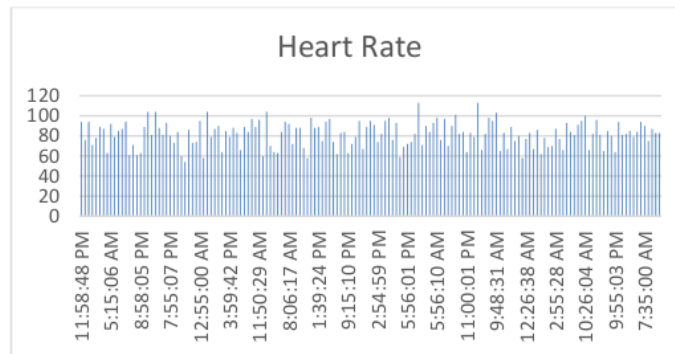


FIGURE 11. The heart rate information

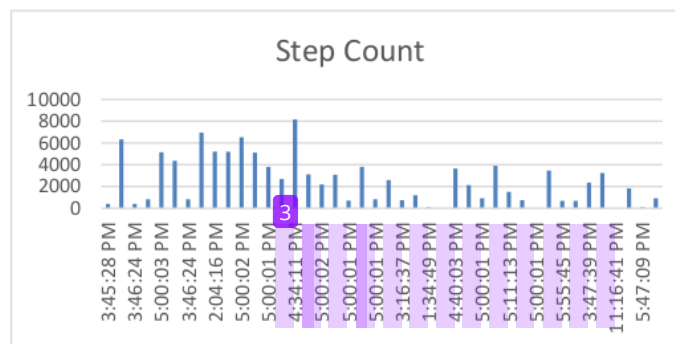


FIGURE 12. The step count information

Another experiment is performed to check the performance of the framework in the case of battery usage. There are three defined scenarios in this experiment, namely continuous usage, periodic heavy usage, and periodic light usage. In the continuous usage, testing device is configured to read various sensor continuously whenever the data is ready. In the periodic heavy usage, the sensing rate is limited for a single data reading per minute. For periodic light usage, data reading is limited to every 5 minutes.

Testing process is performed for 10 cycles. For each cycle, smartwatch is used until 5% battery capacity is left. The specification of tested smartwatch device is shown at Table 1. The testing result is shown on Figure 13. In Continuous sensing scenario, in average 18.4 percent battery capacity is used per hour. Maximum usage is 19.1 percent per hour, and minimum usage is 17.5 percent per hour. In Periodic-heavy scenario, in average 14.2 percent battery is used per hour. Maximum usage is 15.3 percent per hour, and minimum usage is 12.1 percent per hour. In Periodic-light scenario, in average 8 percent battery is used per hour. Maximum usage is 8.5 percent per hour and minimum usage is 7 percent per hour.

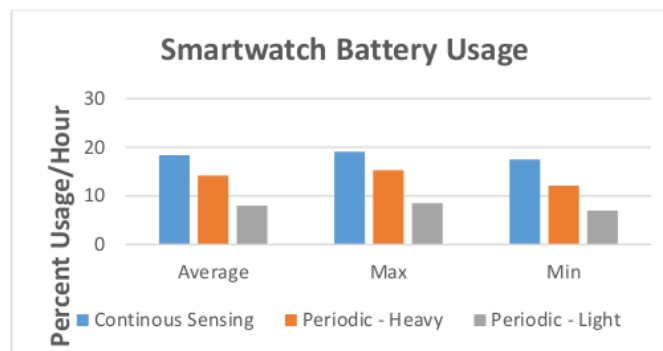


FIGURE 13. The smartwatch battery usage information

CONCLUSIONS

We integrate a smart home system and a smartwatch to assist elders in home care scenario. We successfully developed and tested the smart home that can be controlled in manual (via internet) or automatic (based on sensor readings) mode. Our smart home has four main features: door control, lighting control, temperature control, and gas leakage detection. Buzzer will be turned on and an email notification will be sent to the houseowner if the gas concentration is high. We also test the data collection of heart rate and step count of the elder via smartwatch. We also evaluate the battery usage of the smartwatch in various conditions. Further design and experiments still need to be done to integrate these two components into one system so it can assist the elder effectively.

ACKNOWLEDGMENTS

This research is fully funded by Hibah Penelitian Terapan Unggulan Perguruan Tinggi (PTUPT) from Ditjen Dikti.

REFERENCES

1. J. V Hoof, G. Demiris, and E. J. M. Wouters, *Handbook of smart homes, health care and well-being* (Springer International Publishing, 2017).

2. S. Majumder, E. Aghayi, M. Nofaresti, H. Memarzadeh-Tehran, T. Mondal, Z. Pang, and M. Deen, "Smart homes for elderly healthcare—Recent advances and research challenges", in *Sensors* 17, no. 11 (2017)
3. Z. Wang, Z. Yang, and T. Dong. "A review of wearable technologies for elderly care that can accurately track indoor position, recognize physical activities and monitor vital signs in real time." In *Sensors* 17, no. 2 (2017)
4. P. Santoso, F. Pasila, I.H. Putro, "Mobile sensing platform using smartwatch", in *Electrical Power, Electronics, Communications, Controls and Informatics Seminar (EECCIS)*, (IEEE, Malang, Indonesia 2018), pp. 430-433.
5. E. Macias, A. Suarez, and J. Lloret, "Mobile sensing systems", in *Sensors*, vol. 13, no. 12, pp. 17292–17321 (2013).
6. A.K. Triantafyllidis, C. Velardo, D. Salvi, S.A. Shah, V.G. Koutkias, L. Tarassenko, "A survey of mobile phone sensing, self reporting, and social sharing for pervasive healthcare", in *IEEE Journal of biomedical and health informatics* 1:218-227(2015).
7. H. Wicaksono, P. Santoso, I. H. Putro, I. S. Hutomo, and P. Alvina, "Towards Integration of Heterogeneous Controllers in an IOT-based Automation System", in *E3S Web of Conferences* Vol. 188 (EDP Sciences, 2020).

Application of Smart Home and Smartwatch to Assist Elders in Home Care Scenario

ORIGINALITY REPORT

7%

SIMILARITY INDEX

PRIMARY SOURCES

- 1 Petrus Santoso, Felix Pasila, Iwan Handoyo Putro. "Mobile Sensing Platform Using Smartwatch", 2018 41 words — 1%
Electrical Power, Electronics, Communications, Controls and Informatics Seminar (EECCIS), 2018
Crossref
 - 2 Andreas K. Triantafyllidis, Carmelo Velardo, Dario Salvi, Syed Ahmar Shah, Vassilis G. Koutkias, Lionel Tarassenko. "A Survey of Mobile Phone Sensing, Self-Reporting, and Social Sharing for Pervasive Healthcare", IEEE Journal of Biomedical and Health Informatics, 2017 31 words — 1%
Crossref
 - 3 Jun Jiang, Mehrdad Moallem. "Development of an Intelligent LED Lighting Control Testbed for IoT-based Smart Greenhouses", IECON 2020 The 46th Annual Conference of the IEEE Industrial Electronics Society, 2020 27 words — 1%
Crossref
 - 4 Lilianny Arifin, Wanda K. Widigdo, Anik Juniwati, Danny Mintorogo. "The value of corridor in flat as place attachment in the life of the dwellers", AIP Publishing, 2017 18 words — 1%
Crossref
 - 5 www.e3s-conferences.org 16 words — 1%
Internet
-

6	www.coursehero.com Internet	13 words — < 1%
7	www.hindawi.com Internet	12 words — < 1%
8	ced.petra.ac.id Internet	11 words — < 1%
9	open.library.ubc.ca Internet	11 words — < 1%
10	Lecture Notes in Computer Science, 2015. Crossref	9 words — < 1%
11	dx.doi.org Internet	9 words — < 1%

EXCLUDE QUOTES OFF
EXCLUDE BIBLIOGRAPHY ON

EXCLUDE MATCHES OFF