



“Civil Engineering Innovation for a Sustainable Future”



The 5th Euro Asia Civil Engineering Forum Conference (EACEF5)
Surabaya, Indonesia, 15-18 September 2015

Editors:

Antoni

Ima Muljati

Djwantoro Hardjito

PREFACE

Papers published in this edition of Procedia Engineering have been presented in The 5th Euro Asia Civil Engineering Forum (EACEF-5) at Petra Christian University, Surabaya, Indonesia, from 15-18 September 2015. The theme for EACEF-5 is **‘Civil Engineering Innovation for a Sustainable Future’**. The conference was jointly organized by Petra Christian University, Surabaya, Universitas Pelita Harapan, Jakarta and Universitas Atma Jaya Yogyakarta, Yogyakarta, Indonesia.

Civil engineers and researchers in the field are challenged to play important roles and responsibilities in constructing a sustainable future. EACEF-5 conference provided a platform for sharing ideas and findings, as well as the challenges involved. Publication of all of the aforementioned papers in Procedia Engineering enables a wider circulation of the valuable thoughts contained in the papers.

The Editors would like to express their highest gratitude to all of the contributing authors of the papers published in this volume, as well as to the Organizing Committee and other parties involved.

The Editors

COMMITTEES

STEERING COMMITTEE

Benjamin Lumantarna, *Petra Christian University, Indonesia*
Hariato Hardjasaputra, *Universitas Pelita Harapan, Indonesia*
Yoyong Arfiadi, *Universitas Atma Jaya Yogyakarta, Indonesia*
Timoticin Kwanda, *Petra Christian University, Indonesia*
Manlian A. Ronald, *Universitas Pelita Harapan, Indonesia*

INTERNATIONAL SCIENTIFIC COMMITTEE

Worsak Kanok-Nukulchai, *Asian Institute of Technology, Thailand*
B.V. Rangan, *Curtin University, Australia*
Koji Sakai, *Kagawa University, Japan*
Takafumi Noguchi, *The University of Tokyo, Japan*
Tamon Ueda, *Hokkaido University, Japan*
DongUk Choi, *Hankyong National University, South Korea*
Tawatchai Tingsanchali, *Thailand*
Piti Sukontasukkul, *King Mongkut University of Technology, Thailand*
Nguyen Van Chanh, *Ho Chi Minh City University of Technology, Vietnam*
Chan Weng Tat, *National University of Singapore*
Susanto Teng, *Nanyang Technological University, Singapore*
Mohd. Warid Hussin, *Universiti Teknologi Malaysia*
Prabir K. Sarker, *Curtin University, Australia*
Drajat Hoedajanto, *HAKI, Indonesia*
Robby Soetanto, *Loughborough University, United Kingdom*
Iswandi Imran, *Bandung Institute of Technology, Indonesia*
Tavio, *Institut Teknologi Sepuluh Nopember, Indonesia*
Sholihin As'ad, *Sebelas Maret University, Indonesia*
Han Ay Lie, *Diponegoro University, Indonesia*
Gideon Hadi Kusuma, *Australia*
Sugie Prawono, *Petra Christian University, Indonesia*
Wimpy Santosa, *Parahyangan Catholic University, Indonesia*
Ade Sjafruddin, *Bandung Institute of Technology, Indonesia*

EDITORS

Antoni, *Petra Christian University*
Ima Muljati, *Petra Christian University*
Djwantoro Hardjito, *Petra Christian University*

ORGANIZING COMMITTEE

Chairman

Djwantoro Hardjito, *Petra Christian University*

Vice-Chairman

Rudy Setiawan, *Petra Christian University*

Members

Ima Muljati, *Petra Christian University*

Antoni, *Petra Christian University*

Gogot Setyo Budi, *Petra Christian University*

Jack Widjajakusuma, *Universitas Pelita Harapan*

Wiryanto Dewobroto, *Universitas Pelita Harapan*

Anastasia Yunika, *Universitas Atma Jaya Yogyakarta*

Johanes Januar Sudjati, *Universitas Atma Jaya Yogyakarta*

Daniel Tjandra, *Petra Christian University*

Wong Foek Tjong, *Petra Christian University*

Cilcia Kusumastuti, *Petra Christian University*

Sandra Loekita, *Petra Christian University*

Pamuda Pudjisuryadi, *Petra Christian University*

Paravita Sri Wulandari, *Petra Christian University*

Effendy Tanojo, *Petra Christian University*

Ratna S. Alifen, *Petra Christian University*

Indriani Santoso, *Petra Christian University*

Irwan Tanuadji, *Petra Christian University*

Sri Megawati Hermanto, *Petra Christian University*



ScienceDirect®

Procedia Engineering

Open access

Menu



Search in this journal

Civil Engineering Innovation for a Sustainable

Edited by Antoni, Ima Muljati, Djwantoro Hardjito

Volume 125,

Pages 1-1156 (2015)

[← Previous vol/issue](#)

[Next vol/issue >](#)

Editorial *Open access*

Preface

Antoni, Ima Muljati, Djwantoro Hardjito

Pages 1-4

[↓ Download PDF](#)

Research article *Open access*

Performance-based Contracting for Roads – Experiences of Australia and Indonesia

Reini Wirahadikusumah, Betty Susanti, Vaughan Coffey, Charles Adighibe

Pages 5-11

FEEDBACK



[Download PDF](#) Article preview

Research article *Open access*

Impact of Concrete Quality on Sustainability

Gideon H. Kusuma, Johannes Budidarmawan, Ani Susilowati
Pages 754-759

[Download PDF](#) Article preview

Research article *Open access*

Mechanical Properties of Seashell Concrete

Monita Olivia, Annisa Arifandita Mifshella, Lita Darmayanti
Pages 760-764

[Download PDF](#) Article preview

Research article *Open access*

Application of Coconut Fibres as Outer Eco-insulation to Control Solar Heat Radiation on Horizontal Concrete Slab Rooftop

Danny Santoso Mintorogo, Wanda K Widigdo, Anik Juniwati
Pages 765-772

[Download PDF](#) Article preview

Research article *Open access*

The Impact of Using Fly Ash, Silica Fume and Calcium Carbonate on the Workability and Compressive Strength of Mortar

Antoni, Lucky Chandra, Djwantoro Hardjito
Pages 773-779

[Download PDF](#) Article preview

Evidence Based Nursing Paper

Hindawi
Op

Procedia Engineering

COUNTRY

Netherlands

Universities and research institutions in Netherlands

Media Ranking in Netherlands

SUBJECT AREA AND CATEGORY

Engineering
└ Engineering (miscellaneous)

PUBLISHER

Elsevier BV

H-INDEX

103

PUBLICATION TYPE

Conferences and Proceedings

ISSN

18777058

COVERAGE








2009-2019

INFORMATION

[Homepage](#)

SCOPE

Information not localized

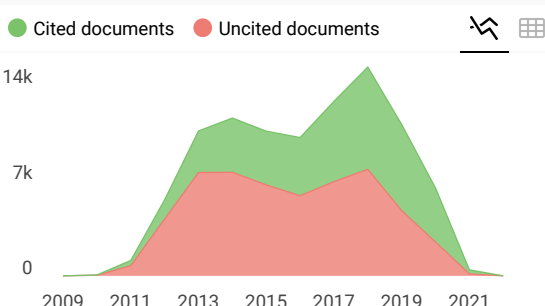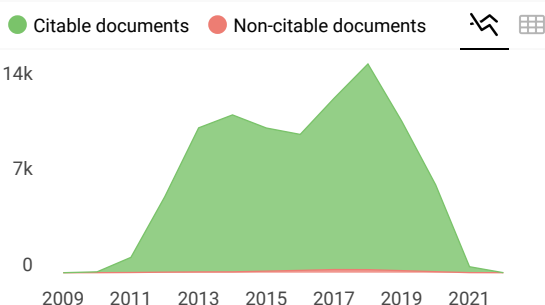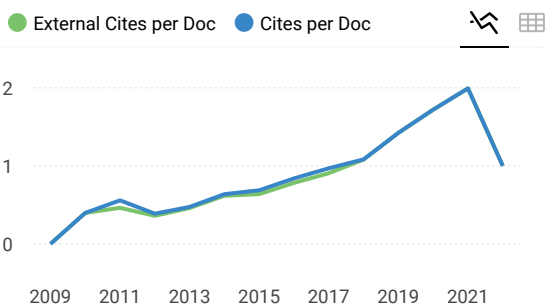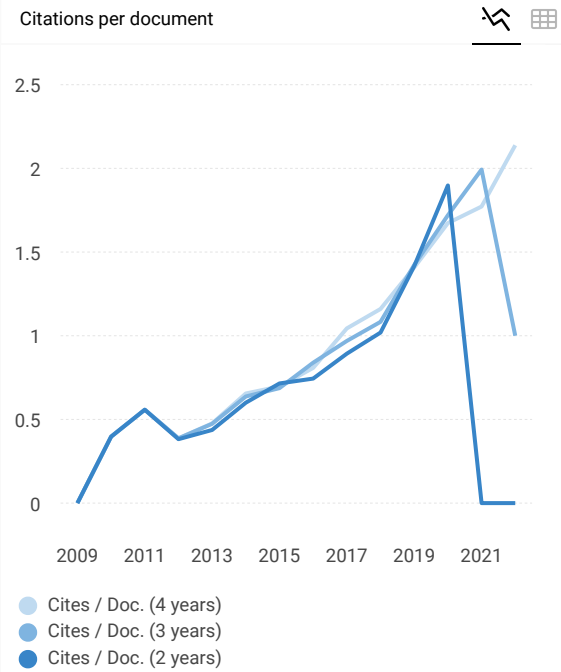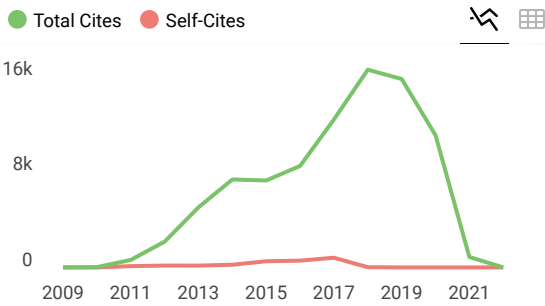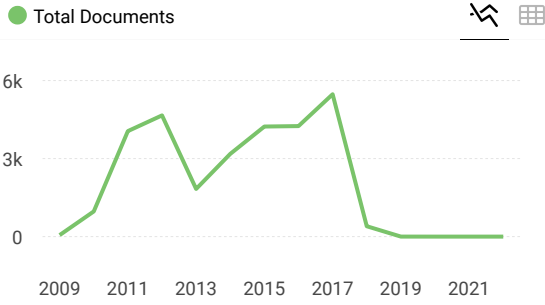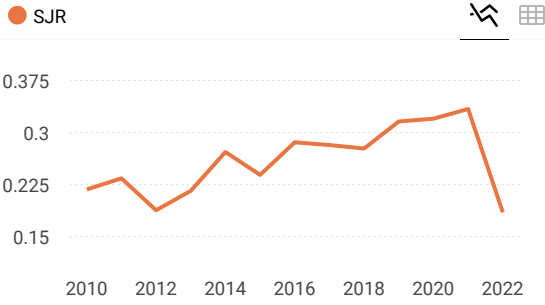

Procedia Engineering

Not yet assigned quartile

SJR 2022
0.19

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com" style="display: inline-block; width: 100px; height: 15px; background-color: #ccc; border: 1px solid #000;">
```



Source details

Procedia Engineering

Scopus coverage years: from 2009 to 2019

(coverage discontinued in Scopus)

ISSN: 1877-7058

Subject area: Engineering: General Engineering

Source type: Conference Proceeding

CiteScore 2020

4.0



SJR 2022

0.185



SNIP 2022

0.000



[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Source Homepage](#)

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

i Improved CiteScore methodology



CiteScore 2020 counts the citations received in 2017-2020 to articles, reviews, conference papers, book chapters and data papers published in 2017-2020, and divides this by the number of publications published in 2017-2020. [Learn more >](#)

CiteScore 2020

$$4.0 = \frac{23,216 \text{ Citations 2017 - 2020}}{5,804 \text{ Documents 2017 - 2020}}$$

Calculated on 05 May, 2021

CiteScore rank 2020

Category	Rank	Percentile
Engineering		
General Engineering	#57/297	80th

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site](#)

The 5th International Conference of Euro Asia Civil Engineering Forum (EACEF-5)

Application of coconut fibres as outer eco-insulation to control solar heat radiation on horizontal concrete slab rooftop

Danny Santoso Mintorogo^{a,*}, Wanda K Widigdo^a, Anik Juniwati^a

^aDepartment of Architecture, Petra Christian University, Jalan Siwalankerto 121-131, Surabaya 60235, East-Java, Indonesia

Abstract

Many countries alongside equator will experience excessive solar radiation, regardless the top and four sides of the buildings' surfaces. Due to the modern architectural concept and fast growing industry and economic, hundreds of rows of two-to-three-story shops and office houses have been built on the central business districts. Those buildings built are equipped with flat bare and uninsulated concrete rooftop. Only few of flat rooftops are equipped with numerous un-eco-insulation developed in the world such as asphalt roll membranes, single-ply rubber membranes, Ethylene Propylene Diene Monomer (EPDM), and Thermoplastic Polyolefin. This paper deals with the use of coconut fibres to build thermal insulation on concrete slab roofings and the experimental measurements of roof surface and indoor air temperatures derived from dynamic climatology of solar radiation. Monthly average temperatures on rooftop concrete slab and room air temperatures were conducted. Coconut fibres will be considered as natural sustainable insulator with the following aspects: practicing to respect natural materials within the built environment, promoting less hazardous roofing insulation of the material used, limiting the impacts on the urban-built atmosphere, and preserving cooling energy demand by mitigating the flat concrete rooftop thermal onto the room. The room air thermal saving covered by coconut fibres is around 2.8° – 3.1°C different, and the rooftop surface thermal saving with coconut fibres is 13°C different, compared to conventional bare concrete slab roofings. The energy consumption reduction is around 3% (average) and 9% (maximum).

© 2015 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of organizing committee of The 5th International Conference of Euro Asia Civil Engineering Forum (EACEF-5)

Keywords: Coconut fibres; eco-friendly insulation; solar radiation; concrete flat slab roofing.

* Corresponding author. E-mail address: dannysm@petra.ac.id


1. Introduction

Over the past decade, the economy in Asia-Pacific has been growing fast; Indonesia with Jakarta as capital city also acquired lots of places for dealing with the economic-growth demand such as low, middle and high-rise office buildings. One of the favorite types for dealing business places is *Ruko* or *Rukan*; it is a kind of landed houses with one to three story-building called shop-house or office-house. Most of these shop-office houses finish the rooftop with flat bare concrete, and these flat concrete rooftops mostly are not covered with outer insulation in order to perform as a heat barrier to solar radiation during the day. Other cities also have the same system for those shop-office houses in the central business districts (see Fig. 1a and Fig. 1b). Surabaya is the second largest city after Jakarta in Indonesia. Surabaya, situated at latitude $7^{\circ} 17-21'$ South and longitude $112^{\circ} 47'$ East, has a tropical warm humid climate zone throughout the year. It has two seasons; the dry season from May to November and the rainy season from December to May. Based on three local weather stations climatic data from 1993 to 2005: J (airport zone—Southern areas), P1 (center city—center areas), P2 (harbor zone—Northern areas), the maximum average dry-bulb outdoor temperatures stretches from 33° to 35°C , and the minimum average web-bulb outdoor temperatures ranges from 22° to 24°C (Table 1) [1].

Plenty of horizontal exposed concrete rooftops on every shop-office houses, which mostly have been equipped with air conditioning system will cause extra millions of Watt-hour of cooling load penetrated from the rooftop into the rooms due to the high intensity of solar radiation in Surabaya. There are several facts of horizontal concrete roofs of shop and office houses in Surabaya, such as: 1) uncovered rooftop surfaces, 2) high intensity of horizontal solar irradiance.



(a)

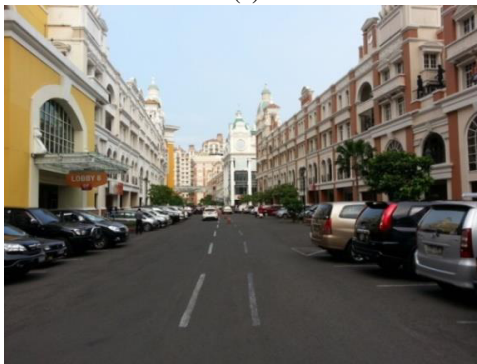

(b)

Fig. 1. (a) Rows of flat concrete rooftops of shop-office houses; (b) Rows of front image of shop-office houses in business complex

Table 1. Maximum and minimum average outdoor temperatures 1993-2005

Month	1993		1995		1996		1997		1998		1999		2001		2002		2003		2004		2005	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
1	33.2	23.3	34.3	23.1	33.2	23.5	33.3	23.2	36.1	23.8	33.0	23.2	34.4	23.2	34.2	21.7	35.2	22.7	34.3	22.9	33.3	24.6
2	33.5	23.2	33.6	23.0	32.9	23.3	34.0	24.3	34.7	23.3	33.3	23.5	34.4	23.4	33.6	23.3	33.9	22.9	33.9	23.2	33.2	23.9
3	32.7	23.9	33.6	22.4	33.7	23.5	34.4	23.1	35.2	23.9	33.4	23.3	34.3	22.9	34.6	23.1	34.7	22.2	34.7	23.2	33.3	24.3
4	32.9	24.0	34.3	22.6	33.9	23.7	33.6	23.6	35.2	24.4	33.3	23.9	34.3	23.4	34.8	23.4	34.9	23.9	34.8	23.8	32.6	24.3
5	33.2	24.3	33.9	22.7	33.6	22.4	33.7	23.5	34.4	24.2	32.9	23.4	34.3	22.0	34.0	23.3	34.2	22.6	34.2	22.5	32.6	24.6
6	32.8	23.6	33.8	23.0	32.8	23.7	32.7	21.2	33.7	24.1	33.2	23.6	33.2	22.2	33.8	21.5	33.6	21.0	33.7	21.5	32.5	24.5
7	32.7	21.3	33.1	21.1	33.0	22.2	32.9	20.0	33.4	23.5	32.0	22.1	32.8	19.7	33.7	20.9	33.5	20.2	33.6	21.3	32.0	22.9
8	32.3	22.2	33.0	20.8	33.3	22.1	32.0	20.0	34.1	23.0	33.0	21.2	33.1	20.6	33.2	20.0	34.0	19.8	33.4	20.3	32.4	22.7
9	33.6	22.5	34.9	21.6	34.7	22.9	34.3	21.1	34.7	22.0	33.8	20.8	35.2	22.9	34.1	21.5	35.6	20.1	34.5	21.5	33.6	24.2
10	35.3	23.5	35.6	22.6	35.3	23.9	36.4	20.1	34.6	23.9	34.7	22.7	35.4	23.5	36.9	21.9	36.3	22.9	36.7	22.3	34.4	24.0
11	35.3	24.2	35.4	22.9	34.9	23.5	36.3	22.9	34.5	24.0	33.8	23.7	35.3	23.5	36.8	23.3	37.0	22.5	37.0	23.1	34.5	23.8
12	34.5	23.8	34.0	22.8	34.1	23.7	36.0	23.6	34.8	23.7	33.8	23.7	34.2	23.1	35.9	23.3	34.7	22.9	35.3	23.0	32.7	23.9
Ave	33.5	23.3	34.1	22.4	33.8	23.2	34.1	22.2	34.6	23.7	33.4	22.9	34.2	22.5	34.6	22.3	34.8	22.0	34.7	22.4	33.1	24.0

Source : Surabaya Weather Station, (1993-2005)

1.1. Surface exposed

Low-rise building of shop-houses are built in rows, and it is only the front facade that is exposed to the weather, and is impacted by the solar irradiation. The rooftop portion of the shop-houses definitely suffer from lots of solar irradiation. Fig. 2 indicates that rooftops are the biggest portions of the building that transmit thermal solar irradiation into the building, which is around 35%. The total front facade elements (walls, doors, and windows) only contribute around 34% of the thermal loads to room. Meanwhile, the integrated interior components (occupants, equipment, lighting, and floor) contribute roughly 31% of the thermal (Fig. 2).

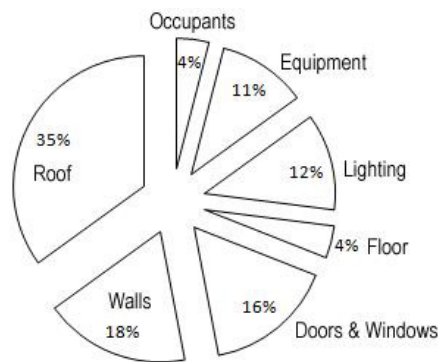


Fig. 2. Thermal transmitted resources to building percentage (image source: Tippins, 2009)

1.2. High intensity of solar irradiance

Because Surabaya is located at latitude 7° 17' - 21°. It is near to the equator and has the typical warm and humid tropical zone weather. That is why the solar radiation intensity is higher than the locations in subtropical zone. Tropical regions have two seasons, which are dry and rain season. During the dry seasons, the average horizontal global solar irradiance in 2008 was 397 W/m². At the present time, the solar irradiance is only 302 W/m² in rainy seasons (Table 2). Assuming that one unit rooftop shop-house has around 100 m² (5x20 m), the thermal irradiance impact to room is 40 kW per hour.

Table 2. Daily average horizontal global solar radiation per month per year (W/m^2)

Dry seasons	2007	2008	2009	Rainy seasons	2007	2008	2009
May	335	369	292	January	349	327	306
June	316	360	337	February	335	255	268
July	252	382	357	March	280	297	339
August	408	414	384	April	363	357	337
September	443	415	409	November	408	304	344
October	446	440	424	December	306	271	321
Average	383	397	367	Average	340	302	319

Source:author

1.3. Non Eco-friendly roof insulated material

There are lots of insulation used for rooftops, either for the outer or inner side of the flat and tilt roofs. However, most of them are still chemical-base. Modern countries are used to apply roofing membranes with thermoplastic polymer-basedas insulation materials such as PVC, TPO (thermoplastic polyolefin). Others built up roofing membranes applied to horizontal rooftop, like Ethylene Propylene Diene Monomer-based coating (white roll membranes) (Fig. 3a), and elastomeric-based coatings (single-ply rubber membranes). More up to date roll insulation material is 10 mm thick of glasswool (packed with aluminium foil on both sides (Fig. 3b). Among those chemical-based insulation materials, PVC is the most expensive and durable, with long-term performance [2].



Fig. 3. (a) Roll of white EPDM membrane; (b) Roll of glasswool-aluminium foils outer roof insulation

2. Related literatures

The efforts to control solar heat radiation on horizontal roofs are different, depending on the era. They vary from earth shelters (ancient era), chemical insulations (industrial era), and cool roofs, green roofs, and roof ponds (modern era), as well as eco-friendly insulations (sustainable eco-friendly built environment era).

Horizontal roofs are evolving in physical forms and functions in accordance with the attempts of controlling the heat solar radiation and providing solutions for the humidity problem (weather) [3].

Cool roofs, green roofs, and roof ponds are perfect to be considered as sustainable roofing systems to control the heat gain on flat concrete rooftop. Applying cool roof relies on the high percentages of roof color's reflectance. It gains greater benefits in the daytime energy performances by lessening cooling energy loads. Meanwhile, green roofs have more steady surface temperatures than cool roofs because of the layers of substrate, and the growing thickness of the medium [4]. Generally, a cool roof is formed by simply applying a highly reflective roof material and light color over an existing rooftop but not always, since darker colors are the new invention of cool colors' roofing materials [5]. Customarily, a cool roof is appropriate for a warm and humid climate. It will not experience a 'winter heat penalty' (required heating loads) like it is in four-season climate countries, which have moderate to severe winter climate. A cool roof created with conventional ways always relies on bright white or other lighter roof

color materials, which reflect 95% of solar radiation onto the range of visible light and near-infrared heat [6]. Oftenly, the white cool roof can reflect 75% and emit 92% of total sun heat energy into space, leaving the rooftop surface dry-bulb temperature on 49°C. Conventional flat concrete rooftops can reach to about 60° to 70°C [7].

Meanwhile, the surface dry-bulb temperature of a built-up asphalt roof, white PVC-covered roof membrane, and green roof can reach up to 70°C, 38°C, and 32°C respectively, during the typical summer hot day [8]. Green roofs speciality performance tested by Puay Yok Tan and Angelia Sia [9]. They reported at Rooftops for Sustainable Communities conference that the green roof test of multi-story car park projected 5 – 10 cm of growing soil layer to 25 cm of bare exposed flat concrete rooftops. The 25 cm concrete roof covered with a green roof leads to 15° - 20°C cooler surface temperature on the concrete green rooftop than on the bare adjacent concrete surface.

A roof pond is a passive cooling roof, considered to have greater cooling and heating energy savings within 24-hour cycles of particular climatic seasons —summer and winter. Numerous measurements on roof pond roofing passive cooling techniques, like wind driven roof pond, fastening cooling water pond, and water-pipes based roof pond, are proved to lessen the heat on flat concrete rooftop. The water-pipe based roof pond system experiences 1.4°C cooler dry-bulb room temperature than a regular roof pond, and 4.4°C cooler than a conventional surface concrete rooftop temperature [10]. Meanwhile, the wind pipes system experiences 0.4°C cooler room temperature than a regular roof pond, and 3.4°C cooler surface temperature than a conventional concrete rooftop [11].

Coconut fibres could be used in the construction field of civil engineering as a reinforcement composite concrete with portland cement, fine agg, coarse agg and water. The adding of the coconut fibres in composite concrete significantly enhances the properties of the concrete in terms of its tensile strength, torsion, and hardness. However, the segment percentages of coconut fibres in the composite concrete undesirably affect the concrete compressive strength [12, 13 & 14]. Another function of coconut fibres is to overlay the top of concrete slab. It can discharge solar radiation thermal in order to improve the indoor thermal. Rodriguez et al. [15] applied FEM analysis on coconut fibre to find its thermal conductivity and layering position on concrete slab, like on the top or inner concrete slab. The coconut thermal conductivity of k is 0.048 W/m.K, with density of 174 kg/m³, and heat capacity of 2600 J/KgK. Coconut fibres on the top of concrete slab are better as a thermal insulator than on the inner of the concrete slab [15].

3. Methodology

The research is a quantitative experimental work measured in situ at Petra Christian University two-story building rooftop, with two-model experiment, and coconut fibres as an eco-insulation to flat concrete rooftop materials. Natural coconut fibres were obtained from the coconut, and the coconut fibres were laid down over the concrete rooftop model (Fig. 4c).

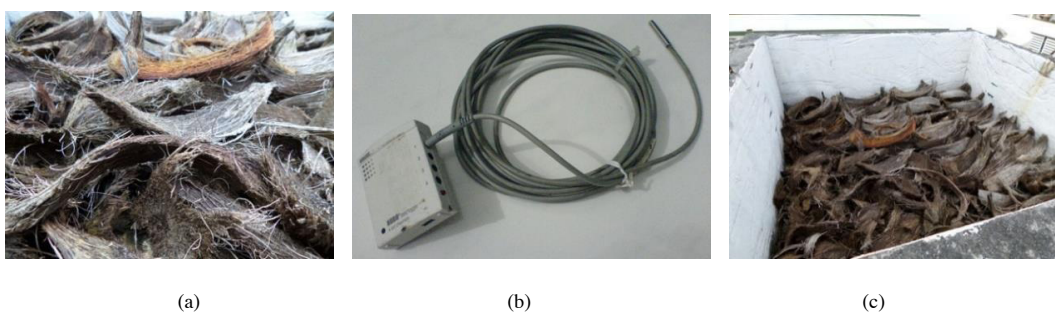


Fig. 4.(a) Original coconut fibres, (b) HOBO U12 with thermocouple probe, (c) Coconut fibres in the test-model (Source: author).

The test model has a dimension of 100 x 100 x 100 cm, and the bottom of the model was lifted 50 cm above the ground. The top roof model was made of a 6 cm thick flat concrete (Fig. 5a). The measurement tools were data logger with thermocouple probes from HOBO U12 produced by Onset USA. We used 3 pairs of HOBO U12 during the test (Fig. 4b).

The measurements were calculated with two models simultaneously from May to July 2014, one model acted as the reference model (original flat concrete rooftop), and another rooftop model was covered with 5-cm coco fibres (one layer only) as a starting point. Other possibilities of layerings test (10 cm, 15cm, 20cm and so on) will be done in the incoming research (Fig. 4c). The measurement was done in dry mode only. The HOBO data loggers were adjusted to record all temperatures for every 10 minutes and went on for three months (May to July 2014). The research was scheduled to start in May due to the time constructing of the models and ended to July. Subsequently, the data from data loggers were interpreted in monthly average in order to complete the graphs in Microsoft excel.

The technical data of the coco fibres are in terms of the loads in dry mode and wet mode. The dry-load of the coco fibres with a covered dimension of 1m x 1m x 0.05 m (0.05 m²) is about 1.56 kilogram. The wet coco fibres load is around 3.05 kilograms.

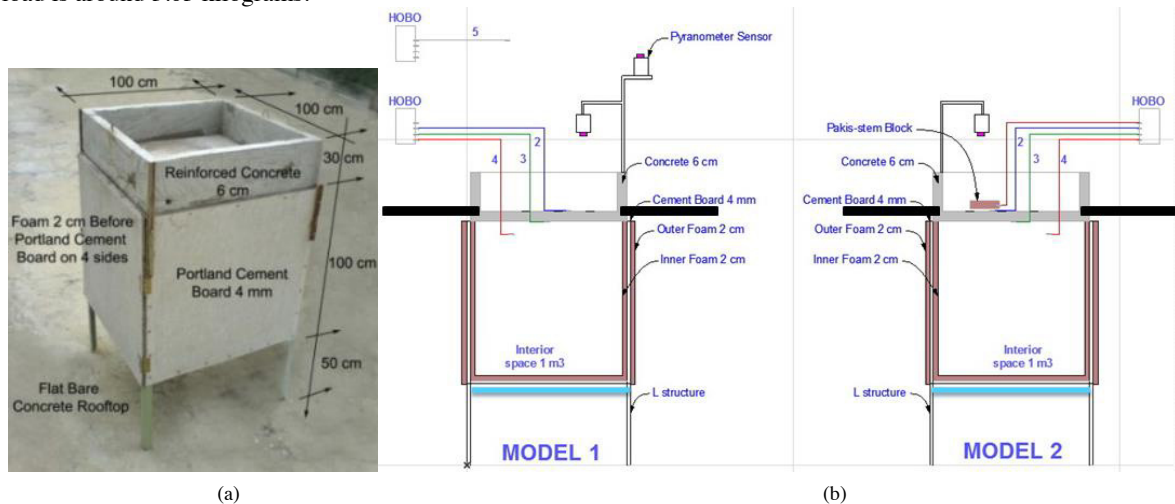


Fig. 5. (a) A built-up model with flat concrete rooftop, (b) Processing figures of models and tools (Source: author).

4. Results and discussions

All temperatures data (surface rooftop and room model) were required to accumulate an hourly average format before obtaining a 24-hour graph of rooftop surface and room thermal.

The concrete roof surface temperature on reference model reached 41.8°C at noon. The roof concrete surface covered with coconut fibres was only 28.7°C at 12 noon. Therefore, there was a thermal surface gap on daytime period (6 am to 6 pm), roughly 13°C, 12°C, 7°C and 3°C respectively in the afternoon (2 pm, 4 pm, and 6 pm) (Fig. 6). At nighttime (6 pm – 6 am), the reference roof surface temperature released the stored-heat at the flat concrete roof faster than the coconut fibres rooftop. The time when the rooftop and coconut fibres rooftop discharged stored-heat started around 10 pm – 6 am. The average roof surface temperature is 26.9°C, and the coconut fibres rooftop have an average roof surface temperature of 27.5°C (Fig 8). Therefore, the coconut fibres rooftop needed a longer time to release roof-surface-concrete radiated heat to the cool night sky radiation due to the coconut fibres covering the top of the concrete roof.

The maximum indoor room air temperature on reference model reached 35.5°C at 2 pm. On the other hand, concrete surface covered with coconut fibres model only had maximum temperature of 32.4°C. It was 3.1°C cooler than reference model at the hottest afternoon (2 pm) (Fig. 7). Looking at the afternoon time, the indoor room air temperature of coconut fibres rooftop model was 2.8°C different compared to room air temperature of reference model. The average daytime dry-bulb indoor room air temperature on coconut fibres rooftop was 30°C, and the flat bare concrete rooftop had an average dry-bulb room air temperature of 31.2°C. So, the different between daytime and nighttime average indoor room air temperature to reference room air model was 1.2°C and 0.8°C respectively (Fig. 9). The coconut fibres rooftop had good daytime performances, but conventional bare concrete rooftop was better in releasing the roof thermal heat at nighttime than any other rooftop insulations.

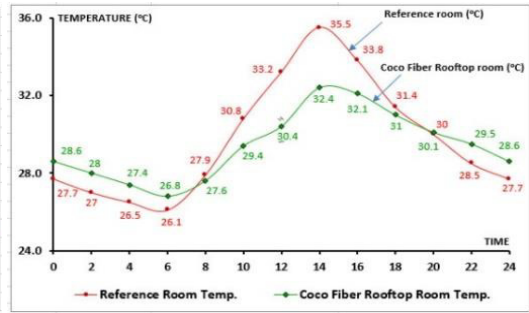
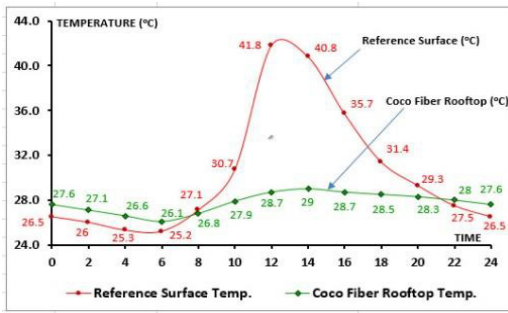


Fig. 6. Roof surface heat fluxes 24-hour average May-July 2014

Fig. 7. Indoor room air temperatures 24-hour average May-July 2014

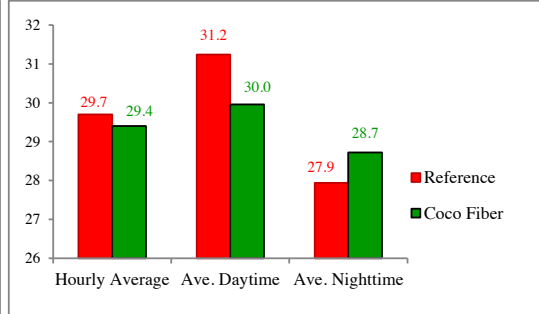
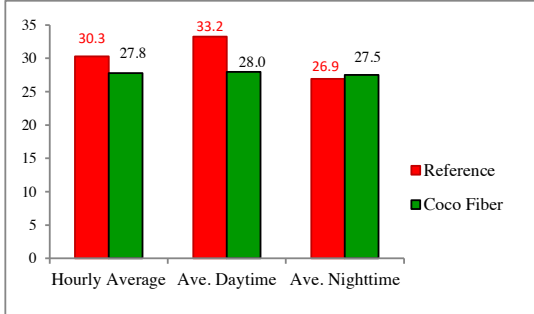


Fig. 8. Average surface temperatures May-July 2014

Fig. 9. Indoor average room air temperatures May-july 2014

In order to have a better understanding of outer insulation performances on flat bare concrete rooftop, there are several types of outer insulations that covered the top of the horizontal bare concrete rooftop. Table 3 shows coconut fibres covered on horizontal bare rooftop had the lowest average room air temperature among other applications. The room air temperature was 0.4°C cooler than the conventional bare concrete roof (done in another research done at different time, location and climate). The room air temperature was also 0.4°C different compared to the changeable media green roof test that was measured on the same location but at a different time of the year.

Table 3. Various types of thermal fluxes on rooftops and insulations

Application of rooftops	Average rooftop surface temperature (°C)	Average room air temperature (°C)	References
Coconut fibres rooftop	27.8	29.4	Mintorogo, 2014
Cool roof (white painted) rooftop	34	-	Carnielo et al., 2011
Metal rooftop	60 -70	-	Wong and Chen, 2006
Green roof - intensive style	38	-	Wong and Chen, 2006
Roof pond rooftop	36.9	32.5	Mintorogo and Widigdo, 2010
Water pipes roof pond	37.3	32.3	Mintorogo and Widigdo, 2011
Wind pipes roof pond	35.2	34.6	Mintorogo and Widigdo, 2012
Pakis stem block insulated rooftop	29.8	30.9	Mintorogo, 2014
Styrofoam insulated rooftop	31.4	31	Mintorogo, 2014
Yumen Board	34.3	32	Mintorogo, 2014
Changeable media green roof	29.3	29.8	Aditya, 2014
Eggshell rooftop	32.3	31.1	Suryadi, 2014

5. Conclusions

Looking at Fig. 6 and Fig. 7, as well as table 3, several points about coconut fibres as outer insulation on horizontal rooftop can be concluded:

1. Concrete rooftops covered with coconut fibres have lower surface heat fluxes during the daytime and are faster to release the stored heat due to the natural perforating material of coconut fibres.
2. Coconut fibres rooftops experience a lower indoor air temperature during the daytime but not at the nighttime.
3. Coconut fibre is a natural material, therefore it decomposes faster and more easily. It pertains a clean built environment.
4. Coconut fibres can be recycled as a natural material.
5. Coconut fibres can be introduced as an insulation to flat concrete rooftops besides straw and fibre reeds.
6. We practice to respect the use of more natural materials for the buildings.

Speaking for energy savings domain, the coconut fibres rooftop can reduce an average indoor air temperature up to 1.2°C, and the indoor room air temperature up to 3.1°C at 2 pm. According to Kam M.S. [16], the cutback of electricity utilization in the air-conditioning equipment is roughly 3% for every increasing/reducing of room air temperature of 1°C (a mock-up of the energy use of a standard office building in Hong Kong with central air-conditioning system). Therefore, the coconut fibres insulation on a flat bare concrete rooftop could save an energy consumption to around 3% (average) and 9% (maximum).

Acknowledgements

The author would like to thank to the Head of Architecture Department, Petra Christian University Surabaya for funding the research and measurement tools.

References

- [1] Surabaya Weather Station, 1993-2005
- [2] B. Tippins, EPDM roofing systems: a strong, energy-efficiency option, 2009.
- [3] ST. Vasiliu, Evolution of flat roof, Buletinul Institutului Politehnic Din Iasi, J.Tomul. LV 4 (2009) 71-80.
- [4] M. Magallanes, Cool roof and photovoltaics: an unlikely pair. FMJ report, July-August (2011) 42-45.
- [5] N. Garrison, C. Horowitz & C.A. Lunghino, Looking up: how green roofs and cool roofscan reduce energy use, Adress climate change and protect water resources in southern California, NRDC report, New York, 2012.
- [6] S.J. Konopacki & H. Akabri, Measured energy savings and demand reduction from a reflective roof membrane on a large retail store in Austin, BLNL-47149, Berkeley, CA, 2001.
- [7] N.H. Wong & Y. Chen, A comparison of two rooftop systems in the tropical climate, Proceeding of the iNTA^{2nd} Harmony in culture and nature, Indonesia, 2010, B14, 1-8.
- [8] J. Richie, Green roof and walls, Presentation to Ontario congress, GRHC, 2012.
- [9] P.Y. Tan & A. Sia, A pilot green roof research project in Singapore, Proceeding of the third annual greening rooftop for sustainable community conference, Washington DC, USA, 2005.
- [10] D.S. Mintorogo & W. Widigdo, Water-pipes based roof pond reduce thermal flat concrete rooftop, Research Project at Petra Christian University, Surabaya. 2011.
- [11] D.S. Mintorogo & W. Widigdo, Wind-driven roof pond fastened cooling effects of water pond in tropical climate of Surabaya, Research Project at Petra Christian University, Surabaya. 2012.
- [12] P.P. Yalley & A.S.K. Kwan, Uses of coconut fibres as a enhancement of concrete, Cement and concrete composite, *Indian coconut journal*, **15**, 54-73, 2009.
- [13] A. Majid, Coconut fibre – a versatile material and its applications in engineering, available online: <http://www.claissse.info/2010%20papers/k13.pdf>.
- [14] R. Sabah M., M. Ansari & M. Saleh H., A study on mechanical, thermal and morphological properties of natural fibre/epoxy composite, *Design for scientific renaissance*, **1**(5), 267-296, July 2012.
- [15] N.J. Rodriguez et al., Assessment of coconut fibre insulation characteristics and its use to modulate temperatures in concrete slabs with the aid of a finite element methodology, *Energy and buildings*, **43**, 1264-1272, 2011.
- [16] M.S. Kam, 25.5 deg C and human comfort, Report energy and efficiency office, the government of Hong Kong special administrative region, 2004.