

Environmental Science and Engineering

Series Editors

Ulrich Förstner, Buchholz, Germany

Wim H. Rulkens, Department of Environmental Technology, Wageningen,
The Netherlands

The ultimate goal of this series is to contribute to the protection of our environment, which calls for both profound research and the ongoing development of solutions and measurements by experts in the field. Accordingly, the series promotes not only a deeper understanding of environmental processes and the evaluation of management strategies, but also design and technology aimed at improving environmental quality. Books focusing on the former are published in the subseries Environmental Science, those focusing on the latter in the subseries Environmental Engineering.

Yang Zeng · Shuguang Wang
Editors

Environmental Science and Technology: Sustainable Development II

 Springer

Editors

Yang Zeng
Department of Environmental Engineering
School of Environmental Science
and Engineering
Shandong University
Qingdao, China

Shuguang Wang
Department of Environmental Engineering
School of Environmental Science
and Engineering
Shandong University
Qingdao, China

ISSN 1863-5520 ISSN 1863-5539 (electronic)
Environmental Science and Engineering
ISBN 978-3-031-54683-9 ISBN 978-3-031-54684-6 (eBook)
<https://doi.org/10.1007/978-3-031-54684-6>

© The Editor(s) (if applicable) and The Author(s), under exclusive license to Springer Nature Switzerland AG 2024

This work is subject to copyright. All rights are solely and exclusively licensed by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, expressed or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Switzerland AG
The registered company address is: Gewerbestrasse 11, 6330 Cham, Switzerland

Paper in this product is recyclable.

Conference Committees

Honorary Chair

Gordon Huang, University of Regina, Canada

Conference General Chair

Shuguang Wang, Shandong University, China

Conference Co-Chair

Yongping Li, Beijing Normal University, China

Organizing Committee Chairs

Xianzheng Yuan, Shandong University, China

Xiaodong Zhang, Shandong University, China

Technical Program Committee

Caterina Valeo, University of Victoria, Canada

Weiguo Fang, Beihang University, China

Sunil Heart, Griffith University, Australia

Lovorka Gotal Dmitrović, University North, Croatia

Publicity Chair

Henrique J. O. Pinho, Instituto Politécnico de Tomar, Portugal

Publication Chair

Yang Zeng, Shandong University, China

Technical Committee

Radu Godina, NOVA University Lisbon, Portugal
J. Helan Chandra, Jeppiaar Engineering College, Chennai, India
Dina M. R. Mateus, Instituto Politécnico de Tomar, Portugal
Kailas Deoram Ahire, K.R.T. Arts, B.H. Commerce and A.M. Science (KTHM)
College, Nashik, India
V. Ramadas, Sivakasi Madurai Kamaraj University, Madurai, India
Fengmin Wu, Chongqing Geomatics and Remote Sensing Center, China
Muhammad Jawad Sajid, Xuzhou University of Technology, China
Weiguo Fang, Beihang University, China
Lovorka Gotal Dmitrović, University North, Croatia
Jinliang Liu, York University, Canada
Nguyen Xuan Cu, VNU University of Science, Hanoi, Vietnam
Henrique J. O. Pinho, Instituto Politécnico de Tomar, Portugal
Svetla Tzvetkova, University of National and World Economy, Bulgaria
LU Wei-Zhen Jane, City University of Hong Kong, Hong Kong
Bogdan Zygmunt, Gdansk University of Technology, Poland
James T. Anderson, West Virginia University, USA
Guangwei Huang, Sophia University, Tokyo, Japan
Caterina Valeo, University of Victoria, Canada
Shuguang Wang, Shandong University, China
Suiliang Huang, Nankai University, Tianjin, China
Grigorios L. Kyriakopoulos, National Technical University of Athens (NTUA),
Greece
Dat Doan, Auckland University of Technology, New Zealand
Mohammad Arif Kamal, Aligarh Muslim University, India
Jianxun He, University of Calgary, Canada
Jing Zhao, Guangdong University of Science and Technology, China

Manoj Chandra Garg, Amity University, India
Zhi-Cheng Dong, Jiaying University, China
Willyanto Anggono, Petra Christian University, Indonesia
Sheng Huang, Shanghai Municipal Engineering Design and Research Institute
(Group) Co., Ltd
Chao Li, Northeast Normal University, China
Baba Imoro Musah, Chinese Academy of Sciences, China
Xuecheng Chen, West Pomeranian University of Technology, Poland
Dongmei Zhang, Northeast Normal University, China
Fangfang Cao, Shandong Ecology and Environment Monitoring Center, China
Jinmei Lu, The Arctic University of Norway, Norway
Hooi Carol Lai-Wan, Ritsumeikan Asia Pacific University, Japan
Edilson Ueda, Chiba University, Japan
Huanghu Peng, Huzhou University, China
Xiang Li, Beijing Institute of Technology, China

Preface

2023 14th International Conference on Environmental Science and Technology (ICEST 2023) was held successfully both in Shandong University, Qingdao, China, and online during 23–25 November 2023. ICEST 2023 has brought together innovative academics and industrial experts in the field of Environmental Science and Technology to a common forum.

At the beginning of the conference, Prof. Zhanjun Xing from Shangdong University, China, Prof. Gordon Huang from University of Regina, Canada, and Mr. Ning Zhang from China International Center for Economic and Technical Exchanges, China, have delivered the opening speeches. The conference chair Shuguang Huang from Shangdong University, China, hosted the opening session. Then distinguished professional Prof. Xi Chen from Tianjin University, China, Prof. Yongping Li from Beijing Normal University, China, and Prof. Caterina Valeo from University of Victoria, Canada, were invited to give keynote speeches. Moreover, there were five invited speeches from Prof. Xuecheng Chen from West Pomeranian University of Technology, Poland, Assoc. Prof. Xiang Li from Beijing Institute of Technology (BIT), China, Assoc. Prof. Chao Li from School of Environment Northeast Normal University, China, Prof. Willyanto Anggono from Petra Christian University, Indonesia, and Prof. Yuchun Wang from China Institute of Water Resources and Hydropower Research, China. In addition, the conference welcomed around 60 leading environmental science and technology researchers, engineers and scientists from numerous countries, including Canada, Poland, Norway, Japan, Colombia, Oman, Algeria, Peru, Turkey, China, etc. All of them shared and discussed their recent research results in the respective environmental science and technology areas.

There were 5 onsite sessions in Shandong University, Qingdao, China: EWE Symposium: Integrated Water Management and Climate-Change Adaptation for Improved Resilience of Human Societies and Ecosystems; Environmental Technology and Application; Resources and Environmental Studies (1) & (2) and poster session. And there were two online sessions: Resources and Environmental Studies (3) & (4). Many researchers, engineers, academicians as well as industrial professionals from all over the world have presented their research results and development activities.

All papers were subjected to peer-review by conference committee members and international reviewers. The papers were selected on the basis of their high quality and relevancy to the conference. The selected papers were grouped per related areas and presented in 7 sections, including Ecological Environment Analysis and Environmental Pollution Control, Wastewater Treatment and Water Resource Management, Solid Waste Management and Waste Valorization, Clean Energy Technology and Energy Conservation, Environmental Health and Meteorology and Climate Change, Materials for Environmental Engineering and Sustainable Development.

We would like to express our great appreciation to the organizing committee, reviewers, speakers, chairpersons, sponsors and all the conference participants for what they have done to ICEST 2023. ICEST 2023 is a success with their participation and great support.

Qingdao, China

Prof. Yang Zeng
Publication Chair

Contents

Part I Ecological Environment Analysis and Environmental Pollution Control

1 Promoting Effect of Ni Addition on Cu-SSZ-13 Zeolites for NH₃-SCR	3
Min Li, Chong Chen, Weijuan Chen, and Yunqi Liu	
2 Characteristics of VOCs Pollution in the Atmosphere During Ozone Pollution in Taian	13
H. A. N. Wen-Jing, Zhang Feng-Ju, C. A. O. Fang-Fang, Y. O. U. Xi-Hua, and C. A. O. Yan-yan	
3 Dynamic Monitoring and Evaluation of Ecological Environment Quality of Shandong Peninsula Blue Economic Zone by Remote Sensing	25
Dehu Yang, Changming Zhu, Minxuan Luo, Xin Zhang, and Kun Zhang	
4 Evaluation of Environmental Impact of Aircraft Operation Noise at Nanjing Lukou International Airport	41
Di Yajing, Yang Lin, Xu Yiquan, and Min Hequn	
5 New Insights on ARS Degradation Mechanisms: Initial Reaction Calculation Based on DFT Method	53
Zhuwen Shao, Wenchun Jiang, and Huibo Meng	
6 Predicting the Change of CO₂ Emissions Using a BNN-FA Method: A Case Study of Hebei Province	65
Zhan Wang, Yongping Li, Guohe Huang, Zhipeng Xu, Panpan Wang, and Yanfeng Li	

- 7 Analysis of Soil Properties Under Different Landforms and Vegetation in Liangucheng National Reserve in Minqin, China** 75
Rui Wang, Cuiwen Tang, Yaning Wang, and Fanfan Li

Part II Wastewater Treatment and Water Resource Management

- 8 Designing for Sustainability: Strategies for Reducing Domestic Water Consumption** 91
Ueda Edilson
- 9 Toxic Metals Reduction in Acid Mine Drainage Through the Use of Calcium Carbonate: A Case Study in Canchayllo, Peru** 107
V. B. Enciso-Rondon, J. M. Guadalupe-Lazaro, P. L. Boza-Sullca, N. Tantavilca-Martinez, and S. L. Arcos-Chuquillanqui
- 10 The Effectiveness of Urban Water Loss Control and Their Implications for Rural Revitalization** 123
Yikai Jiang, Shihu Shu, Zhihui Chen, Weidong Yao, and Qiang Chen
- 11 Risk Assessment of Urban Flooding Using InfoWorks ICM Model: A Case Study of Tangxun Lake Watershed in Wuhan** 135
Sun Ling kai, Wang Jian, Xu Wangpeng, Gao Zhaobo, Xu Wei, and Zhang Shi
- 12 Scheme Analysis and Safety Guarantee Study on Urban and Rural Integrated Water Supply System in Mountainous Area** 157
Yuan Wenqi
- 13 Promoting Residential Organic Waste Separation: A Conceptual Framework** 169
Ueda Edilson

- 14 Briquette Combustion Characteristics of *Cerbera manghas* Leaves with Rejected Pineapple as Binding Agent as a Sustainable Fuel** 183
Willyanto Anggono, Resmana Lim, Teng Sutrisno, Ivan Christian Hernando, and Alexander Billy Christensen

Part III Solid Waste Management and Waste Valorization

- 15 MK3 Kiln Built with Construction and Demolition Waste to Mitigate PM_{2.5} and PM₁₀ in the Production of Handmade Bricks in Peru** 197
A. H. Contreras Perez, X. S. Navarro Soto, R. M. Perez Escobar, L. G. Gutiérrez Reyes, and J. V. Cornejo Tueros

Get Started with LinkedIn Ads

Learn why B2B Marketers choose LinkedIn over other social media platforms for paid media.

LinkedIn® Ads

[Learn](#)

Environmental Science and Engineering

COUNTRY

Germany



Universities and research
institutions in Germany



Media Ranking in Germany

SUBJECT AREA AND CATEGORY

Computer Science
Information Systems

Environmental Science
Environmental Engineering


PUBLISHER

Springer International
Publishing AG

H-INDEX

27



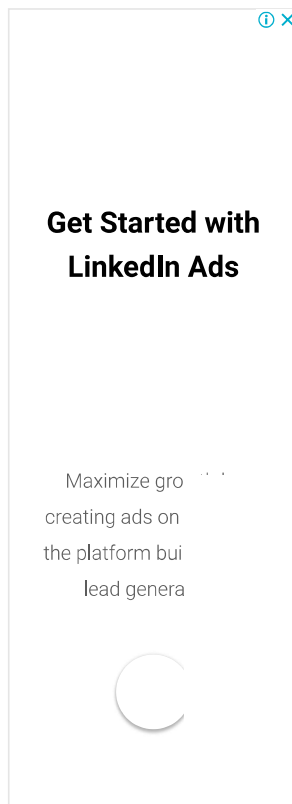

PUBLICATION TYPE

ISSN

COVERAGE

INFORMATION

Book Series

18635520, 18635539

2007-2023








[Homepage](#)





SCOPE

The ultimate goal of this series is to contribute to the protection of our environment, which calls for both profound research and the ongoing development of solutions and measurements by experts in the field. Accordingly, the series promotes not only a deeper understanding of environmental processes and the evaluation of management strategies, but also design and technology aimed at improving environmental quality. Books focusing on the former are published in the subseries Environmental [Science](#), those focusing on the latter in the subseries Environmental Engineering.

 Join the conversation about this journal



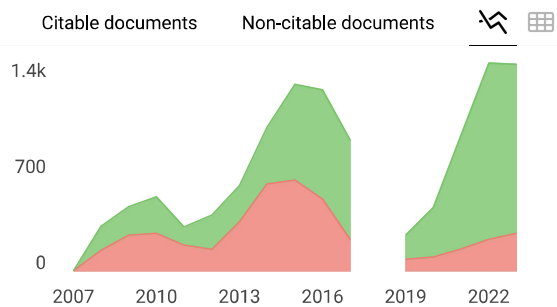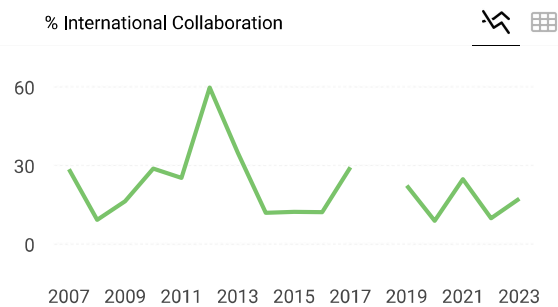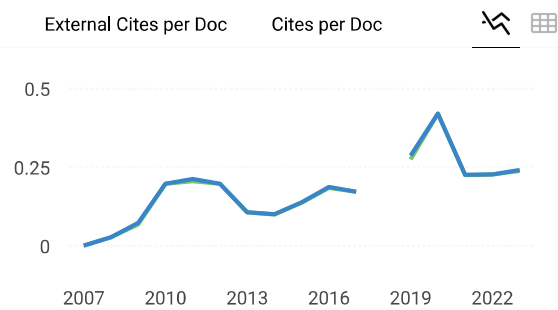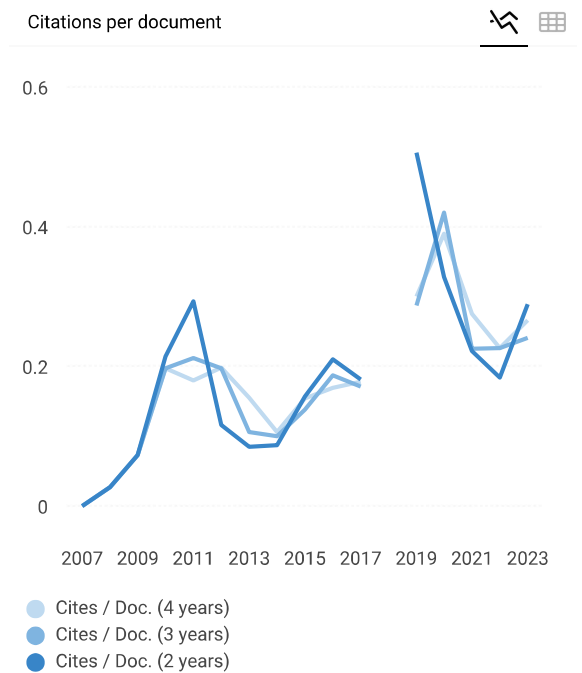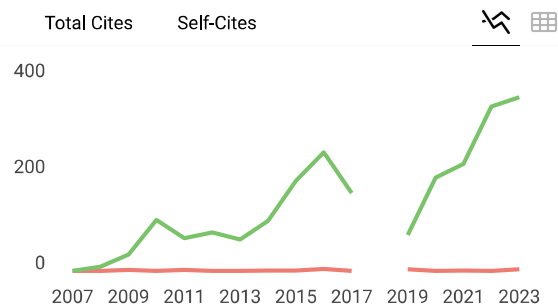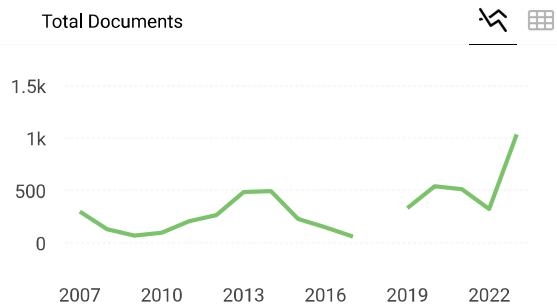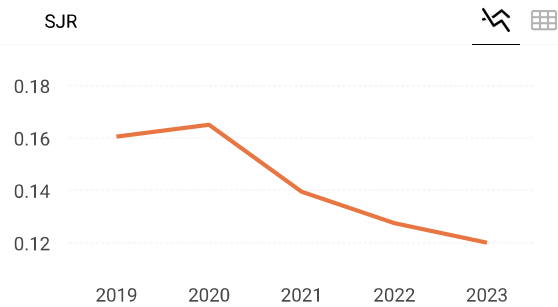

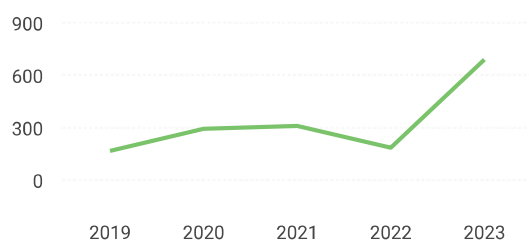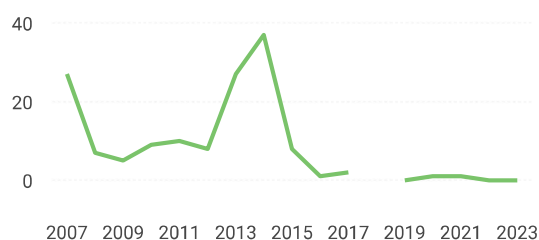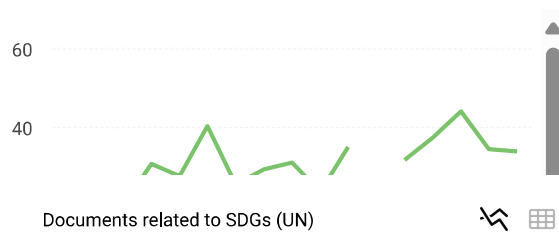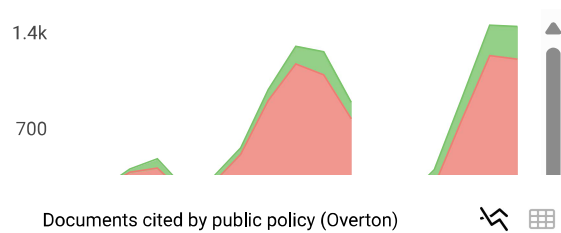


← Show this widget in your own website

Just copy the code below and paste within your html code:

`<a href="https://www.scimagojr.com"`

SCImago Graphica

Explore, visually communicate and make sense of data with our **new data visualization tool.**



Metrics based on Scopus® data as of March 2024

Siyaram Prasad Sah 10 months ago

Dear Editor,

Sir I want to publish my Manuscript on the topics "Detection of Protozoa in drinking water of Kathmandu Valley, Nepal. so what is the procedure

reply



Melanie Ortiz 10 months ago

SCImago Team

Dear Siyaram,

Thank you for contacting us.

We suggest you visit the journal's homepage (See submission/author guidelines) or contact the journal's editorial staff , so they could inform you more deeply.





Source details

Environmental Science and Engineering

Years currently covered by Scopus: from 2007 to 2024

Publisher: Springer Nature

ISSN: 1863-5520 E-ISSN: 1863-5539

Subject area: Computer Science: Information Systems Environmental Science: Environmental Engineering

Source type: Book Series

[View all documents >](#)

[Set document alert](#)

[Save to source list](#)

CiteScore 2023
0.3 ⓘ

SJR 2023
0.120 ⓘ

SNIP 2023
0.053 ⓘ

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

CiteScore 2023

0.3 = $\frac{748 \text{ Citations 2020 - 2023}}{2,329 \text{ Documents 2020 - 2023}}$

Calculated on 05 May, 2024

CiteScoreTracker 2024 ⓘ

0.4 = $\frac{875 \text{ Citations to date}}{2,221 \text{ Documents to date}}$

Last updated on 08 July, 2024 • Updated monthly

CiteScore rank 2023 ⓘ

Category	Rank	Percentile
Computer Science		
Information Systems	#378/394	4th
Environmental Science		
Environmental Engineering	#191/197	3rd

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site](#)

ICEST
2023

Invited Speaker
CERTIFICATE

This Is To Proudly Certify That:

Prof. Willyanto Anggono

has made excellent invited speech titling

*Briquette Combustion Characteristics of Cerbera manghas Leaves
with Rejected Pineapple as Binding Agent as a Sustainable Fuel*

during 2023 14th International Conference on Environmental Science and Technology held in
Shandong University, Qingdao, China during October 23-25, 2023


Supported by



山东大学(青岛)
SHANDONG UNIVERSITY, QINGDAO



Technically Supported by



Conference Chair

ICEST 2023

October 23-25, 2023

Chapter 14

Briquette Combustion Characteristics of *Cerbera manghas* Leaves with Rejected Pineapple as Binding Agent as a Sustainable Fuel



Willyanto Anggono, Resmana Lim, Teng Sutrisno, Ivan Christian Hernando, and Alexander Billy Christensen

Abstract Litter from fallen leaves of the *Cerbera manghas* plant is commonly found throughout Indonesia. Various studies have shown that briquettes formed from the falling leaves of *Cerbera manghas* may be able to reduce waste and be used as a new energy source. However, previous studies employed tapioca as a binding agent for briquettes, which is an edible starch, and their use as a binder competes with the availability of food resources. Alternatively, rejected pineapple would be used as a binding agent to remedy the problem since it is not edible and reduces unused waste. The briquette was subsequently researched to determine the optimal production parameters as well as its potential as a sustainable fuel. The 95% to 5% ratio of biomass to briquette is used to achieve a high calorific value of 4338.79 kcal/kg while maintaining the structure of the briquette in check. The usage of this briquette is supported by both the calorific value test and ultimate analyses. According to the research on the four combustion characteristics (ignition time, burning temperature, combustion rate, and burning time), the composition that gives the best briquette is obtained by using a particle size of 60 mesh and compressed by the hydraulic pressure of 2 MPa.

Keywords Biomass · Briquette · Inedible · *Cerbera manghas* · Pineapple waste

W. Anggono (✉) · R. Lim · T. Sutrisno · I. C. Hernando · A. B. Christensen
Centre for Sustainable Energy Studies, Petra Christian University, Surabaya, Indonesia
e-mail: willy@petra.ac.id

W. Anggono · T. Sutrisno · I. C. Hernando · A. B. Christensen
Mechanical Engineering Department, Petra Christian University, Surabaya, Indonesia

R. Lim
Electrical Engineering Department, Petra Christian University, Surabaya, Indonesia

14.1 Introduction

The world's energy demand has continuously increased year by year, and with it, the supply of fossil fuels will only keep diminishing more each year (Pambudi et al. 2017). Fossil fuels are also non-renewable and not environmentally friendly (Kotcher et al. 2019). Therefore, another form of energy must be introduced in order to keep up with the ever-increasing energy demand, one of them being renewable energy from biomass. Not only does biomass energy have the potential to replace fossil fuels, but it is also more environmentally friendly than fossil fuels as it has the potential to be carbon neutral (Tian and You 2019). Furthermore, it is available from a wide range of sources such as animal waste and civil waste (Bot et al. 2022). One of the ways to utilize these biomasses as a source of energy is through direct combustion (Thipkhunthod et al. 2005). However, burning these biomasses directly without processing them is not advisable as they have a lot of moisture content which hinders combustion performance. Furthermore, due to their low bulk density, it is hard and expensive to transport (Sengar et al. 2012). All of these shortcomings can be overcome by processing them into briquettes as they have lower moisture content and higher bulk density, hence making them easier to transport while also having better combustion properties (Mwampamba et al. 2013; Stolarski et al. 2013; Sakkampang and Wongwuttanasatian 2014). Furthermore, there is a net positive gain of energy from converting biomass to briquettes. Briquettes are also socially beneficial as they enable people living in rural areas to get additional income and are a great energy source (Bot et al. 2022). Nevertheless, since there is a wide range of biomass selections originating from plant or fruit wastes (Brunerová et al. 2017) with differing properties, each of these biomasses must be studied separately to determine its performance as a briquette (Bilgili et al. 2017).

A certain study in Indonesia has determined the possibility of forming briquettes from *Cerbera manghas* leaves (Anggono et al. 2016). The leaves of the *Cerbera manghas* tree are usually considered waste because they don't have a practical use and form waste that is burned most of the time. Burning these leaves wastes valuable energy resources that could otherwise be used, and at the same time contributes to the production of greenhouse gases. Previous studies (Anggono et al. 2016, 2017, 2018) have also shown that converting waste leaves into a more compact type of briquettes rather than simply burning them improves the fuel quality of the leaves. Moreover, a previous study (Anggono et al. 2016) showed that briquettes made from the leaves of *Cerbera manghas* have a calorific value comparable to other briquettes.

Previous studies (Anggono et al. 2016, 2017, 2018) have solved the main problem of waste disposal by converting leaves into briquettes, but there are also drawbacks. In these studies, tapioca flour was used as a binding agent for briquettes. Tapioca is an edible source that competes with the availability of food resources when also used for making briquette (Lewandowski 2015; Girotto et al. 2015). With the prevalence of food waste and food shortages in some areas today, using food resources to make briquettes is not recommended. Therefore, alternatives to tapioca flour for use as

briquette binders must be considered and researched to maintain the availability of the resource food.

Rejected pineapple has the potential to change tapioca as a binding agent because it contains natural fibers and sugars. These rejected pineapples originated from pineapples that have been screened but are classified as unsellable due to poor. Furthermore, they are often separated from the edible fruit and left to rot, resulting in unsightly and inedible waste. This waste can be reduced by using it as a binder for briquette. In fact, one study (Anggono et al. 2020) found the feasibility of discarded pineapple as a binder replacement for tapioca flour with superior quality compared to other common briquettes, suggesting that discarded pineapple is also a good tapioca substitute.

The aim of the current study is to determine the impact and feasibility of substituting discarded pineapple for tapioca as a binder for renewable energy sources. This study thoroughly inspects the quality of briquettes using bomb calorimeters, final analysis, and combustion characteristics testing. To measure the change in calorific value with the use of tapioca compared to pineapples sorted with different ratios of biomass and binder, a test using a bomb calorimeter is performed. Calorific value tests and a final analysis of briquettes were conducted to determine their practical usability. Combustion property tests were conducted to determine the ideal production settings for *Cerbera manghas* leaves from *Cerbera manghas* tree as shown in Fig. 14.1, briquettes, and pineapple waste as shown in Fig. 14.2.



Fig. 14.1 *Cerbera manghas* tree



Fig. 14.2 Rejected pineapple

14.2 Experimental Method

The raw materials for the briquettes, *Cerbera manghas* leaves and discarded pineapples, were easily collected as most of them were considered waste. After collecting them, the *Cerbera manghas* leaves were dried in the sun for a week to reduce their moisture content. After sufficient exposure to sunlight, the leaves were torn into small pieces with various biomass sizes as shown in Fig. 14.3. The pineapple was then crushed into a viscous material, as shown in Fig. 14.4. Combining the crushed leaves with the crushed pineapple acts as a binding agent and is placed in a mold as shown in Fig. 14.5. Compress into briquettes under hydraulic pressure using the press shown in Fig. 14.6.

The first inspection of the briquettes was a bomb calorimeter test using a 1341 Plain Jacket Oxygen Bomb Calorimeter, as shown in Fig. 14.7. Briquettes undergo calorific value testing and final analysis according to ASTM standards. Finally, the combustion properties of briquettes were evaluated in terms of burning velocity, burning temperature, burning time, and ignition time. A final experiment was performed by varying the size of the biomass and the pressure used to condense the briquettes. The particle size of the biomass was altered for 20 mesh (800 μm), 40 mesh (425 μm), and 60 mesh (250 μm). The hydraulic pressure was set at 1 and 2 MPa. Various combinations of particle size and hydraulic pressure were investigated, and the combination that produced the best combustion characteristics was determined. The test was repeated three times and the results were averaged and found to be significant. The briquette results can be seen in Fig. 14.8.



Fig. 14.3 Shredded *Cerbera manghas* leaves



Fig. 14.4 Smashed rejected pineapple



Fig. 14.5 Press mold



Fig. 14.6 Hydraulic press machine

14.3 Results and Discussion

The briquette in this study uses a 95 to 5% biomass-to-binder ratio as it provides a high calorific value while also keeping the rigidity of the briquette in check (Anggono et al. 2020; Gotama et al. 2021). The result of the calorific value test shows that the briquette has a calorific value of $4347.46 \text{ kcal kg}^{-1}$ according to the ASTM D



Fig. 14.7 Oxygen bomb calorimeter

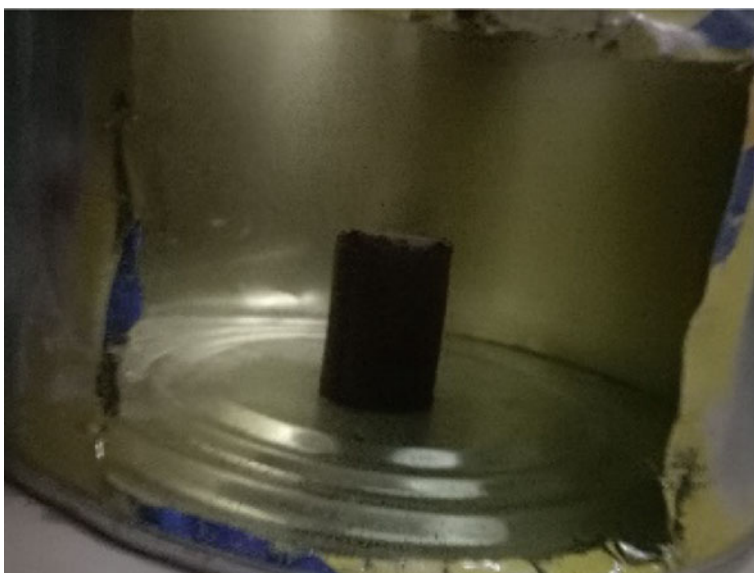


Fig. 14.8 Briquette made from *Cerbera manghas* leaves with rejected pineapple

5865—13 standards. The calorific value is comparable to other biomass briquettes mentioned in Table 14.1 (Anggono et al. 2016, 2017, 2018). Since tapioca has a higher caloric value (3574.47 kcal/kg) (Anggono et al. 2016), the tapioca-bonded briquette has a higher caloric value than the pineapple bonded briquette (435.02 kcal/kg). Table 14.2 shows the result of the ultimate analysis. The combined weight of the carbon and hydrogen contributes to the calorific value as they are the primary combustible elements.

The effects of different particle sizes and hydraulic pressure on the burning temperature are shown in Fig. 14.9a. The higher burning temperature the more it is desired because it gives higher heat transfer, which is achieved by using smaller particle size and higher compression pressure. The maximum burning temperature (547 °C) was found for a briquette with a compression pressure of 2 MPa and particle size of 60 mesh.

Figure 14.9b shows the effect of different particle sizes and hydraulic pressure on ignition time. Ignition time refers to the time it takes to ignite the briquette (Anggono et al. 2017). A longer ignition time may be achieved by having briquette of a smaller particle size and higher compression pressure. The peak ignition time (296 s) is observed for briquettes with a compression pressure of 2 MPa and particle size of 60 mesh.

Table 14.1 Comparison between 95% *Cerbera manghas* leave waste briquettes with 5% rejected pineapple to other briquettes

Biomass source	Binder	Biomass to binder ratio	Calorific value (kcal kg ⁻¹)
<i>Cerbera manghas</i> leaves	Rejected pineapple	95%:5%	4347.46
<i>Cerbera manghas</i> leaves (Anggono et al. 2016)	Tapioca	90%:10%	4164.00
<i>Pterocarpus indicus</i> leaves (Gotama et al. 2021)	Rejected pineapple	95%:5%	4169.76
<i>Pterocarpus indicus</i> leaves (Anggono et al. 2018)	Tapioca	90%:10%	4648

Table 14.2 95% *Cerbera manghas* leaves and 5% rejected pineapple briquette ultimate analysis

Parameters	Unit	As received	Test method
Carbon	[% wt]	43.85	ASTM D 5373–16
Hydrogen	[% wt]	5.12	ASTM D 5373–16
Nitrogen	[% wt]	2.93	ASTM D 5373–16
Oxygen	[% wt]	25.86	ASTM D 3176–15

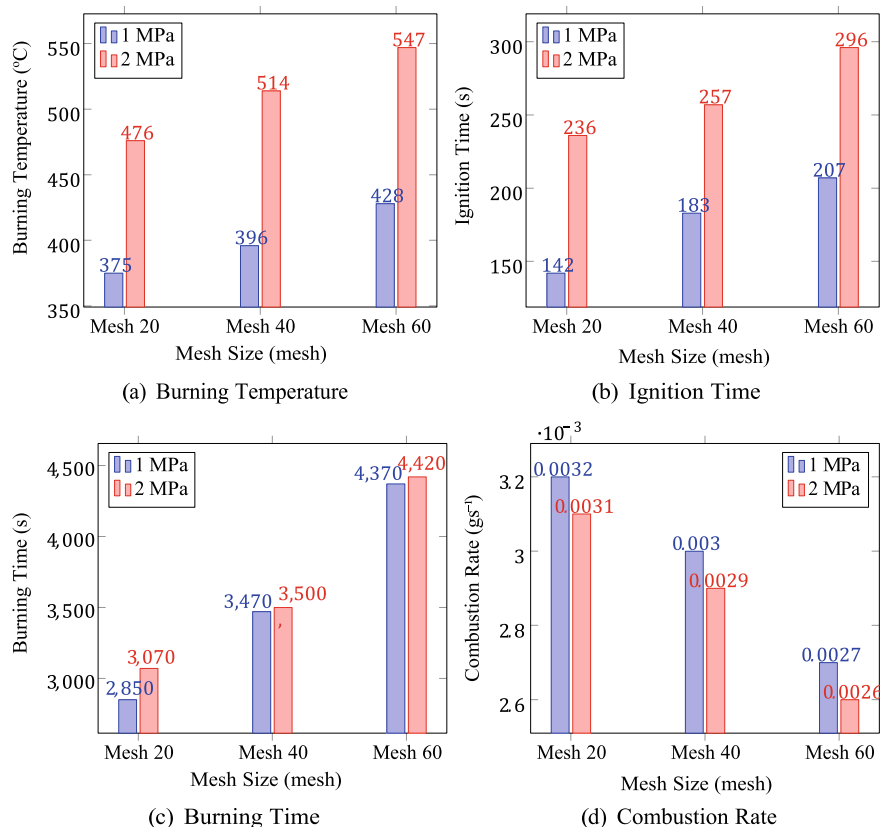


Fig. 14.9 *Cerbera manghas* leaves and rejected pineapple briquette combustion characteristics

The impact of various particle sizes and hydraulic pressures on the burning time is given in Fig. 14.9c. The burning time indicates the time required for the fuel to reduce into ashes after being ignited (Anggono et al. 2017). A long burning time can be achieved by a briquette with a smaller particle size and larger compressing pressure. Peak burning time (4420 s) was found in a briquette with 2 MPa compacting pressure and particle size of 60 mesh.

The effects of different particle sizes and hydraulic pressure on the combustion rate are shown in Fig. 14.9d. The combustion rate shows how fast the combustible components of the fuel are consumed when the briquette is burned (Anggono et al. 2017). A faster combustion rate results in a shorter burning duration. A slower combustion rate may be achieved with a smaller particle size and higher compacting pressure. The lowest combustion rate (0.0026 g s^{-1}) is observed for briquettes with a compression pressure of 2 MPa and a biomass size of 60 mesh.

There is no significant difference in the burning time and the combustion rate at different hydraulic pressure levels studied. However, these results are consistent

with previous studies showing that greater hydraulic pressure resulted in longer burning duration and faster combustion rate (Anggono et al. 2017). As for burning temperature and ignition time, it shows that higher compacting pressure resulted in higher temperature and longer ignition duration of the briquette. This increased combustion performance can be attributed to the denser briquette produced with higher hydraulic pressure during fabrication. Denser briquettes have more fuel mass per unit volume, resulting in higher burning temperature from higher energy release compared to the less dense briquette. However, it also means that denser briquettes take more time to be ignited.

14.4 Conclusion

The results of this study suggested that 95% *Cerbera manghas* leave waste briquettes with 5% rejected pineapple give briquette with good structural integrity and a high calorific value of 4347.46 kcal kg⁻¹, which is comparable to other briquettes that use a 95 to 5% biomass to binder ratio. The use of rejected pineapple to replace tapioca as a binding agent has led to the reduction of the overall calorific value of the briquette. Nevertheless, the results of the calorific value and ultimate analysis tests show that the briquettes using *Cerbera manghas* leaves and rejected pineapples as briquette binders can be used as a renewable energy source. Combustion characteristics analysis suggests that the optimal production parameters for briquettes are 2 MPa hydraulic pressure and 60 mesh size or 250 µm particle size. These 2 parameters resulted in a briquette with a combustion rate of 0.0026 g s⁻¹, a burning temperature of 547 °C, a burning time of 4420 s, and an ignition time of 296 s.

References

- Anggono W, Suprianto FD, Gotama GJ, Evander J, Kasrun AW (2016) Investigation on biomass briquette as energy source from waste leaf *Cerbera Manghas*. *Int J Ind Res Appl Eng* 1(1):11–14
- Anggono W, Sutrisno T, Suprianto FD, Evander J (2017) Biomass briquette investigation from *pterocarpus indicus* leaves waste as an alternative renewable energy. In: IOP conference series: materials science and engineering, vol 241(1), pp 1–5
- Anggono W, Suprianto FD, Gotama GJ, Sutrisno T, Evander J (2018) Combustion characteristics behavior of *pterocarpus indicus* leaves waste briquette at various particle size and pressure. In: IOP conference series: materials science and engineering, vol 417, pp 012007
- Anggono W, Sutrisno, T, Suprianto FD, Yulio AFX, Jeremy GJ (2020) Combustion performance of *pterocarpus indicus* leaves wastes briquette with rejected papaya as binding agent. In: IOP conference series: earth and environmental science, vol 581, pp 012020
- Bilgili F, Koçak E, Bulut Ü, Kuşkaya S (2017) Can biomass energy be an efficient policy tool for sustainable development? *Renew Sustain Energy Rev* 71(C):830–845
- Bot BV, Axaopoulos PJ, Sakellariou EI, Sosso OT, Tamba JG (2022) Energetic and economic analysis of biomass briquettes production from agricultural residues. *Appl Energy* 321:119430